

PAIRING BLUETOOTH® MIC

The pairing button on the base unit blinks red when it has power, but the mic is not on or connected.

Once the BT mic connects, the pairing button on the base will blink green. If the wired mic is connected and turned on, the pairing button on the base turns off.

When the BT mic is turned on, it will display the POWER ON screen with a blinking BT indicator and red blinking RX/TX indicator.

After it connects with the base, there is a "Base Unit Connected" voice prompt, the BT indicator on the display lights steady, and the red blinking RX/TX indicator turns off. Additionally, all channel information is displayed.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference including received interference that may cause undesired operation.

The grantee is not responsible for any changes or modifications not expressly approved by the party responsible for compliance. Such modifications could void the user's authority to operate the equipment. Replacement of any transmitter component (crystal, semiconductor, etc.) not authorized by the FCC equipment authorization for this radio could violate FCC rules.

MIDLAND®

Follow us:



5900 Parretta Drive, Kansas City, MO 64120

Features and specifications subject to change without notice.

Visit midlandusa.com for more information on genuine Midland accessories for all Midland MicroMobile® products.

©2026 Midland Radio Corporation. All Rights Reserved.



QUICK START GUIDE MXMC95

Wireless
Bluetooth
Microphone




Quick Start Guide

RADIO OPERATION

1. Rotate the Power/Volume Knob clockwise to turn the radio on. A "Base Unit Connected" voice prompt will be heard when the Bluetooth® microphone connects to the radio base.
2. Rotate the Power/Volume Knob further clockwise to increase the radio volume or counterclockwise to decrease the radio volume. The monitor function may be engaged to generate audible noise to aid in setting the volume. Press and hold the WX/MON button to toggle the monitor function on and off. (Figure A)
3. Use the UP and DOWN buttons on the radio microphone to select the radio channel. (Figure B)
4. Press and hold the PTT button and speak into the microphone to initiate communication. Release the PTT button to hear the reply.
5. Press and release the WX/MON button to enter or exit weather mode.
6. Rotate the Power/Volume Knob fully counterclockwise to turn the radio off.


Note: If using the wired microphone, insert the microphone's plug into the radio's microphone jack. Line up the connector key with the slot, push in, and twist the locking ring clockwise.

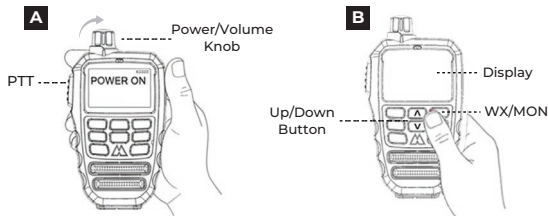

PAIRING BLUETOOTH® MIC

The radio and included Bluetooth microphone are paired from the factory. If a different microphone needs to be paired to the radio, use the following procedure.

1. Turn the microphone on. Since the microphone is not yet paired with the radio, it will pause at the POWER ON screen.
2. From the Power On screen, press and hold both the UP and DOWN buttons on the microphone until the RX/TX LED begins to blink red, green, and blue.
3. Press and hold the pairing button on the base unit for five seconds.
4. After the pairing button is released, the pairing button will blink red and green until the pairing process completes.

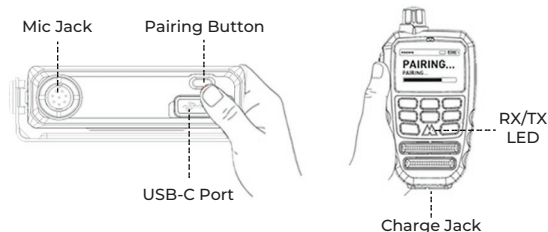

(Cont'd)

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter.

Radiation Exposure Statement

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum distance of 0cm from your body.