


HOTO PULSE





Visit our website for more Cool Tools
(www.hototools.com)

01 General Power Tool Safety

WARNING! Read all safety warnings, instructions, illustrations and specifications provided with this power tool. Failure to follow all instructions listed below may result in electric shock, fire and/or serious injury.

Save all warnings and instructions for future reference.

The term "power tool" in the warnings refers to your mains-operated (corded) power tool or battery-operated (cordless) power tool.

Work area safety

- **Keep work area clean and well lit.** Cluttered or dark areas invite accidents.
- **Do not operate power tools in explosive atmospheres, such as in the presence of flammable liquids, gases or dust.** Power tools create sparks which may ignite the dust or fumes.
- **Keep children and bystanders away while operating a power tool.** Distractions can cause you to lose control.

Electrical safety

- **Power tool plugs must match the outlet. Never modify the plug in any way. Do not use any adapter plugs with earthed (grounded) power tools.** Unmodified plugs and matching outlets will reduce risk of electric shock.
- **Avoid body contact with earthed or grounded surfaces, such as pipes, radiators, ranges and refrigerators.** There is an increased risk of electric shock if your body is earthed or grounded.
- **Do not expose power tools to rain or wet conditions.** Water entering a power tool will increase the risk of electric shock.

- **Do not abuse the cord.** Never use the cord for carrying, pulling or unplugging the power tool. Keep cord away from heat, oil, sharp edges or moving parts. Damaged or entangled cords increase the risk of electric shock.
- **When operating a power tool outdoors, use an extension cord suitable for outdoor use.** Use of a cord suitable for outdoor use reduces the risk of electric shock.
- **If operating a power tool in a damp location is unavoidable, use a residual current device (RCD) protected supply.** Use of an RCD reduces the risk of electric shock.
- **Instructions for class III appliances state that it must only be supplied at SELV**


Personal safety

- **Stay alert, watch what you are doing and use common sense when operating a power tool. Do not use a power tool while you are tired or under the influence of drugs, alcohol or medication.** A moment of inattention while operating power tools may result in serious personal injury.
- **Use personal protective equipment. Always wear eye protection.** Protective equipment such as a dust mask, non-skid safety shoes, hard hat or hearing protection used for appropriate conditions will reduce personal injuries.
- **Prevent unintentional starting. Ensure the switch is in the off-position before connecting to power source and/or battery pack, picking up or carrying the tool.** Carrying power tools with your finger on the switch or energising power tools that have the switch on invites accidents.
- **Remove any adjusting key or wrench before turning the power tool on.** A wrench or a key left attached to a rotating part of the power tool may result in personal injury.

- **Do not overreach. Keep proper footing and balance at all times.** This enables better control of the power tool in unexpected situations.
- **Dress properly. Do not wear loose clothing or jewellery. Keep your hair and clothing away from moving parts.** Loose clothes, jewellery or long hair can be caught in moving parts.
- **If devices are provided for the connection of dust extraction and collection facilities, ensure these are connected and properly used.** Use of dust collection can reduce dust-related hazards.
- **Do not let familiarity gained from frequent use of tools allow you to become complacent and ignore tool safety principles.** A careless action can cause severe injury within a fraction of a second.
- This product is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the product by a person responsible for their safety.

02 Product Information

This tool is for stapling objects, such as cloth, leather, cardboard, thin film, insulation and etc, on soft workpiece like wood by using heavy duty staples and brad nails. Please do not use this tool against wall.

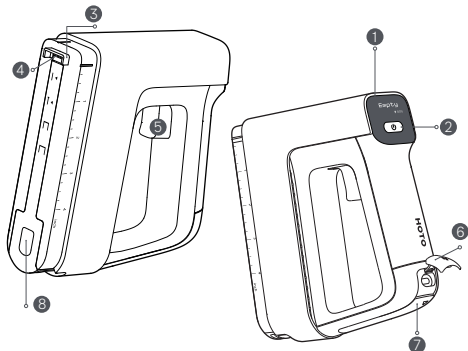

① Display

② On/Off Button

③ Workpiece Contact Bracket

④ Releasing Point

⑤ Trigger


⑥ Charging Port

⑦ Nail Puller



⑧ Magazine Latch

03 How to Use


- Press the latch and pull out the magazine.
- Insert the staples into the magazine channel. Press the latch and close the magazine.

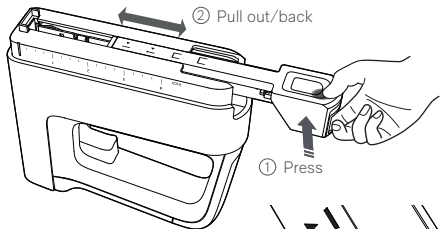

Nail Loading Direction




- Press and hold the On/Off button. The screen will light up and display "Loaded".



- Point the contact bracket at the workpiece.
- Press the contact bracket against the workpiece (A), when the screen displays "READY" (B) then pull the trigger (C).



- Short yellow reference line: to assist in determining the firing point of short nails and long nails.





- Side yellow reference line: to assist in determining the firing point of all compatible fasteners.

- After finishing work, press and hold the on/off button until the screen displays "BYE" to shut down.





04 Continuous Firing Mode

- Keep the trigger depressed.
- The tool fires when the contact bracket is pressed against the workpiece.



05 Staple/Nail Puller Operation

- A detachable nail puller is located at the bottom of the tool. Use it to remove staples.



Compatible Fasteners


TYPE	WIRE	CROWN	LEG LENGTH
	1.2 mm (0.047 in)	10.6–11.3 mm (0.417–0.445 in)	8–14 mm (0.31–0.55 in)
	0.7 mm (0.028 in)	10.6–11.3 mm (0.417–0.445 in)	8–14 mm (0.31–0.55 in)
	1.2 mm (0.047 in)	2.0 mm (0.079 in)	15 mm (0.59 in)
	1.2 mm (0.047 in)	1.0 mm (0.039 in)	15 mm (0.59 in)

06 Loading & Countdown Function

- When the tool is powered on without staples or nails, the screen displays "Empty."
- When staples or nails are properly loaded, the screen displays "Loaded."



- When the remaining staples or nails count reaches 10, the screen begins counting down.



⚠ Note:

- If the initial staple or nail load is insufficient(≤ 20), or if the magazine is opened during the countdown, the countdown function will fail.
- If mixed staple or nail types are loaded, the countdown function will fail. This may also cause jams and damage the device.


⚠ Warning:

- While loading staples or nails, ensure the device is turned off or it could result in injury.
- The staple legs should point outwards away from tool body, or it could result in injury.
- Do not use damaged or bent staples.
- Do not load a single staple, it may cause jam.
- Do not over-load staple, please load staples properly.
- Please remove all staples after use.

- A yellow reference line is given at the front of the tool to help users determine the firing point of the nail before nailing. As different nail types, material hardness, and operating angles may affect the actual firing point, testing on scrap material before work is recommended.

07 Battery Charging

- When the battery is low, a warning appears on the screen.
- When the battery level becomes critically low, the screen displays a warning icon and the tool powers off.
- The screen shows the charging progress during charging.
- After charging is complete, the screen displays 100%.

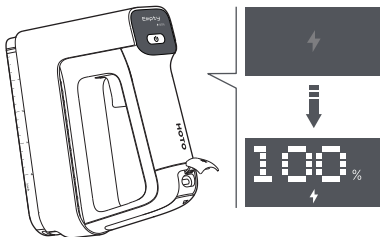

08 Maintenance

- Do not disassemble the tool.
- Repairs and maintenance should be performed by qualified technicians or an authorized service center.
- Use a dry, clean, lint-free cloth to remove dust from the exterior of the tool.
- Clean the tool carefully to ensure it remains in good working condition.
- Do not use corrosive chemicals or cleaners. Do not use abrasive cleaners, alcohol, gasoline, or other liquid cleaners.

Power tool use and care

- **Do not force the power tool. Use the correct power tool for your application.** The correct power tool will do the job better and safer at the rate for which it was designed.
- **Do not use the power tool if the switch does not turn it on and off.** Any power tool that cannot be controlled with the switch is dangerous and must be repaired.
- **Disconnect the plug from the power source and/or remove the battery pack, if detachable, from the power tool before making any adjustments, changing accessories, or storing power tools.** Such preventive safety measures reduce the risk of starting the power tool accidentally.
- **Store idle power tools out of the reach of children and do not allow persons unfamiliar with the power tool or these instructions to operate the power tool.** Power tools are dangerous in the hands of untrained users.
- **Maintain power tools and accessories.** Check for misalignment or binding of moving parts, breakage of parts and any other condition that may affect the power tool's operation. If **damaged, have the power tool repaired before use.** Many accidents are caused by poorly maintained power tools.

- **Use the power tool, accessories and tool bits etc. in accordance with these instructions, taking into account the working conditions and the work to be performed.** Use of the power tool for operations different from those intended could result in a hazardous situation.
- **Keep handles and grasping surfaces dry, clean and free from oil and grease.** Slippery handles and grasping surfaces do not allow for safe handling and control of the tool in unexpected situations.

Battery tool use and care

- **Recharge only with the charger specified by the manufacturer.** A charger that is suitable for one type of battery pack may create a risk of fire when used with another battery pack.
- **Use power tools only with specifically designated battery packs.** Use of any other battery packs may create a risk of injury and fire.
- **When battery pack is not in use, keep it away from other metal objects, like paper clips, coins, keys, nails, screws or other small metal objects, that can make a connection from one terminal to another.** Shorting the battery terminals together may cause burns or a fire.
- **Under abusive conditions, liquid may be ejected from the battery; avoid contact. If contact accidentally occurs, flush with water. If liquid contacts eyes, additionally seek medical help.** Liquid ejected from the battery may cause irritation or burns.
- **Do not use a battery pack or tool that is damaged or modified.** Damaged or modified batteries may exhibit unpredictable behavior resulting in fire, explosion or risk of injury.

- **Do not expose a battery pack or tool to fire or excessive temperature.** Exposure to fire or temperature above 130°C may cause explosion.
- **Follow all charging instructions and do not charge the battery pack or tool outside the temperature range specified in the instructions.** Charging improperly or at temperatures outside the specified range may damage the battery and increase the risk of fire.

Service

- **Have your power tool serviced by a qualified repair person using only identical replacement parts.** This will ensure that the safety of the power tool is maintained.
- **Never service damaged battery packs.** Service of battery packs should only be performed by the manufacturer or authorized service providers.

Safety instructions when using long drill bits

- **Never operate at higher speed than the maximum speed rating of the drill bit.** At higher speeds, the bit is likely to bend if allowed to rotate freely without contacting the workpiece, resulting in personal injury.
- **Always start drilling at low speed and with the bit tip in contact with the workpiece.** At higher speeds, the bit is likely to bend if allowed to rotate freely without contacting the workpiece, resulting in personal injury.
- **Apply pressure only in direct line with the bit and do not apply excessive pressure.** Bits can bend causing breakage or loss of control, resulting in personal injury.

Safety warning of Rotary Tool Kit

Hold the tool by the insulated gripping surface if the cutting and drilling accessories could contact hidden wires during operation. Were cutting and drilling accessories to contact live wires, exposed metal parts may conduct the electricity and cause electric shock to the operator.

Safety Instructions for Drill/Driver

Hold the power tool by insulated gripping surfaces, when performing an operation where the cutting accessory or fasteners may contact hidden wiring. Cutting accessory contacting a "live" wire may make exposed metal parts of the power tool "live" and could give the operator an electric shock.

Additional safety information

- **Secure the workpiece.** A workpiece clamped with clamping devices or in a vice is held more secure than by hand.
- **Always wait until the power tool has come to a complete stop before placing it down.** The application tool can jam and cause you to lose control of the power tool.
- **Switch the power tool off immediately if the application tool becomes blocked.** Be prepared for high torque reactions which cause kickback. The application tool becomes blocked when it becomes jammed in the workpiece or when the power tool becomes overloaded.
- **Use suitable detectors to determine if there are hidden supply lines or contact the local utility company for assistance.** Contact with electric cables can cause fire and electrical shock. Damaging gas lines can lead to explosion. Breaking water pipes causes property damage.

- **Hold the power tool securely.** When tightening and loosening screws be prepared for temporarily high torque reactions.
- **In case of damage and improper use of the battery, vapours may be emitted.** The battery can set alight or explode. Ensure the area is well ventilated and seek medical attention should you experience any adverse effects. The vapours may irritate the respiratory system.
- **Do not open the battery.** There is a risk of short-circuiting.
- **The battery can be damaged by pointed objects such as nails or screwdrivers or by force applied externally.** An internal short circuit may occur, causing the battery to burn, smoke, explode or overheat.
- **Only use the battery with products from the manufacturer.** This is the only way in which you can protect the battery against dangerous overload.
- **Protect the battery against heat, e.g. against continuous intense sunlight, fire, dirt, water and moisture.** There is a risk of explosion and short-circuiting. This product has a built-in battery. Please store, use, and charge this product within the recommended temperature range. Operating temperature: 0°C~45°C; Charging temperature: 0°C~45°C; Storage temperature: -20°C~25°C."

Information: The declared vibration total value(s) and the declared noise emission value(s) have been measured in accordance with a standard test method and may be used for comparing one tool with another; The declared vibration total value(s) and the declared noise emission value(s) may also be used in a preliminary assessment of exposure.

The vibration and noise emissions during actual use of the power tool can differ from the declared values depending on the ways in which the tool is used especially what kind of workpiece is processed; and It is necessary to identify safety measures to protect the operator that are based on an estimation of exposure in the actual conditions of use (taking account of all parts of the operating cycle such as the times when the tool is switched off and when it is running idle in addition to the trigger time).

Declaration of the noise emission values according to EN 62841 (considered uncertainty 5 dB (A))

Sound pressure level: 6/dB (A)

Sound power level: 78 dB (A)

Declaration of the vibration emission according to EN 62841 (considered uncertainty 1.5 m/s³): 1.3 m/s

Notes for packaging



The packaging materials are recyclable. Please dispose of packaging in an environmentally friendly manner.

We Shanghai HOTO Technology Co., Ltd., hereby, declares that this equipment is in compliance with the applicable Directives and European Norms, and amendments.



All products bearing this symbol are waste electrical and electronic equipment (WEEE as in directive 2012/19/EU) which should not be mixed with unsorted household waste.

Instead, you should protect human health and the environment by handing over your waste equipment to a designated collection point for the recycling of waste electrical and electronic equipment, appointed by the government or local authorities. Correct disposal and recycling will help prevent potential negative consequences to the environment and human health. Please contact the installer or local authorities for more information about the location as well as terms and conditions of such collection points.

Troubleshooting

Trouble	Troubleshooting
Jam	◦ Staple size is correct or not ◦ Power on or not ◦ Operating properly or not
Unable to charge	Please replace adpater and charging cable to charge
Battery damaged	Contact manufacturer or authorized service agent to repair
Tool does not work	Charge the tool
Staples do not fully penetrate into workpiece	◦ Work-piece is too hard ◦ Contact bracket is not firmly against workpiece
Staples are bended after driving	◦ Work-piece is too hard ◦ Contact bracket is not firmly against workpiece

09 Specification

Name: HOTO Pulse 4-in-1 Cordless Stapler

Model: QWJXA003

Item Dimensions: Approx. 6.69 × 1.89 × 6.54 in (170 × 48 × 166 mm)

Product Net Weight: Approx. 2.27lb (1033 g)

Color: Silver and Black

Rated Input: 5 V $\overline{\text{---}}$ 2 A

Rated Voltage: 3.7 V $\overline{\text{---}}$

Battery Type: Lithium-ion battery

Rated Capacity: 1950 mAh

Operating Temperature: -10°C~40°C

Charging Temperature: 5°C~40°C

Storage Temperature: -10°C~45°C

Operating Noise: Around 85 dB (A)

Rated Power: 44.4 W

Charging Port: USB Type-C

Charging Time: Approx. 1.5hours

EC	REP
-----------	------------

Apex CE Specialists GmbH
Grafenberger Allee 277,
40237 Düsseldorf DE
E-Mail: Info@apex-ce.de

Federal Communications Commission

Supplier's Declaration of Conformity

This supplier's declaration of conformity is hereby for

We declare that the above mentioned device has been tested and found in compliance with CFR 47 Part 15 Regulation.

Product: HOTO Pulse 4-in-1 Cordless Stapler

Product model: QWJXA003

Brand/Trade: HOTO

This device complies with part 15 of the FCC Rules.

Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Caution: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Representative of Responsible Party for SDoC

Company: HOTO (US) TECHNOLOGY CO LTD

Address: 919 North Market Street, Suite 950,
Wilmington DE 19801

Country: U.S.A.

Customer Service(US): +1 855-577-2659

service@hototools.com

Mon-Fri 9:00am-5:00pm(CST)

Manufacturer: Shanghai HOTO Technology Co., Ltd.

Address: Building 45, No. 50, Moganshan Road, Shanghai, China

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular

installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

DECLARATION OF CONFORMITY



EU Declaration of Conformity
We

Shanghai HOTO Technology Co., Ltd.

Declare that the product:

HOTO Pulse 4-in-1 Cordless Stapler/QWJXA003

Complies with the essential health and safety requirements of the
following directives:

2014/30/EU Electromagnetic Compatibility directive References to
the following harmonized standard were made:

EN IEC 55014-1:2021

EN IEC 55014-2:2021

EN IEC 61000-3-2:2019+A1:2021+A2:2024

EN 61000-3-3:2013+A2:2021+AC:2022-01

2011/65/EU+ (EU) 2015/863 Restrictions of the Use of Certain
Hazardous Substances in Electrical and Electronic Equipment

Authorised signatory and technical file holder:

Shanghai HOTO Technology Co., Ltd.

Building 45, No.50 Moganshan Road, Shanghai, China

Designed by **HOTO**