


USER MANUAL

65W 3-Port Power Delivery USB Charger
with Tamper Resistant Outlet



Specifications	
Model No.	USP-2C1A-15-65
Receptacle Rating	15A, 125VAC
Rated Frequency	60Hz
USB Rating	2 USB Type-C: C1: main, C2: secondary 1 USB Type-A: general
	Max 65W
Agreement	PD3.0/PPS (Support Samsung 25W)/ QC3.0/QC2.0/QC4+/FCP/SCP/AFC/ Apple2.4/BC1.2/PE+
Operating Temperature	- 4°F to 104°F (- 20°C to 40°C)
Product Size	4.13in x 1.69in x 1.81in (LxWxD)
Wire Terminals	#14 - #12 AWG

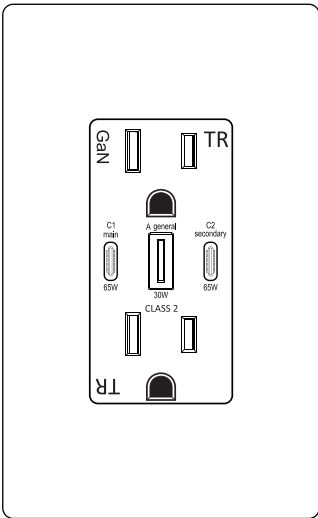

Warnings and Cautions


- To avoid risk of fire, electrical shock and death, turn power off at circuit breaker or fuse and test that power is off before installing.
- To be installed or used in accordance with appropriate electrical codes and regulations.
- If you are not sure about any part of these instructions, consult an electrician. This device CANNOT be used for separate feed applications. If the outlet you are replacing has the top and bottom outlets controlled by separate circuit breakers, you can't use this device.
- Operating at higher temperatures or voltages may cause the overheat protection circuit to trip. If this happens, please reduce the connection load to prevent it from happening again.
- To be used with Class 2 connectors with interconnecting cables. The Class 2 USB ports are not intended for use with appliances and supporting product.
- Use this device with COPPER OR COPPER CLAD WIRE ONLY.

Product Package

Fast Charging Wall Outlet (1 pc)	Inner Plate (1 pc)	Outer Plate (1 pc)
Screws (2 pcs)	Screws (2 pcs)	

NOTE:
This device is to be installed in a wall box measuring at least 3"x2"x2-1/2" (standard single gang electrical wall box) and wired in accordance with NEC article 314 box fill requirements.

Functional Parts Instructions

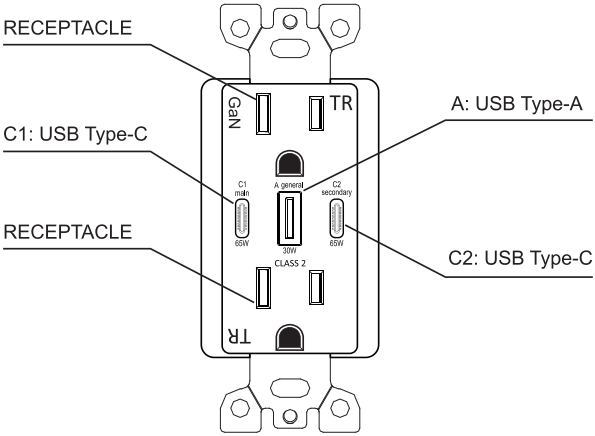

- RECEPTACLE: 15 Amp
- USB Type-(2C+1A): C1: main / C2: secondary / A: general


USB Rating					
Single-port charging					
C1		65W Max.	5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A		
C2		65W Max.	5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A		
A		30W Max.	5V/3A, 9V/3A, 12V/2.5A, 20V/1.5A		
Two-port charging					
C1+C2	C1	45W Max.	5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/2.25A		
	C2	20W Max.	5V/3A, 9V/2.2A, 12V/1.67V		
C1+A	C1	45W Max.	5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/2.25A		
	A	18W Max.			
C2+A	C2+A	15W Max.	5V/3A (shared)		
Three-port charging					
C1+C2+A	C1	45W Max.	5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/2.25A		
	C2+A	15W Max.	5V/3A (shared)		

Installation

Step 1 WARNING: To avoid fire and electrical shock, turn off power at circuit breaker or fuse and test that power is off before wiring.

Step 2 Identify the circuit type

Note: If the wiring in the wall box is different from the following layouts, please consult an electrician.






Single-Pole
① Line (Hot)
② Neutral
③ Ground

Step 3 Typical wire connection (single-pole)

NOTES:

- Connect wires according to the following WIRING DIAGRAM: Black/Hot wire to the HOT terminal. White/Neutral wire to the WHITE terminal. Green or Copper Ground wire to the Green Screw terminal. NOTE: Hot and Neutral wires require #14 - #12 AWG copper or copper clad wire.
- Insert the wire under the crimping piece of the terminal.
- Use a screwdriver to tighten each terminal screw to 12 in-lb (1.4 N·m) of torque (Do Not overtighten) and ensure that no bare conductors are exposed.

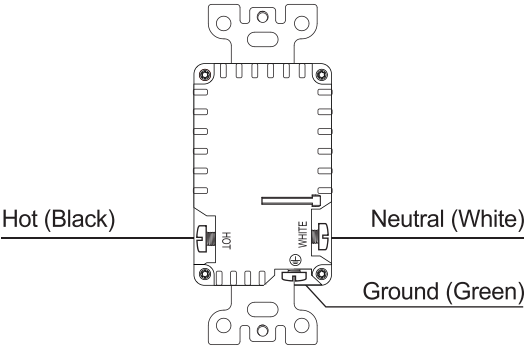

Preparing and Connecting Wires


① Screw Terminal




Side Wire
Clockwise, 2/3 of the way around screw

Preparing and Connecting Wires

② Strip Gauge



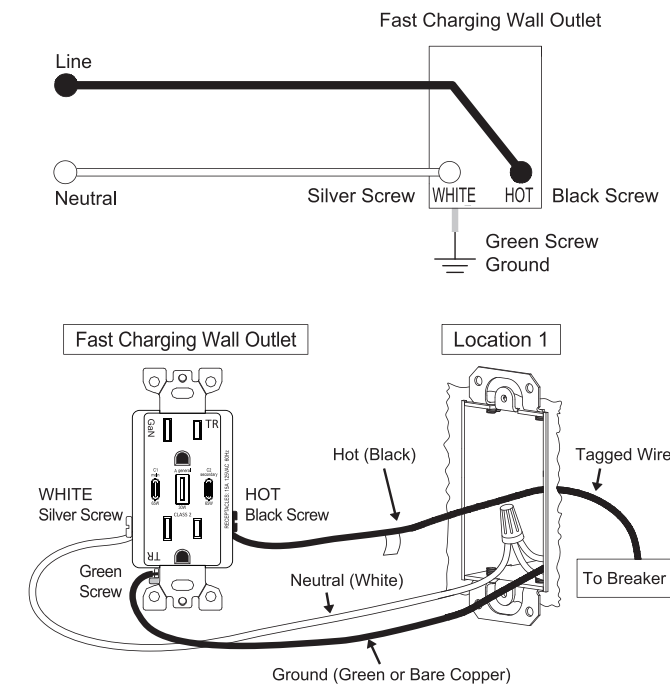


Location 1 Wiring:

- Connect the green screw to the green or bare copper ground wire;
- Connect the black screw to the hot wire of the circuit breaker;
- Connect the silver screw to the neutral wire.


Step 4 Install the fast charging wall outlet

- Carefully position all wires inside the wall box, leaving enough space to insert the outlet. Secure the fast charging wall outlet with the provided mounting screws.

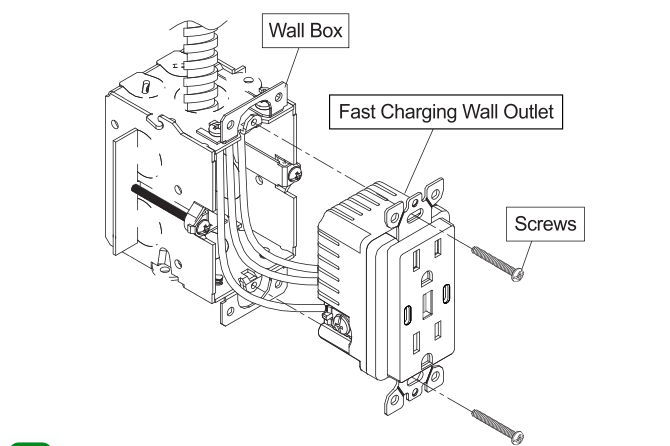

Step 5 Install the wall plate

- Install the inner plate base on fast charging wall outlet and tighten the screws.
- Restore power at circuit breaker or fuse, installation is complete.

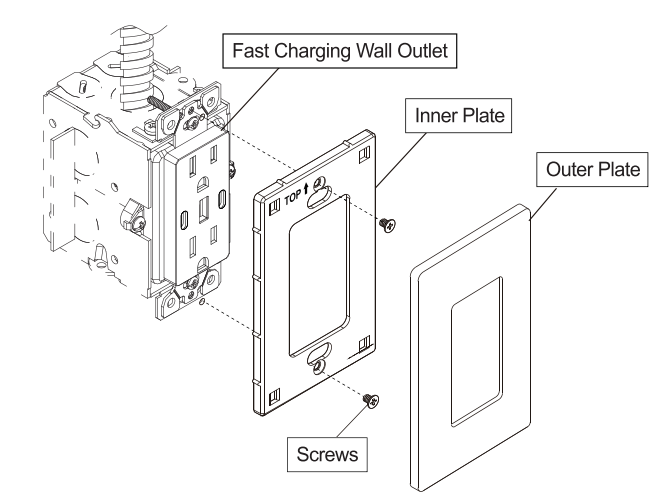

NOTES:

- Turn on the device and then insert your phone or laptop.
- If the devices combined power requirements exceed the power capacity of the USB ports, the charger will automatically shut down to protect your devices.

FCC Information

- This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.
- This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
 - Reorient or relocate the receiving antenna.
 - Increase the separation between the equipment and receiver.
 - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 - Consult the dealer or an experienced radio/TV technician for help.

- Cet appareil est conforme à la partie 15 des règles de la FCC. Son fonctionnement est soumis aux deux conditions suivantes : (1) Ce dispositif ne peut causer d'interférences nuisibles, et (2) cet appareil doit accepter toute interférence reçue, y compris les interférences qui peuvent provoquer un fonctionnement indésirable.
- Cet équipement a été testé et trouvé conforme aux limites pour un dispositif numérique de classe B, conformément à la partie 15 des règles de la FCC. Ces limites sont conçues pour fournir une protection raisonnable contre les interférences nuisibles dans une installation résidentielle. Cet équipement génère, utilise et peut émettre des fréquences radio et, s'il n'est pas installé et utilisé conformément aux instructions, peut causer des interférences nuisibles aux communications radio. Cependant, il n'existe aucune garantie que des interférences ne se produiront pas dans une installation particulière. Si cet équipement provoque des interférences nuisibles à la réception radio ou télévision, ce qui peut être déterminé en allumant et en éteignant, l'utilisateur est encouragé à essayer de corriger l'interférence par un ou plusieurs des mesures suivantes :
 - Réorienter ou déplacer l'antenne de réception.
 - Augmentez la distance entre l'équipement et le récepteur.
 - Branchez l'appareil dans une prise sur un circuit différent de celui sur lequel est branché le récepteur.
 - Consulter le revendeur ou un technicien radio/TV pour l'aide.

FCC Caution

Any changes or modifications to this unit not expressly approved by the manufacturer could void the user's authority to operate the equipment.

Tout changement ou modification non expressément approuvé par la fabrication pourrait annuler l'autorisation de l'utilisateur d'utiliser l'équipement.

Warranty Information

Limited Warranty (Valid only in U.S.A. and Canada)
BESTTEN will, at its option, repair or replace any unit that is defective in materials or manufacture within one year after purchase. For warranty service, BESTTEN will replace the unit for free.

THIS WARRANTY IS IN LIEU OF ALL OTHER EXPRESS WARRANTIES, AND THE IMPLIED WARRANTY OF MERCHANTABILITY IS LIMITED TO ONE YEAR FROM PURCHASE. THIS WARRANTY DOES NOT COVER THE COST OF INSTALLATION, REMOVAL OR REINSTALLATION, OR DAMAGE RESULTING FROM MISUSE, ABUSE, OR DAMAGE FROM IMPROPER WIRING OR INSTALLATION. THIS WARRANTY DOES NOT COVER INCIDENTAL OR CONSEQUENTIAL DAMAGES. BESTTEN'S LIABILITY ON ANY CLAIM FOR DAMAGES ARISING OUT OF OR IN CONNECTION WITH THE MANUFACTURE, SALE, INSTALLATION, DELIVERY, OR USE OF THE UNIT SHALL NEVER EXCEED THE PURCHASE PRICE OF THE UNIT.

This warranty gives you specific legal rights, and you may have other rights which vary from state to state. Some states do not allow the exclusion or limitation of incidental or consequential damages, or limitation on how long an implied warranty may last, so the above limitations may not apply to you.

For any enquiry, please send email to:
support@ibestten.com
V 2.0 2026.6

