




EMEET OfficeCore Luna Plus

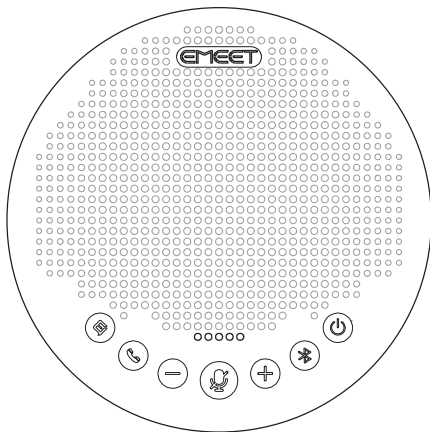

English | 日本語 | Deutsch | Français | Español | Italiano | Русский | 繁體中文 | 简体中文
User Manual/产品说明书

CONTENTS

English.....	01
日本語.....	08
Deutsch.....	15
Français.....	22
Español.....	29
Italiano.....	36
Русский.....	43
繁體中文.....	50
简体中文.....	57

Luna Plus Kit




 		
× 1		× 1
		
× 1	× 1	× 1
		
		× 1

Luna Plus



			
× 1			
			
× 1	× 1	× 1	× 1

Overview

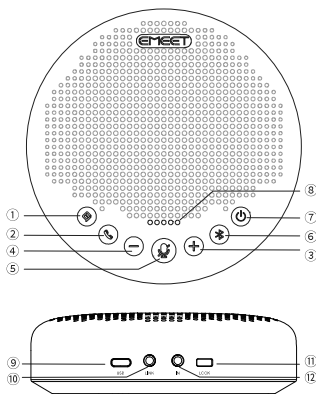

- ① AI noise reduction on/off
- ② Answer/End phone call
- ③ Volume up
- ④ Volume down
- ⑤ Mute/Unmute microphone
- ⑥ Bluetooth button
- ⑦ Power button
- ⑧ Status indicator
- ⑨ USB port
- ⑩ Daisy Chain port
- ⑪ LOCK port
- ⑫ Port for connecting expansion microphone

Button Controls

Diagram	Action	Description
	Press	AI noise reduction on/off
	Press and hold	Power on/off
	In power-on state, press	Display battery level

	Press	Turn up/down the volume by a single grid
	Press and hold	Turn up/down the volume continuously
	Press	Answer/End phone call
	Incoming call, press and hold	Reject phone call
	Press	MIC mute/unmute
	Press and hold	Search Bluetooth
	Press	Bluetooth closed
		Bluetooth reconnected

Status LED

Status	Color	Display
USB connection	Steady green	
Search Bluetooth	Flash blue	
The Bluetooth connection is established.	Steady blue	
The Bluetooth is closed/being reconnected.	Steady white	
Daisy Chain	Steady ice blue	
MIC muted	Steady red	
Caller display	Flash green	
Battery low display	Flash red	

Operating Instructions

1 Power On/Off

- Manual on/off

Press and hold the power button for 2 seconds to power on or power off the product.

- Auto on/off

- Connect the product to a PC via a USB cable to power it on or off automatically.


- The product will power off automatically if no connection or operation is performed in 1 hour.

Note: The auto-off duration can be modified in EMEETLINK software.

2 Connection

- USB connection

Connect the product to a PC via a USB to power it on automatically. Plug-and-play is supported

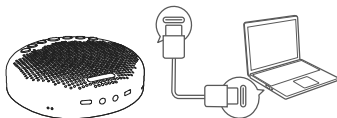

- Bluetooth connection


The product can be connected to mobile devices such as PCs or mobile phones through Bluetooth pairing after it's powered on.

Note: When the product is powered on, it will reconnect to the last connected device via Bluetooth (if enabled on the device) The product cannot be found if its Bluetooth is closed.



- USB Dongle connection

When the dongle is connected to the computer and the product is powered on, it will automatically connect wirelessly to the dongle without manual pairing.

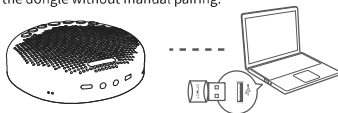

3 Battery Display

- Check battery level

The status indicators will indicate the battery level if the power button is short pressed when powered on.

Battery	Color	Display
0%-20%	Green	● ○ ○ ○ ○
20%-40%	Green	● ● ○ ○ ○
40%-60%	Green	● ● ● ○ ○
60%-80%	Green	● ● ● ● ○
80%-100%	Green	● ● ● ● ●

- Low battery

In power-on state, the 5 lights of the status indicators will flash red for 5 seconds and then go out.

- Charging

Status	Color	Display
Charging in power-off state	Yellow-green	○ ○ ●* ○ ○
Fully charged in power-off state	Yellow-green	○ ○ ● ○ ○


4 Volume Display

20%	● ○ ○ ○ ○
40%	● ● ○ ○ ○
60%	● ● ● ○ ○
80%	● ● ● ● ○
100%	● ● ● ● ●


5 Daisy Chain Cable

- Daisy Chain can be carried out by connecting the ports of two products using a Daisy Chain cable.
- The Status indicator turns ice blue when Daisy Chain is connected.

Note: Please use the EMEET dedicated Daisy Chain cable to connect the devices. EMEET Daisy Chain cables must be purchased separately.



5-10 persons can be connected
without the Daisy Chain connection.




10-18 persons can be connected
with the Daisy Chain connection.

6 Connecting Expansion Microphone

- The expansion microphone can pick up sound after its 3.5mm audio port is connected to the port for connecting such a microphone on the product.

Note : Please use the EMEET dedicated expansion microphone to connect the devices.




5-10 persons can be connected before the expansion microphone is connected.



8-14 persons can be connected after the expansion microphone is connected.



7 Lock Port Setting

- The product can be locked through the LOCK port to prevent theft.
- Note: The LOCK port is of a Kensington type which requires the user to buy a lock otherwise.



8 Download Application

- Visit www.emeet.com to download the EMEETLINK PC desktop app for software updates.
- Note: The device can operate normally even if EMEETLINK is not downloaded.

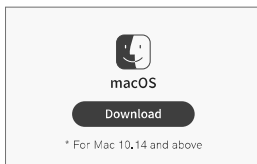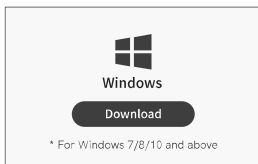

Product Parameters

Note: In case of any changes in the specifications, official website information shall prevail.

Charging input	5V $\pm$ 1A
Output rating	5W
Charging time	3-4 hours
Speaker frequency range	20Hz-20KHz
Bluetooth version	V5.3
Bluetooth range	20m (in an open environment)
Product size	130*130*36.5mm

Contact Us

Official website: www.emeet.com