


RECON PLUS HL1000

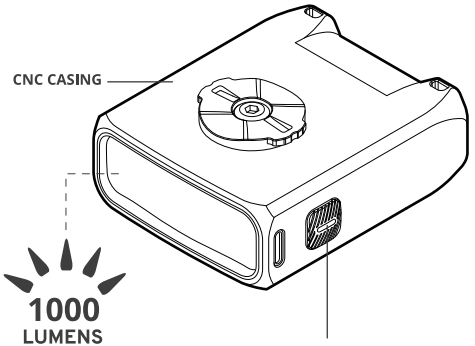


1000 LUMENS


HOLD FOR 1 SEC TO TURN ON

L: BATTERY LEVEL INDICATOR

- WARNING**
- This light emits an extremely powerful beam equivalent to auto-mob-ile headlight so it may cause a hazardous situation depending on the beam angle used.
 - Be sure to direct the light beam downward so the driver approaching does not get dazzled.
 - Do not use high mode on public roads.
 - Before your trip, please make sure the light is firmly mounted to the bracket, it lights up, and the light is not blocked by baggage, etc.
 - Do not stare at the light when it is illuminating. Otherwise it may damage your eyesight.
 - Do not place it within children's reach.
 - In preparation for unexpected battery shutoff, we recommend you carry a spare light.
 - This product is water-resistant under normal daily use and can be used in the rain. However, do not intentionally submerge it in water.
 - If the light unit or parts become dirty with mud, etc., clean with a soft cloth which is moistened with mild soap. Never apply paint thinner, benzene or alcohol; damage will result.
 - This unit is shipped with a small charge to check the light. Be sure to charge it before use, according to the instructions "HOW TO CHARGE".

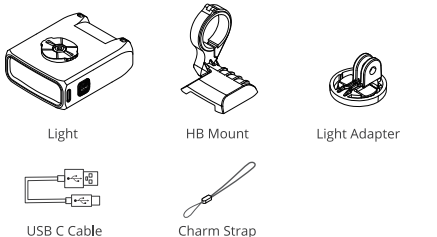

SWITCHING THE LIGHTING MODE

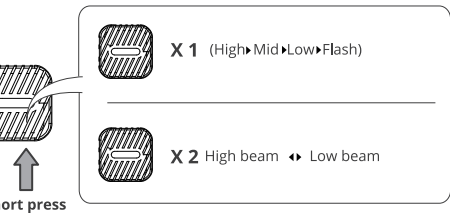

RUNTIME

ANSI	LOW BEAM(H)	LOW BEAM(M)	LOW BEAM(L)	DAY FLASH	FULL BEAM
	600 LUMENS	400 LUMENS	200 LUMENS	400 LUMENS	1000 LUMENS
	2.5 hr	5 hr	10 hr	24 hr	1.5 hr

BATTERY INDICATOR




HOW TO CHARGE

Always charge the product before use.



PAIRING

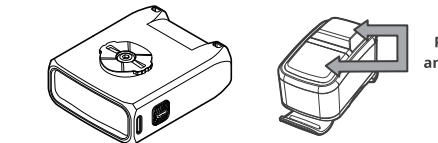

- Turn on the bike lights. Press both buttons on the **Remote control** simultaneously for 5 seconds to initiate pairing mode.
- The pairing is successful when the remote control's blue light flashes, followed by the green light turning on for 3 seconds before turning off.
- During the initial pairing, ensure there are no nearby lights from the same RECON PLUS series.

Pairing with the Electronic Shifting System

- Press and hold the button for approximately 10 seconds until the blue indicator lights up, then release to enter pairing mode.


Indicator color sequence: Green → Blue

- Press and hold the button on the rear derailleur until the blue indicator flashes.
- Release the button to enter pairing mode. Once pairing is successful, the blue indicator will stay on for 3 seconds and then turn off.

Unpairing


Press the button 5 times consecutively. The blue indicator will flash for 3 seconds, indicating that unpairing is complete.

INSTALLATION

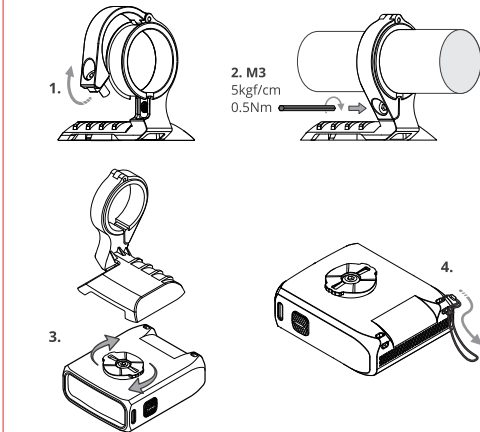

HOW TO MOUNT TO A HELMET /COMPUTER EXTENSION MOUNT

The mounting buckle and/or thumb screw, depending on the mount you are using.

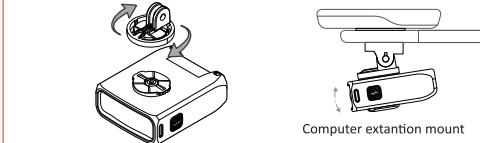

FCC Statement
This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
RF Exposure Information
Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.
This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
•Reorient or relocate the receiving antenna.
•Increase the separation between the equipment and receiver.
•Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
•Consult the dealer or an experienced radio/TV technician for help.
The device has been evaluated to meet general RF exposure requirement. This equipment should be installed and operated with minimum distance 0mm between the radiator & your

ISED Statement
English: This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:
(1) This device may not cause interference.
(2) This device must accept any interference, including interference that may cause undesired operation of the device.
The digital apparatus complies with Canadian CAN ICES-3 (B)/NMB-3(B).
French: Cet appareil contient des émetteurs/récepteurs exempts de licence qui sont conformes aux RSS exemptés de licence d'Innovation, Sciences et Développement économique Canada. L'exploitation est soumise aux deux conditions suivantes :
(1) Cet appareil ne doit pas provoquer d'interférences.
(2) Cet appareil doit accepter toute interférence, y compris les interférences susceptibles de provoquer un fonctionnement indésirable de l'appareil.
L'appareil numérique du ciem conforme canadien peut - 3 (b) / nmb - 3 (b).
This device meets the exemption from the routine evaluation limits in section 2.5 of RSS 102 and compliance with RSS 102 RF exposure, users can obtain Canadian information on RF exposure and compliance.
cet appareil est conforme à l'exemption des limites d'évaluation courante dans la section 2.5 du cnr - 102 et conformité avec rrs 102 de l'exposition aux rf, les utilisateurs peuvent obtenir des données canadiennes sur l'exposition aux champs rf et la conformité.
This equipment complies with Canada radiation exposure limits set forth for an uncontrolled environment.
Cet équipement est conforme aux limites d'exposition aux rayonnements du Canada établies pour un environnement non contrôlé.
RF Exposure Statement
The device has been evaluated to meet general RF exposure requirement. This equipment should be installed and operated with minimum distance 0mm between the radiator & your body.
L'appareil a été évalué pour répondre aux exigences générales d'exposition aux RF. Cet équipement doit être installé et utilisé avec une distance minimale de 0 mm entre le radiateur et votre corps.