

# Floor Troughs


## INSTALLATION INSTRUCTIONS

### CAUTION


INSPECT CONTENTS IMMEDIATELY AND FILE CLAIM WITH DELIVERING CARRIER FOR ANY DAMAGE.  
**SAVE YOUR BOX AND ALL PACKING MATERIALS.**  
YOU ARE RESPONSIBLE FOR DAMAGE TO YOUR UNIT IF RETURNED IMPROPERLY PACKED.



### Plumbing Rough-ins

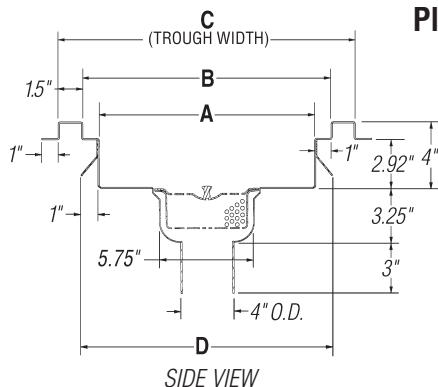

SIDE VIEW

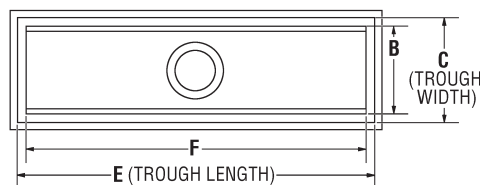

TOP VIEW


(see chart below for dimensions A through F)

| 12" (305mm)-WIDE TROUGHS   |  | 15" (381mm)-WIDE TROUGHS    |  | 18" (457mm)-WIDE TROUGHS    |  | 24" (610mm)-WIDE TROUGHS    |  | TROUGH LENGTHS |             |
|----------------------------|--|-----------------------------|--|-----------------------------|--|-----------------------------|--|----------------|-------------|
| dimension A: 7" (178mm)    |  | dimension A: 10" (254mm)    |  | dimension A: 13" (330mm)    |  | dimension A: 19" (483mm)    |  | dimension E    | dimension F |
| dimension B: 9" (229mm)    |  | dimension B: 12" (305mm)    |  | dimension B: 15" (381mm)    |  | dimension B: 21" (533mm)    |  |                |             |
| dimension C: 12" (305mm)   |  | dimension C: 15" (381mm)    |  | dimension C: 18" (457mm)    |  | dimension C: 24" (610mm)    |  | in.            | mm          |
| dimension D: 9.25" (232mm) |  | dimension D: 12.25" (311mm) |  | dimension D: 15.25" (387mm) |  | dimension D: 21.25" (540mm) |  |                |             |
| model #                    |  | model #                     |  | model #                     |  | model #                     |  |                |             |
| FT-1218-FG                 |  | n/a                         |  | n/a                         |  | n/a                         |  | 18"            | 457         |
| FT-1224-FG                 |  | FT-1524-FG                  |  | FT-1824-FG                  |  | FT-2424-FG                  |  | 24"            | 610         |
| FT-1230-FG                 |  | FT-1530-FG                  |  | FT-1830-FG                  |  | FT-2430-FG                  |  | 30"            | 762         |
| FT-1236-FG                 |  | FT-1536-FG                  |  | FT-1836-FG                  |  | FT-2436-FG                  |  | 36"            | 914         |
| FT-1248-FG                 |  | FT-1548-FG                  |  | FT-1848-FG                  |  | FT-2448-FG                  |  | 48"            | 1219        |
| FT-1260-FG                 |  | FT-1560-FG                  |  | FT-1860-FG                  |  | FT-2460-FG                  |  | 60"            | 1524        |
| FT-1272-FG                 |  | FT-1572-FG                  |  | FT-1872-FG                  |  | FT-2472-FG                  |  | 72"            | 1829        |
| FT-1284-FG                 |  | FT-1584-FG                  |  | FT-1884-FG                  |  | FT-2484-FG                  |  | 84"            | 2134        |
| FT-1296-FG                 |  | FT-1596-FG                  |  | FT-1896-FG                  |  | FT-2496-FG                  |  | 96"            | 2438        |
| FT-12120-FG                |  | FT-15120-FG                 |  | FT-18120-FG                 |  | FT-24120-FG                 |  | 120"           | 3048        |
|                            |  |                             |  |                             |  |                             |  | 117"           | 2972        |

The above chart indicates troughs with fiberglass grating. For troughs with ADA-approved wide "T" Bar fiberglass grating, add suffix **-ADA**. Example: FT1224-FG-**ADA**  
For troughs with stainless steel grating, replace suffix **-FG** with **-SG**. Example: FT1224-**SG**

- Size of rough-in hole for trough should be as follows:  
Width = "Dimension D"  
Length = "Dimension E"  
Depth = 4 1/4"
- Size of rough-in hole for drain should be 5 7/8" diameter.  
Depth, to accommodate plumbing, may vary.
- Place trough in hole.
- Lay finished floor so that it overlaps outer flange on all four sides of trough.
- Lay grating inside trough accordingly.

(End)

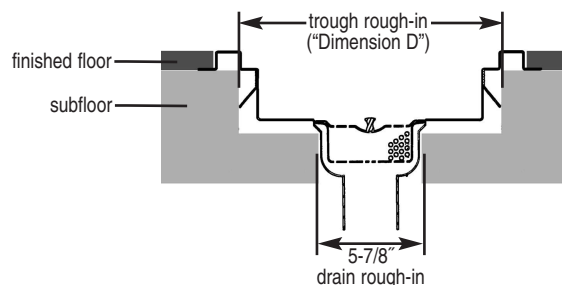

EG10094 Revised 01/15

# Anti-Splash Floor Troughs

## INSTALLATION INSTRUCTIONS

### CAUTION


INSPECT CONTENTS IMMEDIATELY AND FILE CLAIM WITH DELIVERING CARRIER FOR ANY DAMAGE.

**SAVE YOUR BOX AND ALL PACKING MATERIALS.**


YOU ARE RESPONSIBLE FOR DAMAGE TO YOUR UNIT IF RETURNED IMPROPERLY PACKED.



### Plumbing Rough-ins

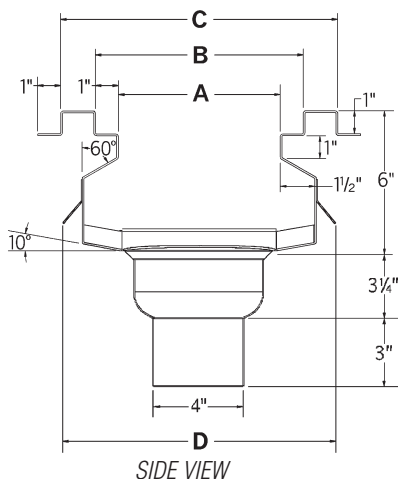

SIDE VIEW

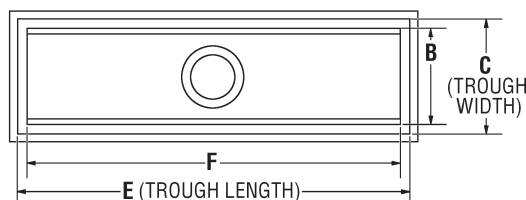

TOP VIEW

(see chart below for dimensions A through F)

| 12" (305mm)-WIDE TROUGHS    | 15" (381mm)-WIDE TROUGHS    | 18" (457mm)-WIDE TROUGHS    | 24" (610mm)-WIDE TROUGHS    | TROUGH LENGTHS |             |
|-----------------------------|-----------------------------|-----------------------------|-----------------------------|----------------|-------------|
| dimension A: 7" (178mm)     | dimension A: 10" (254mm)    | dimension A: 13" (330mm)    | dimension A: 19" (483mm)    | dimension E    | dimension F |
| dimension B: 9" (229mm)     | dimension B: 12" (305mm)    | dimension B: 15" (381mm)    | dimension B: 21" (533mm)    | in.            | in.         |
| dimension C: 12" (305mm)    | dimension C: 15" (381mm)    | dimension C: 18" (457mm)    | dimension C: 24" (610mm)    | mm             | mm          |
| dimension D: 11.25" (286mm) | dimension D: 14.25" (362mm) | dimension D: 17.25" (438mm) | dimension D: 23.25" (591mm) |                |             |
| model #                     | model #                     | model #                     | model #                     |                |             |
| ASFT-1218-FG                | n/a                         | n/a                         | n/a                         | 18"            | 15"         |
| ASFT-1224-FG                | ASFT-1524-FG                | ASFT-1824-FG                | ASFT-2424-FG                | 457            | 381         |
| ASFT-1230-FG                | ASFT-1530-FG                | ASFT-1830-FG                | ASFT-2430-FG                | 24"            | 21"         |
| ASFT-1236-FG                | ASFT-1536-FG                | ASFT-1836-FG                | ASFT-2436-FG                | 610            | 533         |
| ASFT-1248-FG                | ASFT-1548-FG                | ASFT-1848-FG                | ASFT-2448-FG                | 30"            | 27"         |
| ASFT-1260-FG                | ASFT-1560-FG                | ASFT-1860-FG                | ASFT-2460-FG                | 762            | 686         |
| ASFT-1272-FG                | ASFT-1572-FG                | ASFT-1872-FG                | ASFT-2472-FG                | 36"            | 33"         |
| ASFT-1284-FG                | ASFT-1584-FG                | ASFT-1884-FG                | ASFT-2484-FG                | 914            | 838         |
| ASFT-1296-FG                | ASFT-1596-FG                | ASFT-1896-FG                | ASFT-2496-FG                | 48"            | 45"         |
| ASFT-12120-FG               | ASFT-15120-FG               | ASFT-18120-FG               | ASFT-24120-FG               | 1219           | 1143        |
|                             |                             |                             |                             | 60"            | 57"         |
|                             |                             |                             |                             | 1524           | 1448        |
|                             |                             |                             |                             | 72"            | 69"         |
|                             |                             |                             |                             | 1829           | 1753        |
|                             |                             |                             |                             | 84"            | 81"         |
|                             |                             |                             |                             | 2134           | 2057        |
|                             |                             |                             |                             | 96"            | 93"         |
|                             |                             |                             |                             | 2438           | 2362        |
|                             |                             |                             |                             | 120"           | 117"        |
|                             |                             |                             |                             | 3048           | 2972        |

The above chart indicates troughs with fiberglass grating. For troughs with ADA-approved wide "T" Bar fiberglass grating, add suffix **"-ADA"**. Example: ASFT1224-FG-ADA

For troughs with stainless steel grating, replace suffix **"-FG"** with **"-SG"**. Example: ASFT1224-SG

- Size of rough-in hole for trough should be as follows:  
Width = "Dimension D"  
Length = "Dimension E"  
Depth = 6 1/4"
- Size of rough-in hole for drain should be 5 7/8" diameter.  
Depth, to accommodate plumbing, may vary.
- Place trough in hole.
- Lay finished floor so that it overlaps outer flange on all four sides of trough.
- Lay grating inside trough accordingly.

