
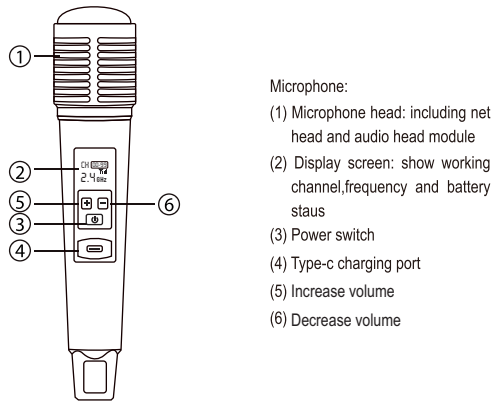


2026-5-8, 修改发确认~~~
单张双面，单色印刷

210mm

WIRELESS MICROPHONE USER MANUAL

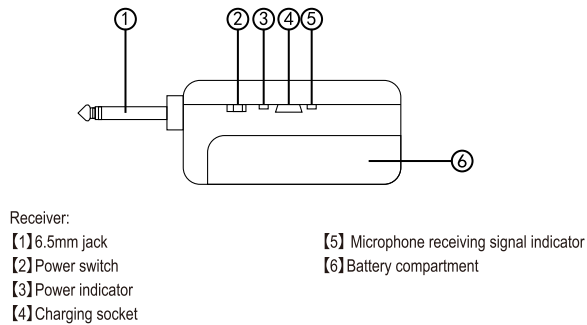


Product features	
● Carrier frequency band: adjustable ultrahigh frequency	
● Digital audio transmission technology	
● Unique digital ID code pilot technology, 32-bit ID code, completely solve the same frequency crosstalk phenomenon	
● Ultra-low audio latency.	
● Audio sampling mode: 48KHz.	
● Frequency range: 40Hz~18KHZ.	
● Receive automatic verification	
● Open environment theoretical transmission distance:30-50meters	
Specification of hand-held microphone	
Capsule	Dynamic
polar pattern	cardioid
frequency range	2402-2480MHz
radio frequency bandwidth	60 MHz
frequency response	40Hz - 18KHz
dynamic range	96db
harmonic radiation	< - 50 DBC
The degree of distortion of the feeding mode	< 0.1%
	14500 lithium battery

Receiver specification	
frequency range	2402-2480MHz
radio frequency bandwidth	60MHz
The signal to noise ratio	≥90dB
receiving sensitivity	-95~71dBm
frequency response	40Hz - 18KHz
The degree of distortion of	0.05%
dynamic range	96dB
receiving delay	2.5ms
the feeding mode	14500 lithium battery

Basic operating instructions:

Microphone:

1. Unscrew the battery compartment (5), and insert a 18650 lithium battery (3.7V), paying attention that the positive and negative polarity cannot be reversed.
2. Short press the microphone power switch (3) to turn on mic, the display (2) will turns bright, showing the working frequency, channel and battery real-time power; long press the switch to turn off mic.

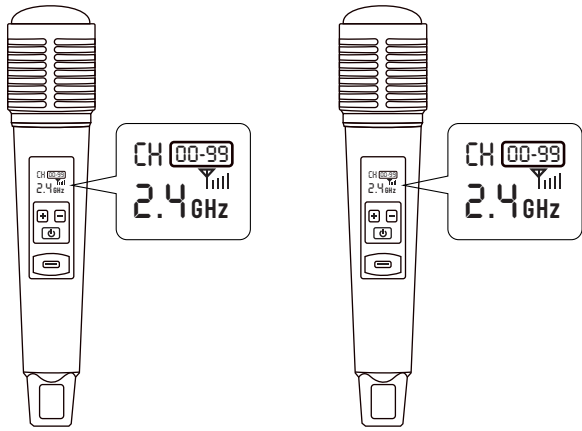

Receiver:

1. Open the battery compartment [7] , insert a lithium battery, and note that the positive and negative polarities cannot be reversed
2. Turn the receiver switch [2] key to the "ON" position, when the power indicator [3] turns green,the receiver will work normally
3. Receiver signal indicator [5] turns green indicate the receiver has successfully connected to the microphone of the CHA channel, turns green indicates the

microphone of the CHB channel has been successfully connected, turns green at the same time indicates the receiver has been connected to two microphones, they can be used at the same time.

4. When the receiver's battery under low power status,the green light [3] will slightly dim;When charging,the power indicator light [3] will turns and keep red,after fully charged,the red light will turn off, [3] not light.

Common troubleshooting:

The microphone cannot be turned on	Please replace a new 14500 (3.7V) lithium batteries and check the positive and negative directions of the batteries to make sure they are in the correct direction.
The microphone is automatically turned off	Please replace a new 14500 (3.7V) lithium batteries
The receiver cannot be turned on	Please charge the receiver and check the positive and negative direction of the battery. If the problem cannot be solved, please replace a new 14500 (3.7V) lithium battery
The receiver cannot be charged	Please below methods: 1. Check the positive and negative direction of the battery to ensure that the direction is correct. 2. Replace a charging cable with the same interface for charging. 3. Replace with a new 14500 (3.7V) lithium battery.
The receiver and microphone have sufficient power, but the microphone has no sound, or only one microphone has sound	Please check the channels of the two microphones from the microphone display, make sure that the two microphones are on the CHA and CHB channels respectively, the two microphones cannot be set on the same channel.
Microphone whistling	The microphone is too close to the speaker or the volume is adjusted too high, please turn down the volume of speaker or keep away from speaker

Note:
1. This receiver has a 6.5mm plug and a 3.5mm converter plug, which is suitable for various devices.
2. If there are any problems during using this mics set, please contact us via our customer service email (you can find out the email address on the customer service card that in the package), we will try our best to provide you the best service

140mm

FCC STATEMENT

1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) This device must accept any interference received, including interference that may cause undesired operation.
2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
Reorient or relocate the receiving antenna.
Increase the separation between the equipment and receiver.
Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
Consult the dealer or an experienced radio/TV technician for help.

RF warning statement:
The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

面

底

