

# ASSEMBLY AND INSTALLATION INSTRUCTIONS

CF35417

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

**NOTE:** Before installing, consult local electrical codes for wiring and grounding requirements.

## Installation Steps

### For Semi-Flush

1. Attach two screws to the mounting strap, and then secure with two lock nuts. **(You can adjust the length of the screws if necessary.)**
2. Attach the mounting strap to the ceiling box by using two mounting screws.
3. Screw the nipple into the coupling on the socket base, and then secure with a hex nut. **(You can adjust the length of the nipple if necessary.)**
4. Attach the tube, cap-1 and cap-2 to the coupling by inserting the nipple, and then secure with a hex nut.
5. Cut the redundant wires if necessary, and make wire connections with wire nuts:
  - Connect the smooth wire (marked) from fixture to the black wire from power source.
  - Connect the ridged wire (unmarked) from fixture to the white wire from power source.
  - Attach the grounding wire to the mounting strap with the green grounding screw. Then connect it to the house grounding wire with the wire nut.
 Carefully tuck wires back into the ceiling box.
6. Unscrew two bolt nuts from the canopy-1, attach the canopy-1 to the mounting strap, and then secure with the bolt nuts.
7. Install bulbs. **(Please do not exceed the maximum capacity that is recommended on the package.)**
8. Attach the glass shade to the fixture, secure with a rubber pad, metal pad and hex nut. Then attach the cap-3 upward to the glass shade. and then secure with the finial.
9. Turn on the power at fuse or circuit box.

### For Pendant:(See Fig.1)

1. Attach the nipple-1 to the mounting strap, and then secure with a washer and hex nut.
2. Attach the mounting strap to the ceiling box by using two mounting screws.
3. Follow steps 3~4 as For Semi-Flush.
4. Thread the fixture wire and grounding wire through the loop, and then secure the loop onto the nipple-2.
5. Choose the certain length of the chain that you need, and weave the fixture wire and the grounding wire through the chain links. Then connect one end of the chain with the loop by using the loop lock.
6. Secure the top loop to the nipple-1.
7. Thread the fixture wire and grounding wire through the collar, top loop, canopy-2, nipple-1 and mounting strap in order.
8. Connect the link on the other end of the chain with the top loop by using the loop lock.
9. Follow step 5 as For Semi-Flush.
10. Attach the canopy-2 to the mounting strap by inserting the top loop, and then secure with the collar.
11. Follow steps 7~9 as For Semi-Flush.

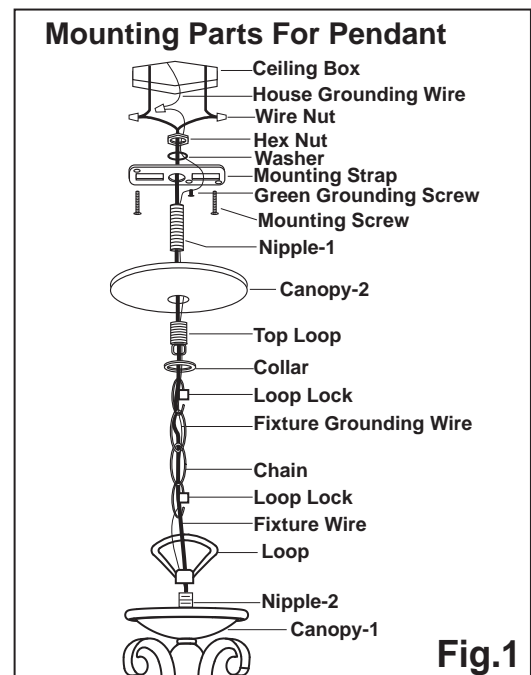
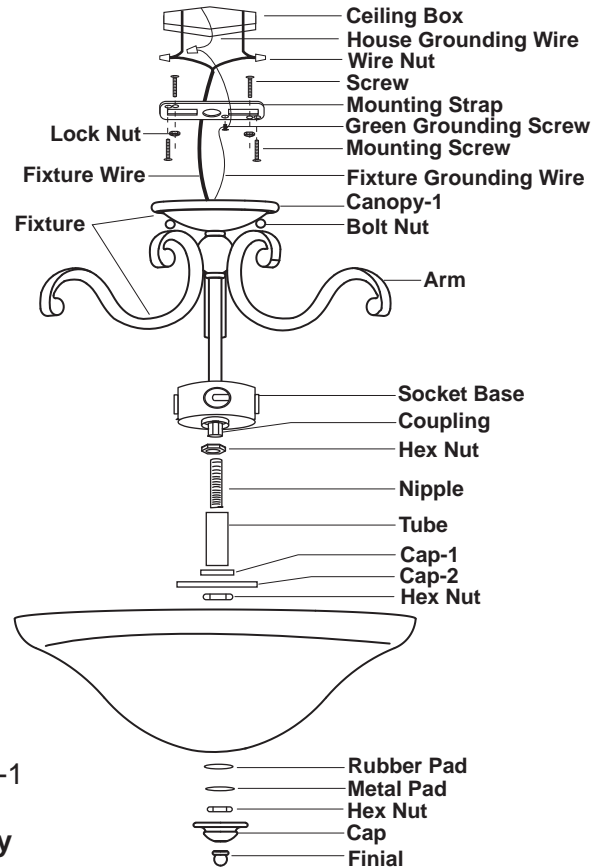


Fig.1