

QUICK START GUIDE



Sol 30W Series



For more information, please visit
www.harlowe.com or scan:





HARLOWE.COM

AEC LIGHTING SOLUTIONS CO., LTD
2548 Bao'an Highway, Jiading District, Shanghai 201801, China

ENG

Features

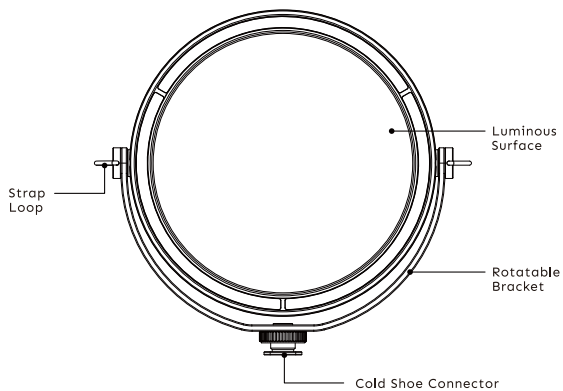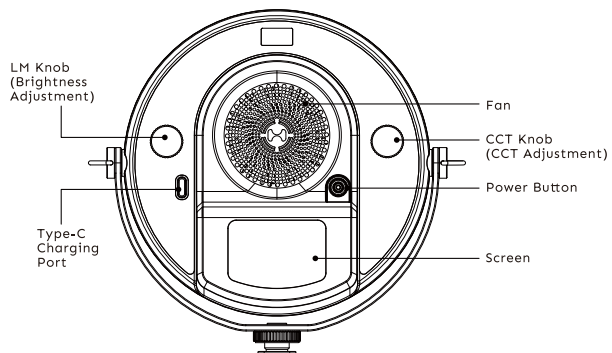

Operating Instructions

1. Power On/Off

- 1) Power On: Short press the Power Button, then rotate the CCT Knob clockwise to turn on the device.
- 2) Power Off: Short press the Power Button to turn off the device.

2. Brightness Adjustment

- 1) Rotate the LM Knob to continuously adjust the brightness from 0% to 100%.
- 2) Short press the LM Knob to quickly cycle through the preset brightness levels.

3. CCT Adjustment

- 1) Rotate the CCT Knob to continuously adjust the color temperature within the following ranges:
 - Bi-Color Version: 2700K to 6500K
 - RGBCW Version: 1700K to 10000K
- 2) Short press the CCT Knob to cycle through the preset color temperature levels.

4. Menu Operation

- 1) Long press the Power Button for approximately 1.5 seconds to enter the main menu.
- 2) Rotate the CCT Knob to select the desired menu item.
- 3) Short press the CCT Knob to enter the corresponding submenu.
- 4) Within a submenu, rotate the CCT Knob to select the desired option.
- 5) Long press the Power Button again for approximately 1.5 seconds to return to the lighting control screen.

5. Quick Screen Lock

- 1) Short press the CCT Knob and LM Knob simultaneously to lock the screen. When the screen is locked, CCT adjustment, brightness adjustment, and menu operations are disabled.
- 2) To unlock the screen, short press the CCT Knob and LM Knob simultaneously again.

RGBCW Mode (Applicable to the Spectra Version only)

1. Mode Switching

- 1) Long press the CCT Knob for approximately 1.5 seconds to switch from Bi-Color Mode to RGBCW Mode. Long press the CCT Knob again to switch back to Bi-Color Mode.
- 2) In RGBCW Mode, short press the CCT Knob to switch between Saturation Adjustment and Hue Adjustment.

2. Brightness Adjustment

- 1) Rotate the LM Knob to continuously adjust the brightness from 0% to 100%.
- 2) Short press the LM Knob to cycle through the preset brightness levels.

3. Saturation and Hue Adjustment

- 1) Select Saturation Adjustment, then rotate the CCT Knob to adjust the saturation from 0 to 100.
- 2) Select Hue Adjustment, then rotate the CCT Knob to adjust the hue from 0° to 360°.

4. Life Modes

Life Mode includes two preset lighting effects: Relax and Sleep, designed to create a comfortable ambient lighting environment.

- 1) Long press the LM Knob for approximately 1.5 seconds to enter Life Mode.
- 2) Short press or rotate the CCT Knob to switch between the Relax and Sleep lighting effects.
- 3) Long press the LM Knob again to exit Life Mode and return to Bi-Color Mode or RGBCW Mode.



WARNINGS

- Please thoroughly read the manual prior to operating the product and operate in strict accordance with the manual.
- Don't disassemble the product by yourself. If the product requires repair, contact our maintenance personnel.
- Product failures caused by unauthorized disassembly are not covered by warranty, and will be chargeable.
- The product is designed to be actively cooled by fans. Don't block the fan ducts of the product during operation.
- Don't touch the heat generating parts of the product during operation to avoid scalding injury.
- The power must be switched off during set-up and break down of the product.
- Don't submerge the product in water or other liquid/s to avoid safety risk and product failure.
- Allow the product to properly cool after each use before storage.
- Only use the originally supplied accessories to avoid product failure/s.
- Only use the supplied charging adapter and power cable to avoid damage to the product.

Product Specifications

Sol 30W & Harlowe X Adele Chan Sol 30W Spectra


	Sol 30W	Harlowe X Adele Chan Sol 30W Spectra
Power	30W	30W
Luminous Flux (6500K)	1600 lm	1600 lm
Luminous Flux (2700K)	1300 lm	1300 lm
Luminous Flux (1700K)	/	1000 lm
Luminous Flux (10000K)	/	1000 lm
Radiant Power R	/	1200 mW
Radiant Power G	/	1500 mW
Radiant Power B	/	5000 mW
Input	AC 100-240V, 50~60Hz DC 5-20V	AC 100-240V, 50~60Hz DC 5-20V
Battery	7.3V 4000mAh, 29.2Wh	7.3V 4000mAh, 29.2Wh
CRI	96	96
TLCI	96	96
CCT	2700-6500K	1700-10000K
RGBCW	/	36000 colors Hue: 0-360° Saturation: 0-100% Intensity: 0-100%
Dimming	0-100%	0-100%
Wireless Method	Bluetooth	Bluetooth
Wireless Operating Range	20m / 65.6ft	20m / 65.6ft
Noise	18dB@1m	18dB@1m
Operating Temperature	-10~40°C / 14~104°F	-10~40°C / 14~104°F
Dimension	167.4 x 38.8 x 168.9 mm 6.59 x 1.53 x 6.65 in	167.4 x 38.8 x 168.9 mm 6.59 x 1.53 x 6.65 in
Net Weight	Approx. 575 g / 1.27 lb	Approx. 575 g / 1.27 lb

App Download

You can download the Harlowe app in the (Apple) App Store and Google Play store by scanning the following QR code.

Q Harlowe

Q www.harlowe.com

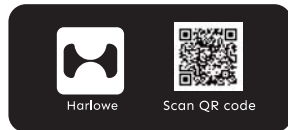

Warranty Card

Product No.	
Product name	
Purchase date	
User name	
User telephone	
User address	
Dealer stamp	

AEC LIGHTING SOLUTIONS CO., LTD.

INSPECTION: PASS

Add: 2548 Bao'an Highway, Jiading District, Shanghai 201801, China

Warranty Terms

We provide a two-year warranty period for the original buyer of the product. For the detailed warranty scope, please log in our website.

Important notes:

- Please retain your original purchase invoice and warranty card and ensure that the complete supplier information is on the invoice, including the purchase date and product serial number, which will be needed when making a claim against the warranty.

The warranty does not cover:

- Damage caused by improper use, false wiring, incompatible, poor quality or mis-adjusted external devices.
- Damage to the appearance of the product from mishandling or abuse.
- Exposure to rain or water.
- Damage caused by transportation. Please contact your dealer to issue a claim.

The warranty will be invalid if:

- The product serial number has been torn off or can't be identified.
- The product has been repaired or modified by unauthorized persons.

FCC warning statements:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment. This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The device has been evaluated to meet general RF exposure requirement.