

Parameters

Audio input/output: 2 groups of stereo 1/2, 1 group of I/O
Interface type: banana female
Working mode: 2-IN-1-OUT / 1-IN-2-OUT
Amplifier type supported: all kinds of type (BTL /Class A /Class AB /
Class B / Class D digital amp / tube amp etc.)
Max. through power of each channel: 200W (in actual)
Amplifier no-load protection: support
Remote control: support
Settings saved after shutdown: support
Mute: support
Working voltage: DC 5V
Power interface: Type-C
Dimensions(W*D*H): 242*108*33mm / 9.53*4.25*1.30in
Net weight: 720g / 1.59lb
Packing List: 1*SP102 Pro Switcher Box 1*USB Cable
1*Remote Control(without 2*AAA1.5V batteries)
1*Manual

Contact information

- Website: www.doukaudio.com
- Email: nobsound@doukaudio.com
- WeChat/Whatsapp: +86-17704028602
- Address: Room 1329, Wang Cheng Building, Long Guan East Road,
Long Hua District, Shen Zhen, Guang Dong, China, 518000

— 3 —



Introduction

SP102-PRO is a 2-way amplifier/speaker switcher, convenient to compare the sound quality of 2 pair of different speakers or 2PCS power amplifiers. Each channel can pass through power up to 200W, fully isolated design for all channels, built-in protective loads for channels 1&2, suitable for all types of amplifiers. Design with LED display screen to show the working status, and with remote control. Proper size with simple appearance, fashionable and durable, convenient for use in most situations.

Warm tips

- Channel 1/2 can work at the same time. It is recommended to use this function in 1-IN-2-OUT mode, that means connect one amplifier and two pairs of speakers. Amplifiers may be damaged if use Channel 1/2 input at the same time.
- In OFF state, default disconnect 1&2 terminals from I/O interface, it is equivalent to mute. And 1 and 2 will be connected to the built-in loads at the same time.
- Without DC 5V adapter, please prepare it by yourself.
- For safer and faster delivery, the remote control without batteries (2*AAA), please prepare it by yourself.




Step for use

- Connect the power supply to SP102-Pro, plug the power cable into the socket.
- According to the connection:
 - 1-IN-2-OUT, connect the amplifier to the I/O input, then connect the speakers to 1/2.

— 1 —

- 2-IN-1-OUT, connect the speaker to the I/O input, then connect the amplifiers to 1/2;
- Long press the front panel button for 3s or use the remote control to power on.
- Single click the button or use remote control to select channel, and the corresponding LED indicator will light on.
- After using it, long press the button or use remote control to power off, and then disconnect the power supply.

Front and back panel

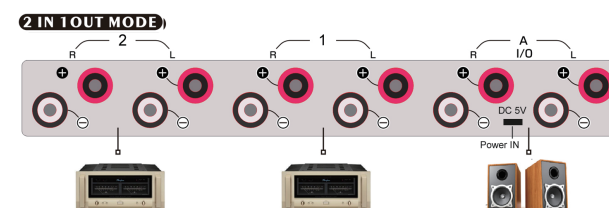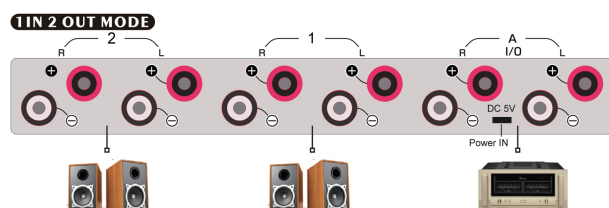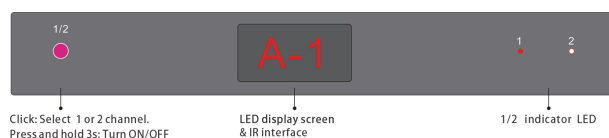

— 2 —