


INSTALLATION INSTRUCTIONS

* Optional:
Damper can be
placed between
any 2 duct
sections.

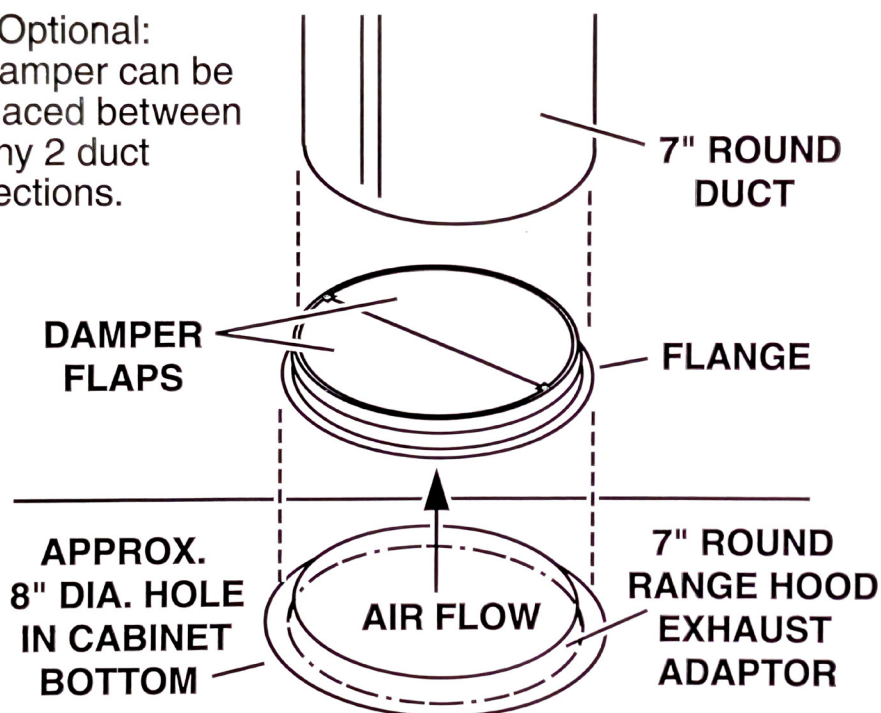

**Fits SHN3033MS
Range Hood.**

1. Place damper over discharge collar of 7" round ducted hood.
2. Slide 7" round duct over damper and tape duct and damper flange to top of hood.*
3. Make sure damper flaps open freely during hood operation.

SHARP®

SHARP ELECTRONICS CORPORATION • 100 Paragon Drive • Montvale, New Jersey 07645 • USA
1-800-BE-SHARP (1-800-237-4277)