



# ASSEMBLY AND INSTALLATION INSTRUCTIONS

C0239

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

**NOTE:** 1. Before installing, consult local electrical codes for wiring and grounding requirements.  
2. READ AND SAVE THESE INSTRUCTIONS.

## Hardware Package (included):

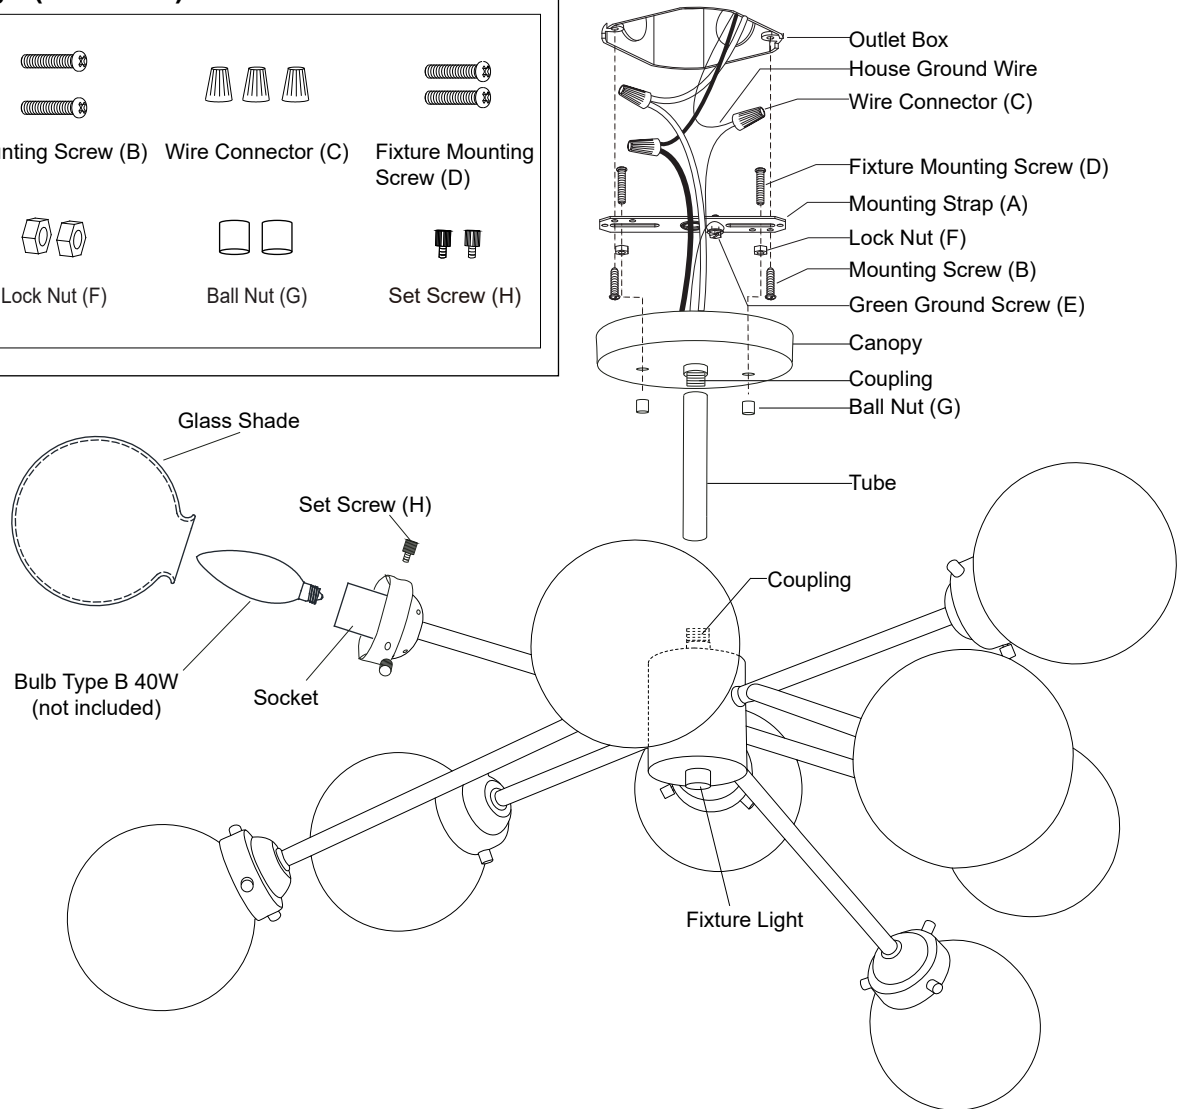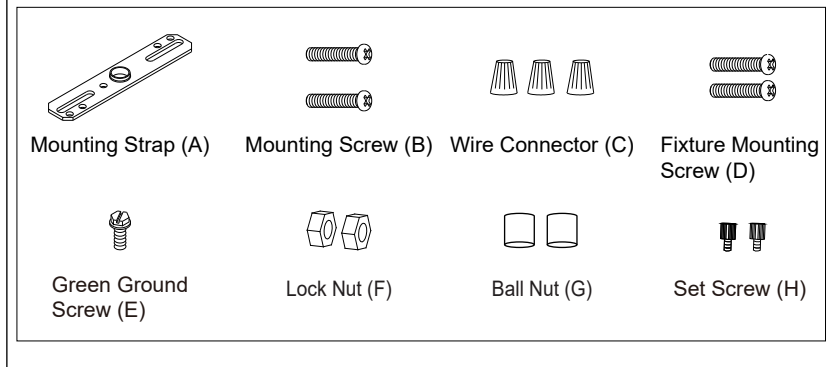

## Installation Steps

Turn off the power at fuse or circuit box

1. Attach two fixture mounting screws (D) to the mounting strap (A), then secure it with two lock nuts (F). Adjust the length of the fixture mounting screws (D) if necessary.
2. Attach the mounting strap (A) to the outlet box using two mounting screws (B).
3. Rotate coupling of the fixture light and the canopy into the both ends of the tube.

 VAXCEL











191111


4. Pull out the source wires from the outlet box. Make wire connections using wire connector (C) as follows:
  - Connect the black wire from the fixture to the black wire from the power source.
  - Connect the white wire from the fixture to the white wire from the power source.
  - Attach the fixture ground wire to the mounting strap (A) with the green ground screw (E), then connect it to the house ground wire with a wire connector (C).
 Carefully put the wires back into the outlet box.
4. Install the bulbs (not included). Check relamping label at socket area or packaging for maximum wattage allowed .
5. Attach the glass shade onto the socket and tighten it with set screws (H).
6. Attach the canopy onto the outlet and tighten it with two ball nuts (G).

**Turn on the power at fuse or circuit box**

The following parts are available for re-order if damaged or missing.

**Spare Parts List:**

				 <p>Assembly Kit 6167MM (1SET)</p>
Mounting Strap (A)	Mounting Screw (B)	Wire Connector (C)	Fixture Mounting Screw (D)	
				 Glass Shade 9847CG
Green Ground Screw (E)	Lock Nut (F)	Ball Nut (G)	Set Screw (H)	

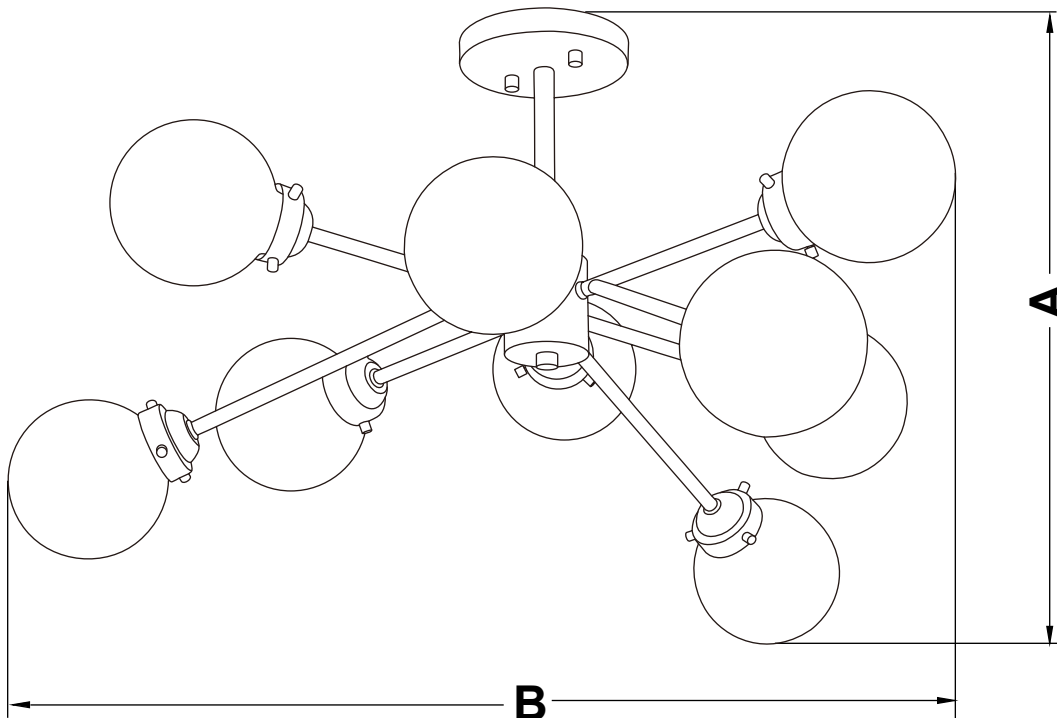

**A: 15-1/2"**  
**B: 32"**