


# ASSEMBLY AND INSTALLATION INSTRUCTIONS

C0222

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

**NOTES:** 1. Before installing, consult local electrical codes for wiring and grounding requirements.  
2. READ AND SAVE THESE INSTRUCTIONS.

## Hardware Package (included):

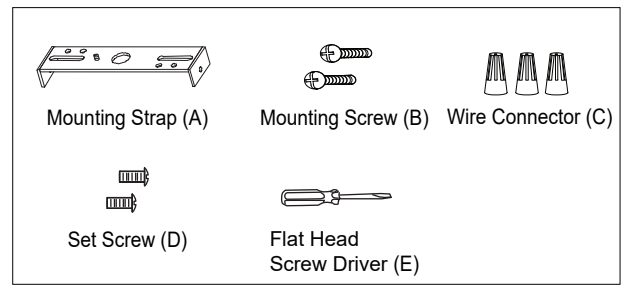

## Installation Steps

Turn off the power at fuse or circuit box.

1. Connect mounting strap (A) to the outlet box with two mounting screws (B).
2. Adjusting the steel wires and fixture wire length:
  - a. Reduce the steel wires length:  
Push the steel wires into the canopy to adjust the steel wires to the desired length.
  - b. Increase the steel wires length:  
Press the buttons under the canopy, pull the steel from the canopy to adjust the steel wires to desired length.  
Release the buttons to hold the steel wires in position, as shown in the diagram.
  - c. Loosen the plastic screw by using a flat head screwdriver (E) and adjust the fixture wire to the desired length, then tighten the plastic screw back into the hole as shown in the diagram.
3. When you cut the wire for appropriate length, strip 3/4 in. of insulation from wire ends.  
Pull out the source wires from the outlet box. Make wire connections using wire connectors as follow:
  - Connect the hot wire (labeled L) from the fixture to the black wire from the power source.
  - Connect the neutral wire (labeled N) from the fixture to the white wire from the power source.
  - Attach the fixture ground wire (labeled  $\oplus$ ) to the mounting strap with the green ground screw.
 Then connect it to the house ground wire with the wire connector (C).  
Carefully put the wires back into the outlet box.
4. Fasten the canopy to the mounting strap with 2 side set screws(D).
5. Hang glasses as shown in the diagram (See Fig.1).
6. Install the G9 base 4 X 40w Max bulbs (included) .


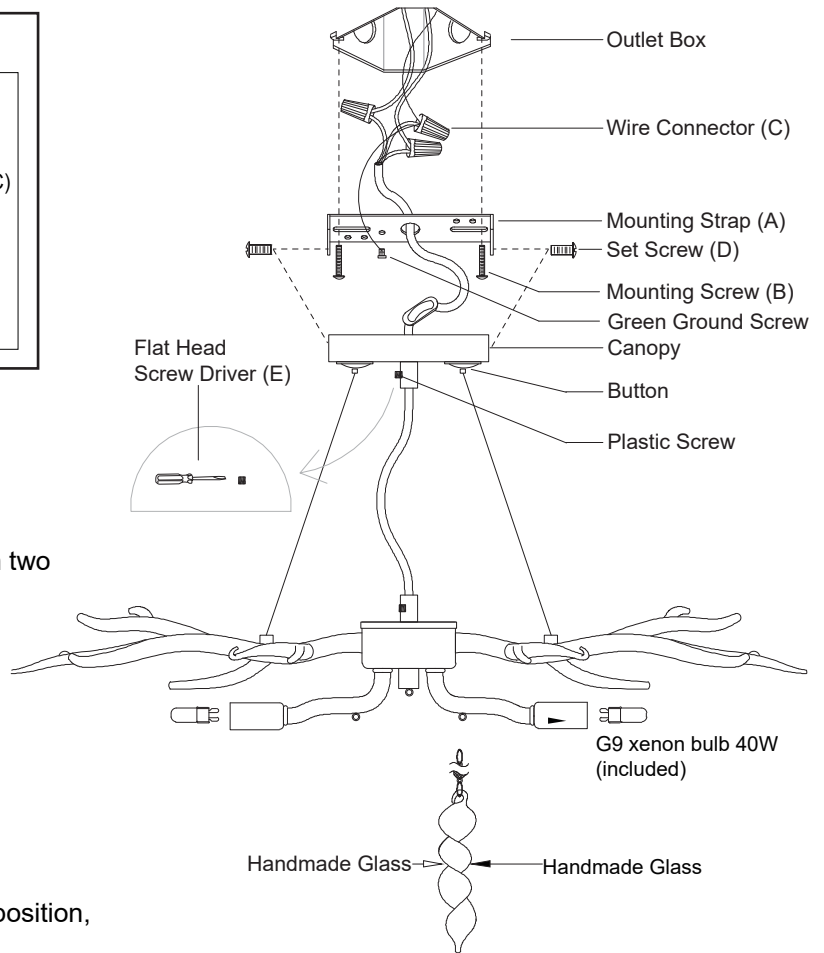


Fig.1

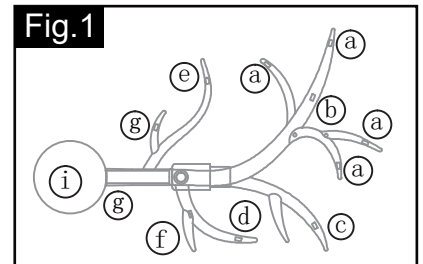

Turn on the power at fuse or circuit box.


The following parts are available for re-order if damaged or missing.

**Spare Parts List:**

			→ Assembly Kit 6095MM (1 SET)
Mounting Strap (A)	Mounting Screw (B)	Wire Connector (C)	
Set Screw (D)	Flat Head Screw Driver (E)	G9 xenon bulb 40W 8069HL	

(16 clusters)	(4 clusters)	(4 clusters)	(4 clusters)	(4 clusters)	(4 clusters)	(8 clusters)	(1 clusters)
5117CD	5118CD	5119CD	5120CD	5121CD	5122CD	5123CD	5125CD

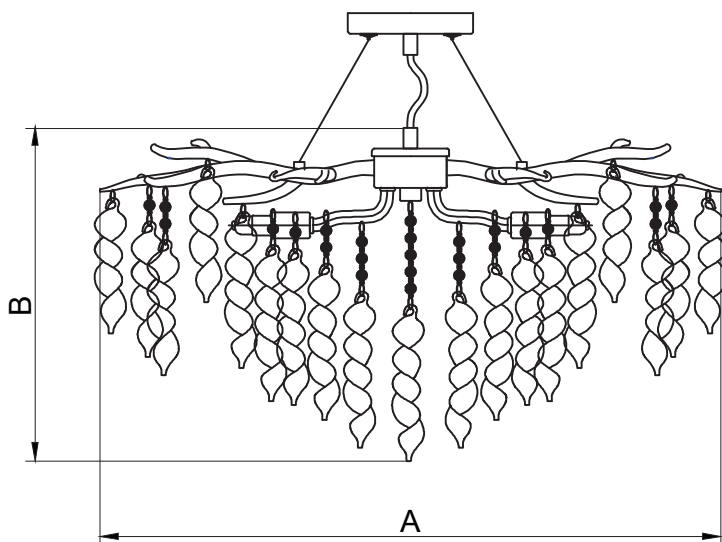

**A: 24"**  
**B: 13"**