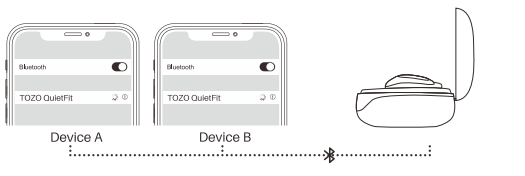
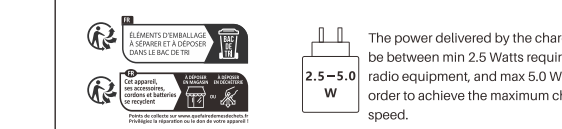
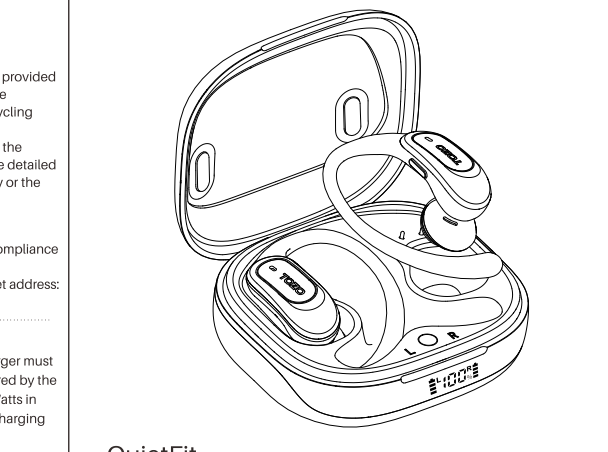


QuietFit说明书
尺寸: 76mm*85mm

TOZO® EN  Note: The last active device controls playback. If Device B starts playing while Device A is active, playback on Device A will pause, and the earbuds will switch to Device B. 9.0 Charging and Display 9.1 Charging Case Display The display remains off by default. Opening the case shows the battery levels for both the earbuds and the case, allowing for a connection. When the earbuds are placed back in the case, the remaining battery levels are updated. 9.2 Charging Case Indicators The screen lights for 5 seconds during case opening/closing, earbud insertion/removal, or reset button press. It stays on while charging. 9.3 Charging The screen shows the charging progress. Charging will stop when the case battery level drops below 5%, but you can still power off the earbuds to conserve energy. To prevent interruptions, make sure to charge the case before the battery reaches 5%. A full charge takes approximately 2 hours. For products that are rarely used, remember to charge the case and insert or remove the earbuds every six months. 07	TOZO® EN 10.0 TOZO APP Download the TOZO App for a fully personalized experience. • UI Customization: Customize most control settings via the app. • EQ Settings: Choose from a variety of EQ presets to match different music styles. • Firmware Updates: Get the latest firmware updates for your earbuds through the app. You'll receive a notification when a new firmware version is available. 11.0 TOZO APP pairing Step 1: Download the TOZO App from the App Store or Google Play.  Step 2: Connect the earbuds to your phone via Bluetooth.  08	TOZO® EN Step 3: Pair the earbuds with the TOZO App.  12.0 FCC Compliance Statements This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: 09	TOZO® EN -- Reorient or relocate the receiving antenna. -- Increase the separation between the equipment and receiver. -- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. -- Consult the dealer or an experienced radio/TV technician for help. This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. FCC Radiation Exposure statement The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction. 10	TOZO® EN 13.0 ISED Compliance Statements ISED Radiation Exposure statement The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction. Déclaration d'exposition aux rayonnements ISED Le dispositif a été évalué en fonction des exigences générales d'exposition aux RF. L'appareil peut être utilisé en condition d'exposition portable sans restriction. -The device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions: -(1) This device may not cause interference. -(2) This device must accept any interference, including interference that may cause undesired operation of the device. -L'émission/réception exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : -1. L'appareil ne doit pas produire de brouillage; -2. L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement. 11	TOZO® EN 14.0 EU Battery Regulation This symbol on the battery(ies) or on the packaging indicates that the battery(ies) provided with this product shall not be treated as household waste. Instead, please separate battery(ies) from other types of waste and recycle it (them) through your local recycling system to protect environment and health. (When Cd is more than 20ppm or Pb is more than 40ppm, the chemical symbol of the excess substance shall be marked under the separate collection symbol) For more detailed information about recycling of this battery(ies), please contact your local authority or the shop where you purchased the product or battery(ies). 15.0 CE-DOC Hereby, [Manufacturer] declares that the radio equipment type [Model No.] is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: www.tozostore.com  The power delivered by the charger must be between min 2.5 Watts required by the radio equipment, and max 5.0 Watts in order to achieve the maximum charging speed. 12	TOZO® www.tozostore.com  QuietFit Wireless headset T11199 User Manual 13
--	---	---	---	--	---	--

TOZO® EN 1.0 Product Overview and Features The package includes TOZO QuietFit earbuds, a charging case, a USB-C cable, extra ear tips, and instructions 2.0 Wearing Guide For the best fit, insert the earbuds into your ears and adjust the angle slightly to gently push them into the ear canal. 01	3.0 Pairing and Connectivity - Open the charging case lid; the white light will blink, indicating pairing mode. - Find [TOZO QuietFit] in your phone's Bluetooth settings and pair. - Once paired, the earbuds will automatically reconnect to the last connected device when the case is opened. 4.0 Power On/Off 4.1 Auto Power On Open the charging case to power on the earbuds automatically. 4.2 Auto Power Off Place the earbuds back into the charging case and close the lid to power them off automatically. 4.3 Manual Power On/Off - Hold the MFB for 3 seconds to power on when the earbuds are off. - Hold the MFB for 5 seconds to power off when not playing media. The earbuds will power off automatically if disconnected for more than 5 minutes. 5.0 Operation and Controls 5.1 Using One or Both Earbuds 02	TOZO® EN 5.2 Call Controls 5.3 Active Noise Cancellation Control Note: The Active Noise Cancellation function is not available when using one earbud. 03	TOZO® EN 5.4 Voice Assistant 5.5 Reset If only one earbud is working, try cleaning or resetting: 1. Clean the charging contacts on the earbuds and case. 2. Basic Reset: Place both earbuds in the case, close it, and wait 10 seconds. The white LED will light once. 3. Force Reset: Place both earbuds in the case with the lid open. Press and hold the reset button for 10 seconds until the white LED flashes three times. If the Basic Reset is unsuccessful, try the Force Reset to perform a complete reset and re-pair via Bluetooth. 6.0 Active Noise Cancellation Mode and Transparency Modes 6.1 Active Noise Cancellation Mode TOZO QuietFit earbuds use a feedforward microphone to detect external sounds and generate anti-noise signals to cancel them before they reach your ears. A feedback microphone also detects internal sounds and reduces them through the same anti-noise system. 04	TOZO® EN 6.2 Transparency Mode Transparency Mode enhances the voice frequency range to help you stay aware of your surroundings. This allows you to hear ambient sounds clearly without removing your earbuds. Note: For best performance, wear your TOZO QuietFit earbuds properly to ensure a secure fit. 7.0 Forced Pairing Mode To connect to a new device: 1. Place earbuds in the case and keep the lid open. 2. Press and hold the reset button for 3 seconds to disconnect previous devices. 3. Turn on Bluetooth on your new device to start pairing. 8.0 Multipoint Connection The TOZO QuietFit earbuds can connect to two devices simultaneously, such as phones, tablets, or laptops. 05	TOZO® EN - Power on the earbuds and pair them with Device A. - Disconnect Device A, then enter pairing mode and connect to Device B. - Reconnect Device A by selecting it from your Bluetooth list. The earbuds will then be connected to both devices simultaneously. 06	Thank you for purchasing the TOZO authentic product. For more latest products, parts and accessories, please visit: www.tozostore.com For any assistance please contact Email: info@tozostore.com FC RoHS CE 07
---	--	---	---	--	--	---