















ASSEMBLY AND INSTALLATION INSTRUCTIONS

LK55416 & LK55516 & LK55616 & LK55716

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. Read and save these instructions.

Hardware Package (included): For Chandelier

AA		Mounting Strap X1	EE		Mounting Screw X2	II		Green Ground Screw X1	LL		Collar X1
BB		Wire Connector X3	FF		Loop Lock X2	JJ		Washer X2	MM		Loop X1
CC		Hex Nut X1	GG		Canopy X1	KK		Thread Pipe (-b) X1	NN		Fixture Ground Wire X1
DD		Top Loop X1	HH		Chain X1						

Hardware Package (included): For Light Kit


CC		Hex Nut X1	JJ		Washer X1	OO		Set Screw X9
----	--	---------------	----	--	--------------	----	--	-----------------



Glass Shade (3 PCS)



LED (3 PCS)

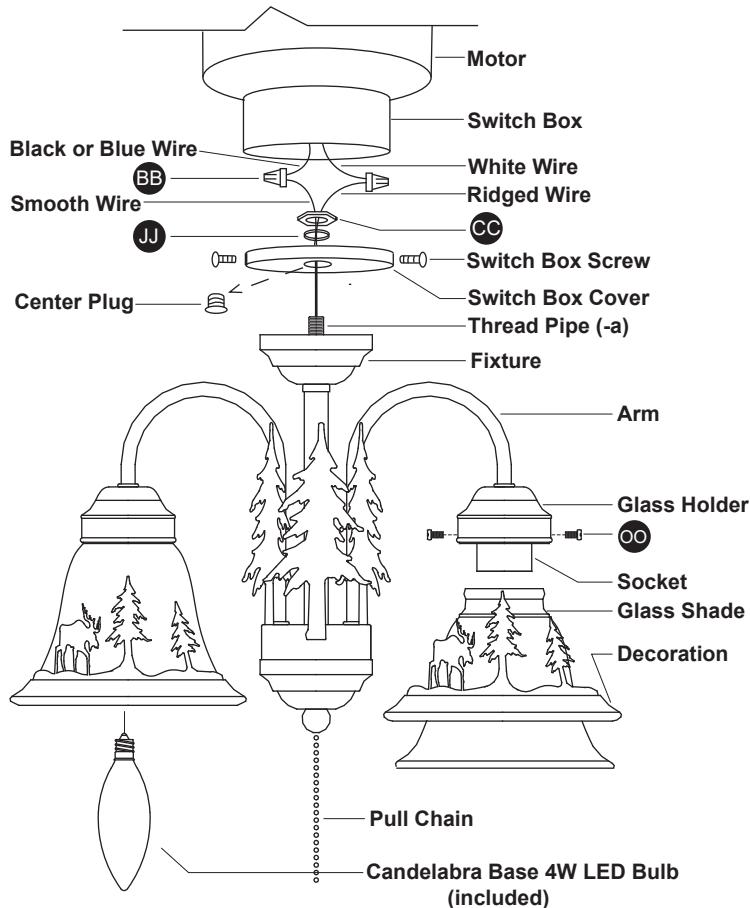

Installation Steps

Turn off the power at fuse or circuit box.



For Light Kit:

1. Remove the switch box cover from the switch box of the fan by loosening the three switch box screws.
2. Unscrew the center plug from the switch box cover and discard it.
3. Attach thread pipe(-a) of the light kit to the switch box cover, then secure it with a washer(JJ) and hex nut(CC).
4. Pull out the wires from the switch box.
Make wire connections using the wire connectors(BB):
--- The smooth (marked) wire from the fixture to the black (or blue) wire from the switch box.
--- The ridged (unmarked) wire from the fixture to the white wire from the switch box.
Carefully put the wires back into the switch box.
5. Attach the switch box cover back to the switch box using the three switch box screws.
6. Carefully place the decorations onto the glass shades. Then attach the glass shades to the glass holders and secure them with the set screws(OO).
7. Install bulbs (included). See relamping label at socket area or packaging for maximum allowed wattage.
8. Turn on the power at the main fuse or circuit breaker box. (You can control the light with the pull chain.)

For Mini Chandelier: (See Fig. 1 & Fig. 2)

1. Take out the loop(MM), fixture ground wire(NN) and washer(JJ) from the hardware package for Mini Chandelier.
2. Adjust the hex nut(CC) on thread pipe(-a) to make a length of 1/2" from the top of thread pipe(-a) to the top of the hex nut(CC). (See Fig.1)
3. Attach a washer(JJ) and the ground pad to the hex nut(CC) on thread pipe(-a), then secure them with the loop(MM).
4. Choose the length of the chain you need, then weave the fixture wire and the fixture ground wire(NN) through the chain. Then connect one end of the chain with the loop(MM) by using one loop lock(FF).
5. Secure the top loop(DD) to thread pipe(-b) (KK).
6. Thread the fixture wire and fixture ground wire(NN) through the collar(LL), canopy(GG), top loop(DD), thread pipe(-b) (KK) and mounting strap(AA).
7. Connect the other end of the chain with the top loop(DD) by using the other loop lock(FF).
8. Pull out the outlet wires and the house ground wire from the outlet box. Make wire connections using the wire connector(BB):
--- The smooth wire (marked) from the fixture to the black wire from the power source.
--- The ridged wire (unmarked) from the fixture to the white wire from the power source.
--- Attach the fixture ground wire(NN) to the mounting strap(AA) with the green ground screw(II). Then connect it to the house ground wire with a wire connector(BB).
Carefully put the wires back into the outlet box
9. Attach the canopy(GG) to the mounting strap(AA) by inserting the top loop(DD), then secure it with the collar(LL).
10. Repeat the steps 6~8 for Light Kit.

Turn on the power at fuse or circuit box.

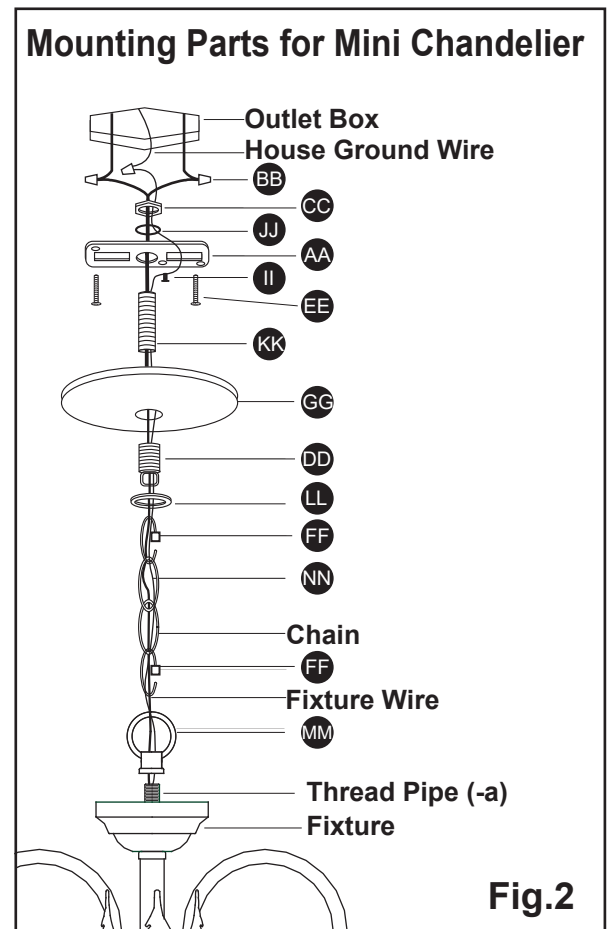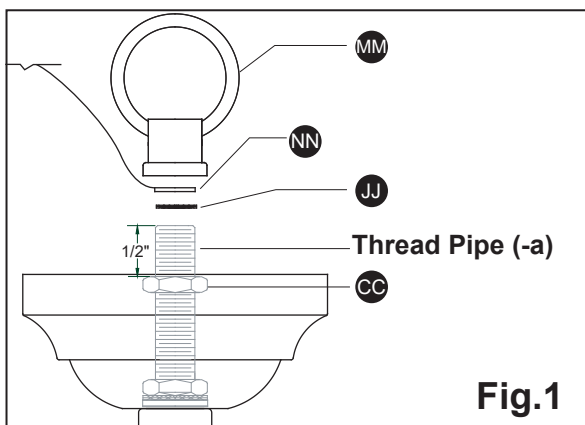

The following parts are available for re-order if damaged or missing.


Spare Parts List:

AA		Mounting Strap X1	FF		Loop Lock X2	KK		Thread Pipe X1
BB		Wire Connector X3	GG		Canopy X1	LL		Collar X1
CC		Hex Nut X1	HH		Chain X1	MM		Loop X1
DD		Top Loop X1	II		Green Ground Screw X1	NN		Fixture Ground Wire X1
EE		Mounting Screw X2	JJ		Washer X2			

Assembly Kit
4172MM
(1 SET)

CC		Hex Nut X1	JJ		Washer X1	OO		Set Screw X9
----	--	---------------	----	--	--------------	----	--	-----------------


Assembly Kit
4173MM
(1 SET)




Glass Shade
938316
(3 PCS)




LED 8096LD (3 PCS)

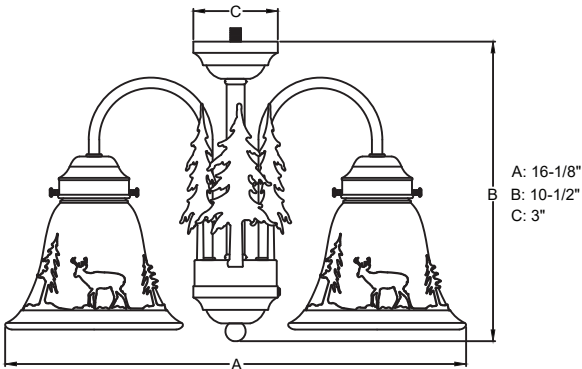


LK55416BBZ-C

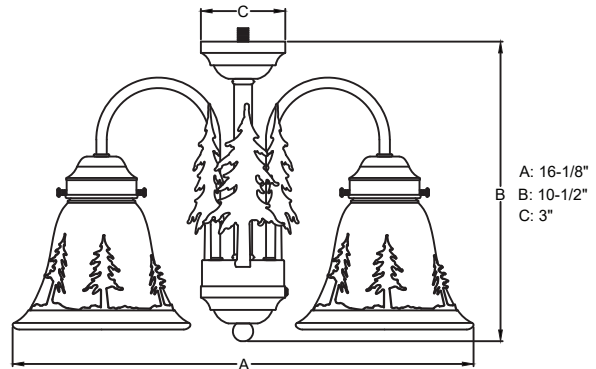

LK55516BBZ-C

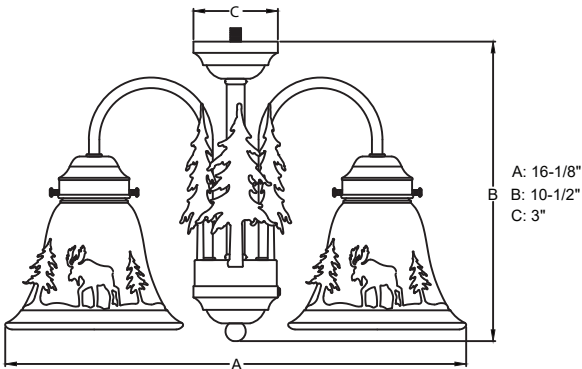

LK55616BBZ-C

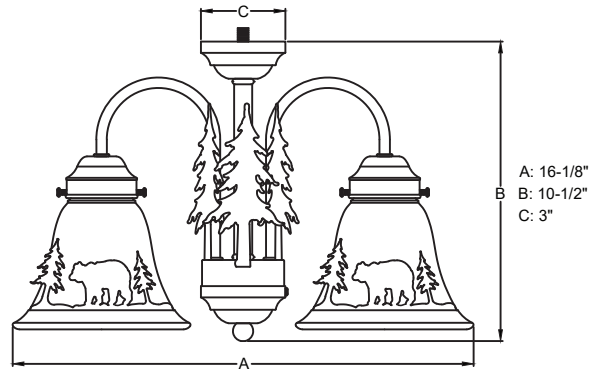

LK55716BBZ-C