

Model: K302 | Color: Black and Gold

Overview

The Tastyle Single Serve Coffee Maker is a compact, portable drip coffee machine designed for brewing one cup of coffee at a time. It is compatible with K-Cup pods and ground coffee. Its small size and integrated handle make it suitable for travel, camping, offices, RVs, and dorm rooms.



Features and Components

Physical Components

- **Portable Handle:** Integrated into the top of the unit for easy carrying.
- **Water Tank:** 12 oz (355 ml) capacity with visible volume markings (6, 8, 10, 12 oz).
- **Brew Button:** Single button located on the front to start the brewing cycle.
- **Brew Head:** Lid that opens to insert the K-Pod holder or ground coffee filter.
- **Drip Tray & Cup Stand:** Removable tray to catch spills and accommodate a mug up to 7.3 inches tall.
- **Power Cord:** Attached 120V AC power cord.

Included Accessories

- **K-Pod Holder:** For use with K-Cup style coffee pods.
- **Reusable Ground Coffee Filter:** For use with up to 20g of ground coffee. Includes a filter lid to prevent grounds in your coffee.
- **Note:** Both the K-Pod holder and ground filter are dishwasher-safe.

Tastyle

PORTABLE MINI

Single Serve Coffee Maker



BREW K-POD



BREW GROUND COFFEE
reusable filter included



EASY-CARRY HANDLE
just 2.4lb, easy to take anywhere



ONE-BUTTON
EASY USE



BPA FREE



18-Month Commitment



Technical Specifications

- **Brand:** Tastyle
- **Model:** K302
- **Voltage:** 120V
- **Wattage:** 800W
- **Brew Sizes:** 6, 8, 10, 12 oz (adjustable via water volume)
- **Dimensions:** 8.1"D x 4.6"W x 9.8"H
- **Weight:** 2.4 lbs
- **Special Features:** Descaling reminder, automatic shut-off, water shortage alert, overheat protection.
- **Certifications:** ETL certified, BPA-free.

Safety Information

- This appliance is for household use only.
- Operate on a stable, flat, heat-resistant surface.

- Do not immerse the main unit, power cord, or plug in water.
- Unplug the unit when not in use and before cleaning.
- Do not operate without water in the tank.
- The exterior surfaces may become hot during use.
- This unit features multiple safety protections: ETL certification, BPA-free materials, water shortage alerts, and overheat protection.

Use Guide

Initial Setup and First Use

1. Remove all packaging materials.
2. Wash the K-Pod holder and reusable ground coffee filter with warm, soapy water (both are dishwasher-safe). Rinse thoroughly.
3. Place the coffee maker on a stable, level surface.
4. Fill the water tank to the 12 oz mark with fresh, cold water.
5. Without adding coffee, place a mug on the drip tray and close the brew head.
6. Plug the unit into a standard 120V electrical outlet.
7. Press the brew button to run a water-only cycle. Discard this water. This cleans the internal system.

Brewing with a K-Cup Pod

Tastyle

#1 Coffee Maker Brand on Amazon in 2025

Fastest-Growing

*Source: Amazon US sales, 2024-2025

Safety Certification

ETL LISTED US ETL Listed

BPA FREE BPA Free

Complies with FDA regulations

CNAS CNAS

The advertisement features a woman in a light green shirt smiling while holding a white coffee cup in her right hand and a black and gold Tastyle coffee maker in her left hand. To the left of the woman is a large gold trophy. The background is a bright, clean kitchen setting.

1. Ensure the unit is unplugged.
2. Fill the water tank with cold water to your desired cup size (6, 8, 10, or 12 oz).
3. Open the brew head lid.
4. Insert the **K-Pod holder** into the brew head.
5. Place a K-Cup pod into the holder.
6. Close the brew head lid firmly.
7. Place a suitable mug (up to 7.3" tall) on the drip tray.
8. Plug the unit into the outlet.
9. Press the brew button. The brewing cycle will begin and automatically shut off when complete (approx. 3 minutes).
10. Unplug the unit. Carefully remove the used K-Cup pod after the brew head has cooled.

Brewing with Ground Coffee




1. Ensure the unit is unplugged.
2. Fill the water tank with cold water to your desired cup size.
3. Open the brew head lid and remove the K-Pod holder if present.
4. Insert the **reusable ground coffee filter**.
5. Add up to 20g (approximately one tablespoon) of medium-coarse ground coffee into the filter. Place the filter lid on top.
6. Close the brew head lid firmly.
7. Place a mug on the drip tray.
8. Plug the unit into the outlet.
9. Press the brew button. The brewing cycle will begin and automatically shut off when complete.
10. Unplug the unit. Discard the used grounds and rinse the filter after the brew head has cooled.

Power Note for Camping/RV Use

The coffee maker operates at 120V and 800W. If using while camping with a power bank, the power bank must provide at least 100V output and 500W power. Note that brewing at 100V will take longer than usual.

Cleaning and Maintenance

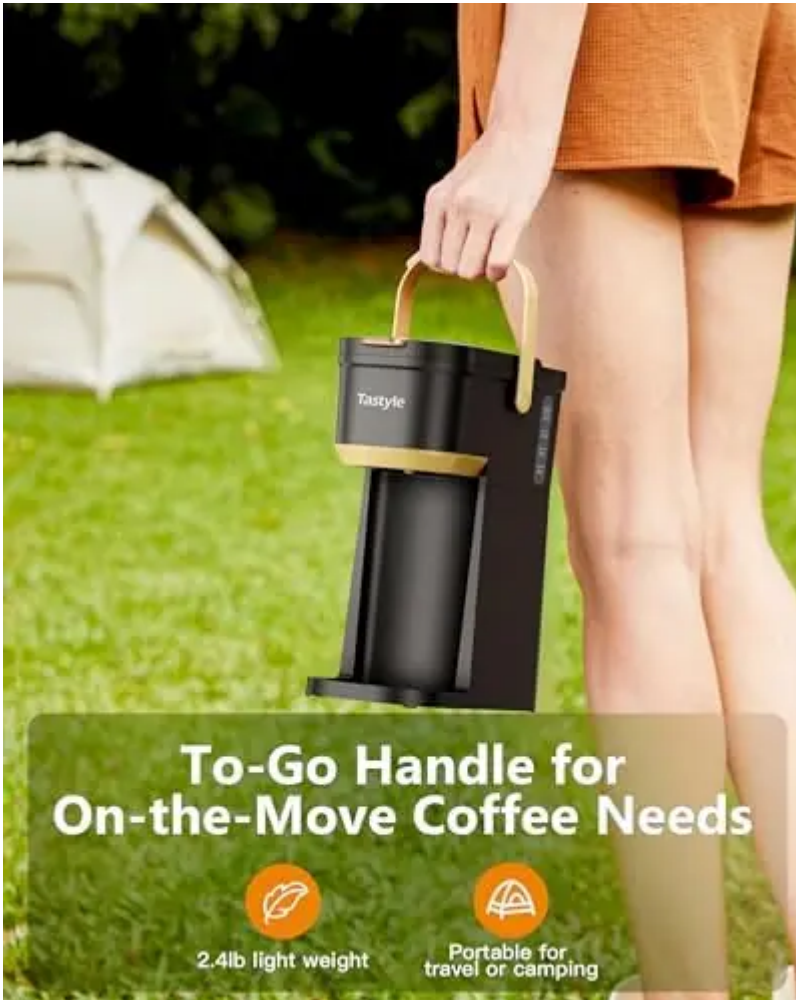

Daily Cleaning

- Unplug the unit and allow it to cool.
- Remove and rinse the drip tray.
- Wipe the exterior with a soft, damp cloth. Do not use abrasive cleaners.
- Empty and rinse the water tank after each use.
- Rinse the K-Pod holder or ground coffee filter after each use. Both are dishwasher-safe.

Descaling (Mineral Build-up Removal)

Regular descaling improves coffee taste and prolongs the machine's life. A descaling reminder function is included. Descaling frequency depends on water hardness; typically every 1-3 months.

1. Fill the water tank with 12 oz of a descaling solution (as per solution instructions) or a mixture of equal parts white vinegar and water.
2. Without coffee or a filter in the brew head, place a large mug or container on the drip tray.
3. Plug in the unit and press the brew button to run the solution through the system.
4. Discard the solution from the mug.
5. Rinse the water tank thoroughly. Fill with fresh cold water and run at least two full brewing cycles (without coffee) to flush the system completely.
6. Wipe the exterior clean.

Self-Cleaning Function

For general internal cleaning, you can run a water-only brew cycle (without coffee) as described in the Initial Setup section.

Troubleshooting

Problem	Possible Cause	Solution
Coffee maker does not turn on.	Not plugged in. Power outlet issue.	Ensure the power cord is securely plugged into a working 120V outlet.
No water flows during brewing.	Water tank is empty. Brew head not closed properly.	Fill the water tank. Ensure the brew head lid is firmly closed.
Water leaks from the unit.	Water tank not seated correctly. Overfilled water tank.	Ensure the water tank is properly inserted. Do not fill beyond the 12 oz mark.
Coffee tastes weak or bitter.	Incorrect coffee amount or grind size. Mineral build-up.	Use the correct amount of coffee (up to 20g grounds). Use a medium-coarse grind. Descale the unit.
Unit stops brewing prematurely.	Water shortage alert activated.	Ensure the water tank has sufficient water. The unit has an automatic shut-off for dry boiling.
Grounds in coffee.	Filter lid not used or improperly placed.	Always use the provided lid on the ground coffee filter.

Specifications Summary

- **Coffee Input Type:** K-Cup Pods, Ground Coffee
- **Brew Size:** 6, 8, 10, 12 oz (adjustable)
- **Water Tank Capacity:** 12 oz
- **Power:** 120V, 800W
- **Automatic Shut-Off:** Yes
- **Special Feature:** Descaling Reminder
- **Material:** BPA-Free Plastic
- **Dishwasher Safe Parts:** K-Pod Holder, Ground Coffee Filter

Warning

This content is compiled from multiple sources and is provided for reference purposes only. It may not be complete or fully applicable to all situations. If you are unable to resolve your issue, please contact the product manufacturer or an authorized service provider for official support.