


# Security Door Lock Installation Instructions

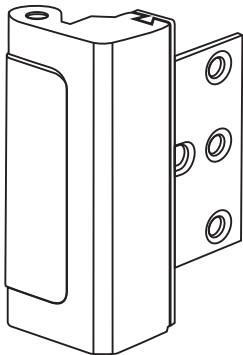

## Warranty

Dear customer, Thanks so much for choosing EverPlus, for warranty service and support, please contact our service team. EverPlus promise: FREE RETURN, FREE REPLACEMENT or FULL REFUND to solve your issue and make you satisfied.


✉ [service@everplus-us.com](mailto:service@everplus-us.com)

🌐 [www.everplus-us.com](http://www.everplus-us.com)


☎ +1 877 338 6829  
(Toll Free 4:30 PM to 6:00 AM PST)

Scan QR code to activate lifetime warranty.





**Locked**



**Unlocked**

## Tool Required



Electric drill and drill bit



Pencil



Hammer side



Chisel

### NOTE:

1. If the gap between the door edge and the jamb is not enough to put down the mounting plate of the security door lock, you need to use the hammer side and chisel.
2. Always **PRE-DRILL HOLES** with electric drill to prevent screws from damage before installing the screws.

## Installation Steps



Fig.1

**Step 1:** Test whether it fits well between the door edge and the jamb When the door is closed and the door lock is in a LOCKED position. If they are not suitable, you need to use a wooden chisel to make a groove in the door frame to make the door to close normally.

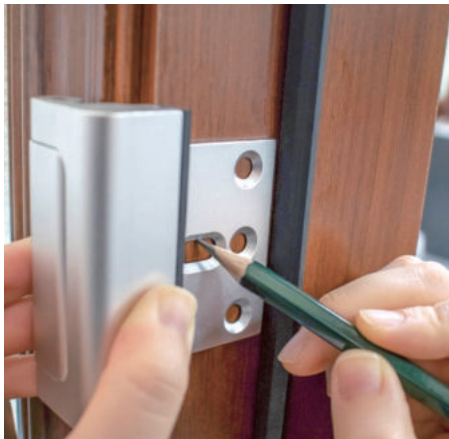


Fig.2

**Step 2:** Choose the location for the security door lock on the interior side of an inward swinging door, make a mark with a pencil.



Fig.3

**Step 3:** Pre-drill hole before drilling the short screw into the oblong hole with a power drill. Close the door and the security door lock to assure proper position.



Fig.4

**Step 4:** Pre-drill holes before drilling the screws into other 3 holes with a power drill, then test for proper operation.

We recommend using short screws first. Please make sure your door frame is thick enough if you want to use long screws.

## FAQ:

Q: What if screws are broken during installation?

A: Please pre-drill holes and do not use excessive speed during installation. And contact us, we will send you some new screws for free.

Q: What to do if the rubber strip falls off?

A: The rubber strip is detachable. Install video:  
<https://youtu.be/0v1w9b00OoQ>

Q: What if the surface of the lock is flawed, or the lock is damaged after using it for several days?

A: Just contact us and we will re-send you a new one.

## CONTACT US

We provide a 5-year warranty. If the door lock has any defects, we will be solely responsible.

Email: [doorhardwareandlocks@outlook.com](mailto:doorhardwareandlocks@outlook.com)

Skype: +86 13243726296

Toll free: +18883692169 (17:30 PM to 7:00 AM PST)

Address: 525, Building 1, Baijin Holiday

Apartment, Xixiang Street, Shenzhen, China