


ASSEMBLY AND INSTALLATION INSTRUCTIONS

351-3235

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK. BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirements.

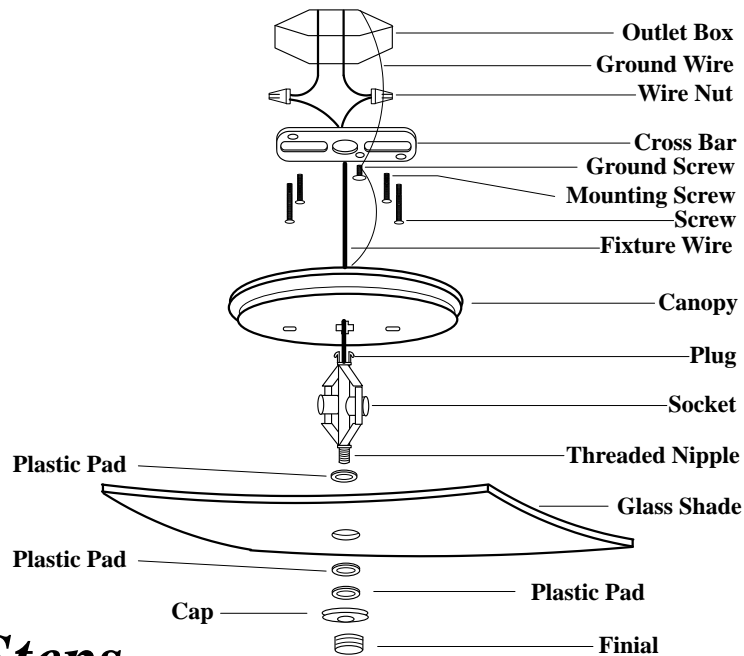

Installation Steps

1. Attach the 2 screws to the cross bar upwards.
2. Attach the cross bar to outlet box by using 2 mounting screws
3. Thread the fixture wires through the canopy, then attach the plug on the top of the socket to the canopy.
4. Make wire connections:
 - Black wire from light to black wire from power source.
 - White wire from light to white wire from power source.
 - Attach the ground wire and house ground wire to cross bar with a green ground screw.Carefully tuck wires back into the outlet box.
5. Attach the canopy to the cross bar by inserting the 2 screws and rotate until fixture locks in place, then secure the screws tight.
6. Install bulbs. (Please do not exceed the maximum capacity recommended on the package)
7. Set the plastic pad through the threaded nipple, then attach the glass shade, the plastic pads, the cap to the socket by inserting the threaded nipple, then secure with the finial.
8. Turn power on at fuse or circuit box.

*Patriot Lighting*TM