


FD10215 Tubular Motor -Operating Manual


Company reserves the right to change product design and specifications without prior notice then, photos are for reference only. A/0 H12305

Pairing method: Motor enters pairing mode when powered on, and exits after 5s (no any prompts).




Power on motor, press transmitter [Code] within 5s

Clear pairing : Clear all pairing on the motor:

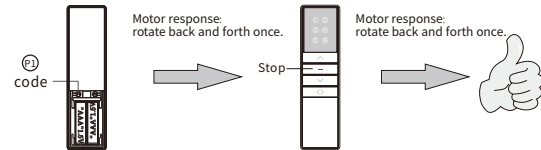


1、Press & Hold [Code] button on transmitter about 10s
2、press [Stop] button about 5s;

Inching / Continuous moving interchange: Default is continuous moving. After switching to inching moving, press & hold [Up] or [Down] button about 2s, motor will continuously moves:

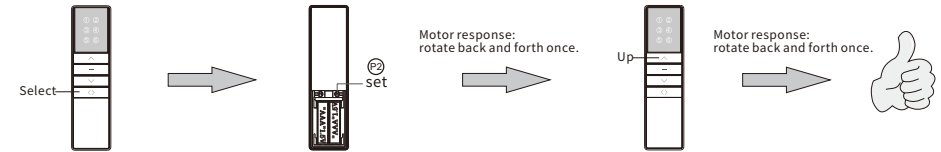


1、Select the channel that will be interchanged;
2、Press & Hold [Set] button on transmitter about 10s;
3、Within 10s after motor stops, press [Up] button about 5s;

Copy: Add a new channel to control motor. (No need to touch motor):

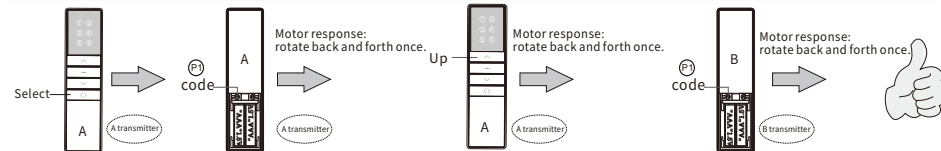


1.Select a channel that is already be paired
2、Press & Hold [Code] button on transmitter about 10s
3、Press & Hold [Up] button on transmitter about 5s
4、Within 10s after motor stops, pair on the new channe;

Reset direction : Reset motor direction. Such as: before reset, press transmitter up button, blinds run down. After reset, press transmitter up button, blinds run up.

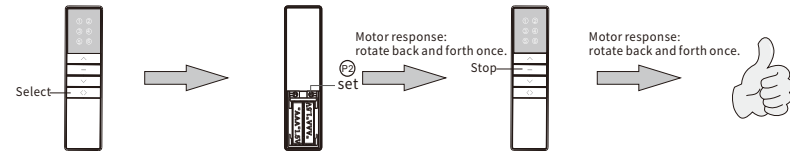


1.Select a channel that is already be paired
2、Press & Hold [Set] button on transmitter about 10s;
3、Within 10s after motor stops, press [Stop] button about 5s;

Speed setting: the first speed is defaulted before leaving the factory

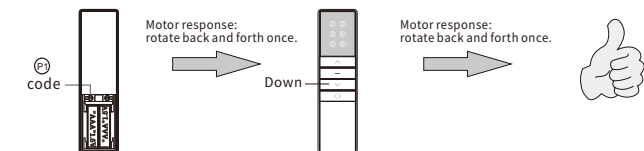


1、Press & Hold [Code] button on transmitter about 10s
2、Press & Hold [Down] button on transmitter about 5s


Adjusting Limits: When you press [Up] or [Down] button, the blinds will move up or down and stop automatically at the appointed position.

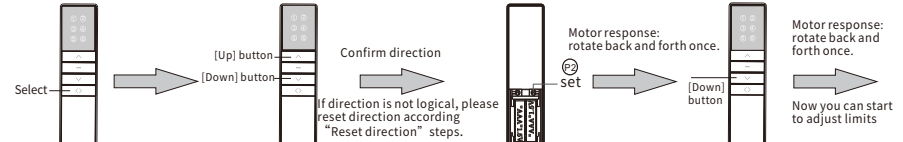

1.Select a channel that already be paired
2、Press up button, blinds up. Press down button, blinds down;
3、Press & Hold [Set] button on4、Within 10s after motor stops, transmitter about 10s;


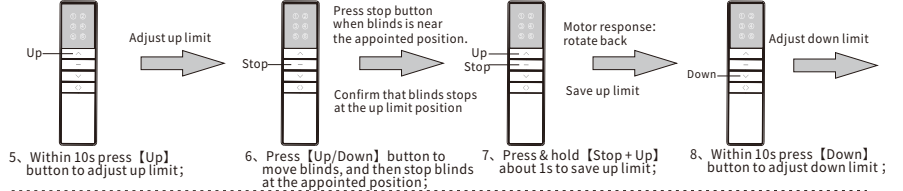


5、Within 10s press [Up] button to adjust up limit;
6、Press [Up/Down] button to move blinds, and then stop blinds at the appointed position;
7、Press & hold [Stop + Up] about 1s to save up limit;
8、Within 10s press [Down] button to adjust down limit;




9、Press [Up/Down] button to move blinds, and then stop blinds at the appointed position;
10、Press & hold [Stop + Down] about 1s to save down limit;

Adjust the third limit : Repeat the operation once to eliminate the third limit:

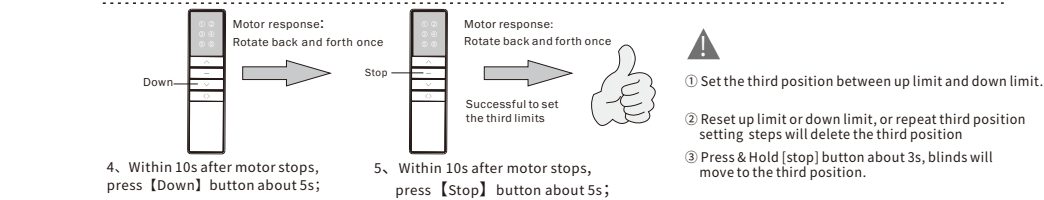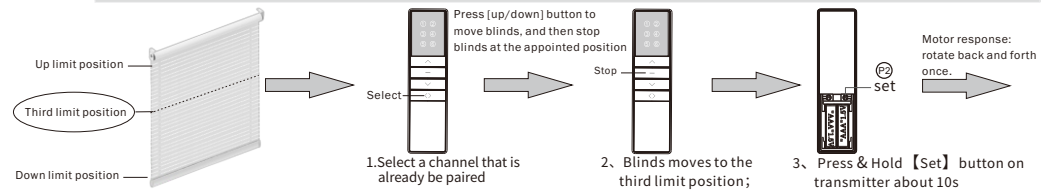

- ① Set the third position between up limit and down limit.
- ② Reset up limit or down limit, or repeat third position setting steps will delete the third position
- ③ Press & Hold [stop] button about 3s, blinds will move to the third position.


Reset Wi-Fi:

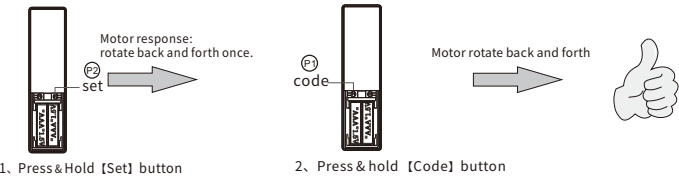


1、Press & Hold [Set] button

2、Press & hold [Code] button


Configure network method:

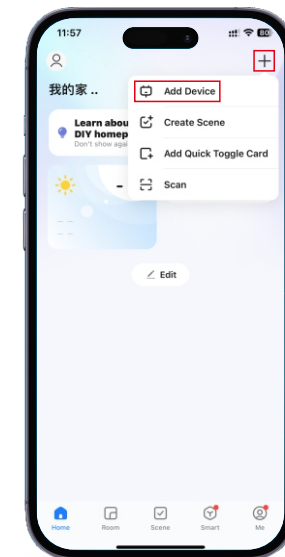


01.Open Tuya App, click "+" click "Add Device"

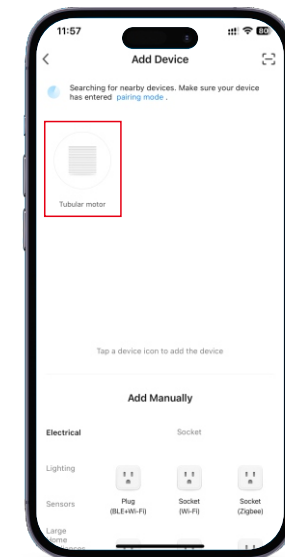


02.Waiting for device search

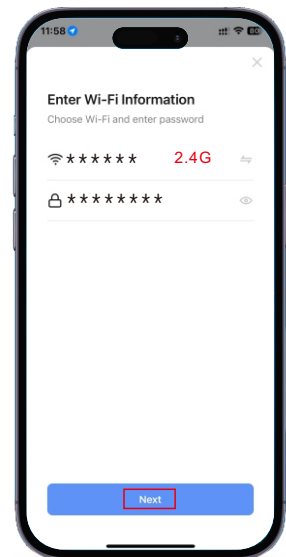


03.Input Wi-Fi name and password, then click "next"

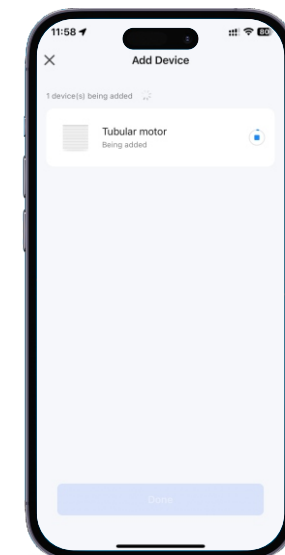

04.Waiting for connecting.

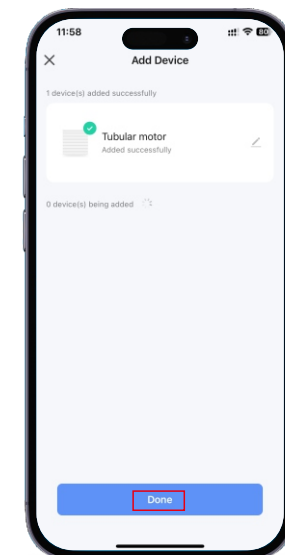

05.After added successfully, click "done"

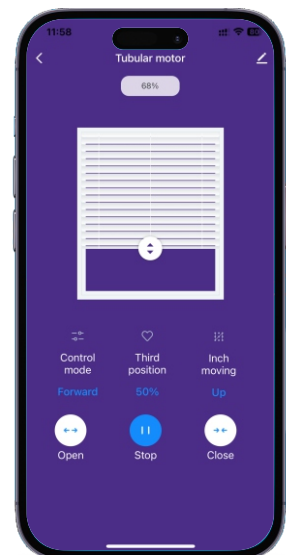

06.Operation interface

FCC WARNING

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum distance between 20cm the radiator your body: Use only the supplied antenna.