

USER MANUAL


Exclusive 3 channels camera

1.Product Specification

DDR	Built-in 64M
FLASH	8M SPI norflash
Display Screen	2.0 inch IPS HDscreen
LCD resolution	800×480 pixels
External port	MINIUSB 5V/2A power adapter port
	64G TF card(Max support 128G)
	2.5mm digital 2K rear view lens port
Speaker	Monophonic 15*10mm speaker
MIC	4015 Standard Omnidirectional Microphone
Features:	
Front camera	6-glass/F2.0aperture/170°wide angle
Inside camera (optional)	VGA 120°
GPS tracker	Support
AV OUT	NO
Rear camera	6M cable/2.5mm port
Photo	Support
Lens rotates	Adjust manually
WDR	Support
HDR	Support
Reversing visual	Support
Video format	AVI
Image format	JPG
Compression (format)	H.264
Battery	150mAh polymer lithium battery
Language	Support multi language
G-sensor	Support

Motion Detection	Support
Delay shutdown	Support
Loop recording	Support,Do not leak seconds
Sound record	Support
Fill light for night Vision	Support(Open manually)
Parking monitoring	Support
Front camera	4K
In-car camera resolution	2560×1440
Camera resolution	8M
Working Environment	
Operating temperature	-40°C~70°C
Operating humidity	15~65%RH
Storage temperature	-40°C~70°C

2.Key Features(picture for reference only,mainly in kind)

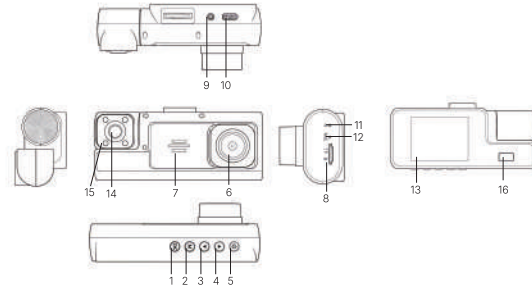

1. short press the start button after starting the machine to turn on or off the front fl light
2. long press the OK key after power on to turn on or off the internal lens fill light

- 1)confirmation key
- 2)Menu/Photo/playback button
- 3)Page Up
- 4)Page Down
- 5)the power button
- 6)Front camera
- 7)the microphone
- 8)TF card slot
- 9)Bracket bayonet
- 10)Rearview camera interface
- 11)reset button
- 12)the microphone port
- 13)display
- 14)In-car camera(optional)
- 15)Inside night vision infrared light
- 16)night vision light

【**P**】 Power button,short press to turn on/off screen,long press to switch on/off the device.
【**M**】 Menu/camera/playback button
Press 【**OK**】 key to stop recording,
press 【**M**】 to enter photo mode,
press 【**OK**】 to take photo;In the camera mode,
press 【**M**】 to enter playbackmode,
press 【**OK**】 key to playback.Lock function:In case of videorecording,
short press 【**M**】 for a key lock function to protect the currentvideo file,and this file will not be covered by the cycle video In video mode
long press 【**M**】 to enter video menu settings as follows:

Recorder Menu			
1	Resolution	4K/FHD/HD	
2	Loop recording	Off/1minutes/2minutes/3minutes	
3	High dynamic range HDR	on/off	Improved image quality,Better visual effect
4	Exposure compensation	-3,-2,-1,0,1,2,3	
5	Motion detection	on/off	In standby mode,it will automatically record while a objective moves
6	Sound record	on/off	Turn on/off sound record
7	Time stamp	on/off	
8	Car number	on/off	
9	G-snsor	High/Medium/Low Sensitivity	When car occur ellision/accident it will lock current video and can t be covered
10	Parking monitor	on/off	unattended surveillance
11	Date/time	Adjustment Years months date/hours Minutes seconds	
12	Automatic shut-down	Off/3minutes/5minutes 10 minutes	
13	kaypad tone	on/off	
14	OSD language	Support multi language	Choose a language

15	Light source frequency	50HZ/60HZ	Choose the Light soure frequency
16	format	Confirm/eancel	format TF card
17	Scroon saver	Off/30secones/1minute/ 2minutes	
18	Detault setting	Confirm/cancel	
19	varision	Machine software version number	

In photo mode,long press 【**M**】 to enter photo menu settings as follows:

1	Shooting method	Single shooting/2seconds timer/5seconds timer/10seconds timerAcutance
2	Resoluticn	1M/2M/8M
3	ContinLous shoting	on/off
4	Picture quality	High quality'standard/economy
5	Acutance	Strong/standard/soft
6	White balance	Automatic/sunligh/cloudy/tungsten lampifluorescent lamp
7	ISO	Automatic/100/200/400
8	Exposure compensation	-3,-2,-1,0,1,2,3
9	Time stamp	Off/Date

【**P**】 Down key,short press 【**P**】 to select function at the Menu interface,shot press button to turn on/off sound record at the shooting interface.
【**M**】 Up key,1,short press 【**M**】 to select function a the Menu interface;2.In case of video recording,short prass OK button to pause,then short press 【**M**】 button to switch front-inside view image(require inside view lens);
3.Jong press 【**M**】 button to switch front-rear view image;4.In case of front-rear view image,short press OK button to pause,then short press 【**M**】 button to switch front-rear view image (require rear view lens)
【**OK**】 Confirm button,short press to confirm in the menu interface,shor press to video record on/off in the video mode

Rear view lens(optional)
in case of video recording,4 pin plug of rear view lens insert AV-in hole of device,there's a rear view image in topriget of the screen,that means connected suGcessfully;short press OK button to pause,long press 【**M**】 button to switch front-rear view image,When hang up "R" gear,it will show full image of rear view

Note:This device can only support dual camaras to video record at the same time insteadof 3channels camera, that is front-inside camera or front-rear camera;if instilled a rearview camera and choose front-nside view mode,

camera and choose front-nside view mode,it will automaticaly indicate fullimage of car reversing visual when you hang up "R"gear,but wont effect front-inside video record,also will automaticallly switch back front-inside view after cancel"R"gear.
As for system update to support 3 channels camera to video record at the same time,pleaseprevail in kind and we're soy forno further notice.

Reset key 【**RESET**】
if the recorder crashes and accidental oparation is not a normal fault,press 【**RESET**】 to shutdown the device, then preßs 【**OK**】 to rebot the device

Installation Notes

- 1.Please test the rear view camera firstly,if it works well then install (package without rear view lens can be ignored).
- 2.Turn off the car engine.
- 3.The TFcar inserthe recorder slot.
【**Note**】 Please use the high-speed TF eard(Class10 above),capacity of not less than 4GB.TF card maximum support 32GB
- 4.The recorder via a bracket fixed to the front windshield of thecar.
- 5.Insert the carcharger into the car cigarette lighter.
【**Note**】 When wiring,extend the charging line along the edge of the car door frame and carpet under the car laying.
- 6.Install the rear camera at the rear of the vehicle,and pay attention to the up and downdirection.Wiring can be buried along the edge of the car roof laying. 【**Note**】 There are two ways to install ihe rear camera:
A.Adsorted on the glass above and behind the car,hands-on self-installation(Reversing visual function can not be achieved,only rea-time recording rear video).
B.To find a professional installation staff installed in the license plate above the camera at the same time need to connect the power reversing lights(Reversingvisual function can be achieved).
- 7.Adjust the lens position to ensure the bestviewingangle
- 8.Startthe engine and check that the machine is operating properly.

Features

- 1.Use the automatie recording function
Start the carengine,the recorder automatically starts to open the recording function.Close the car engine, The recorder automatically saves the contents of the log and shuts down,recorded video segments are stored on the TF card.When the TF eard is full,the recorder will overwite the oldest recorded image preferentially.
【**Note**】
a.Time segmentof record can be set 1/2/3minutes in the menu
b.The video individually saved in the folder named "DCIMA" and "DCIMB" in TF card (package include rear view lens),
- 3.Use motian detection
In standby mode,enter the menu screen open the motion detection mode,When the lens is sensitive to the peripheral area of a moving object,the state machine into the camera,recording 30 seconds ater the system stops recording.To exit the motion detection mode,in standby mode to enter the menu screen close motion detection mode.
- 4.G-sensor
The built-in gravity sansor (G-sensor),if serious vehicle collision,the recorder will lock the first 5 seconds and 10 seconds after the image date when the accident occurred while the bottom left of the display screen displays a lock icon Jocked images will be saved as a special file,the file will not be overwritten cycle.

(note)Gravity sensor (G-Sensor)sensitivity adjustment support may actually need to change setting in the setup menu according to their image.

5.The device has a key lock feature that will need to retain an image without being locked loop overwritten In the video mode,short press 【**M**】 key togger will then lock the entire video image.

6.In shooting mode,Press the 【**M**】 key to enter the menu setting,find thedate,time menu,short press the 【**OK**】 button to confirm and return to the setup menu settings,press the 【**M**】 key to exit the menu setting. 【**Note**】 In order to effectively record the date and time traffic safety accident forensics,before using the menu setting.

7.File playback
In the playback mode,press the (OK)key to play backTo exit playback mode,press MODE button again.

8.Reversing visual function
First,you must connect the dv with car charger.rear-view camera connect the reversing lights.Insert the car charger,machine will automatically start recording status,screen switch R position in the recording mode automatically switches to the rear-view camera,display reverse image.After reversing visual machine automatically return to video mode.
Reminder:Please test the rearview camera is normal before installation.

9.Parking monitor(To achieve unattended surveillance video)
To achieve this function must be connected to the machine in the case of electricity,in the main menu to open the motion detection and parking monitoring function,in the standby state of the vehicle under vibration or moving objects in front,the recorder according to G-se nsor to sense automaticallly start the machine and automaticlly locks the video for 30 seconds,and automaticallly save the video file,the video 30 seconds after 5 seconds without the operation will automatically shut down.
【**Note**】 This function is only used when stopping.Please turn off the motion detection and stop monitoring function during normal driving.

FAQ	
Machine appears"file error" message	Settings menu->Restore factory setings and format thememory card, the general problem is TF card
The screenappears horizontal stripes interference	Please select the correct power supply frequency 50HZ(PAL)
How to properly turn on the 24-hourparking mcnitoring function	While in roadmdd driving,please do not open,it is easily lead to automatic shutdown or crash,after parking is required to open,configure the buck line or mobile power please
Night shootingscreen is not clear enough	Recorder shooting depends on the outside strong light source(Such as streetlights or car light)
The machine always reverts to the default date and time	Shutdown in the first case full of alacrity,you can use car charger or mobile power supply to add power
what is the reason for video file leak seconds	(Turn off metion detection/Turn on the loop recording function)With a certain choice of their own genuine card C10 high-speed card
Way during recording the machine automatically shut down suddenly	Please tur off the parking monitoring function first/Ambient temperature exceeds 70°C will cause automate shutdown
【 Note 】 Practice proof	Most of the problems sources from the memory card, a small part cause of power cord

The information provided in this manual is for reference only.Please prevail in kind(some special features depend on different models).All rights reserved.





User manual



- 1. App download and installation:**
1.1 scan the QR code on the cover. After installation, click to enter "6 frame probe", as shown in the following figure:



2. Add device

iPhone: enter the system WiFi, select the recorder WiFi, enter the WiFi password (the default password is 12345678), connect, enter the "6-Frame probe" app and complete the addition;

Android mobile phone: enter the "6-Frame probe" app, click "add recorder", enter the system WiFi interface according to the addition wizard, select the recorder WiFi, enter the WiFi password (the default password is 12345678), and connect. After the connection is completed, click "return" to complete the addition;




3. App function introduction




1. Recorder: this page manages the recorder. You can add, view and delete the recorder, and enter the video preview interface of the recorder;
2. Photo Album: manage the pictures and videos downloaded from the recorder to the mobile phone;
3. More: app language settings, problem feedback, about and other information;

4. Function introduction of recorder




- 1 photographing: operate the recorder to take a picture, and then save the picture on the recorder;
- 2 zoom: enter the full video screen or exit the full video screen;
- 3 recorder files: enter the file list on the recorder and classify it according to circular

video, photo files, emergency events and parking monitoring events;
4 recorder setting: enter the recorder setting interface to set the recording resolution and microphone switch;
4.1 recorder file download
Click "recorder file" to enter the file list interface, click "select" button, select the picture or video to be downloaded, click "download" to start downloading the file. After downloading, the file is saved on the mobile phone and can be viewed through "photo album";



4.2 recorder file playback

Click "recorder file" to enter the file list interface. Instead of downloading, you can directly play the video on the recorder and take photos of the current playing picture of the video;



Download: download the video to the mobile phone;
Take pictures: take pictures of the currently playing pictures and save them to the mobile phone;

5. Photo album


Enter the "photo album" to manage the pictures or videos downloaded to the mobile phone. Click "all" to enter the full list of videos in this category. The file list is arranged by date. Click "select" to select multiple files for operation;



Video: all video files;
Pictures: all picture files;
Emergency: documents of collision induction;
6. Video playback

A variety of operations can be performed on the pictures or videos in the "album", as shown below:

When playing the video in the "recorder file" or the video in the "photo album", you can choose to play at multiple speeds to quickly browse the video content or play the key video segments at a slow speed, such as "1 second 1 frame" or "10x (10 times speed)";



7. Document editing

Select the file in the "photo album" and select Edit to enter the editing interface, which supports image clipping and filter beautification; supports video clipping, music addition and other operations;



FCC Warning

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE 1: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

NOTE 2: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

RF Exposure Statement

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum distance of 20cm between the radiator and your body. This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter.