




AC8XX Series Smart Host

Quick Start Guide

AC801

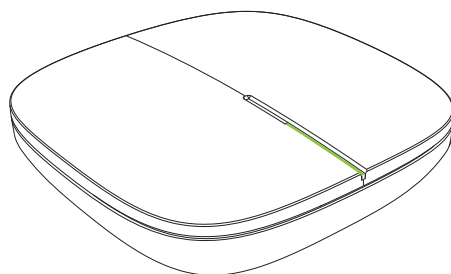

AC8XX Series Smart Host Parameters



Max. 30 motors

Max. 50 scenes

OTA Firmware Update

Max. 30 timers

Radio+

0 °C ~40 °C

Max. 20 Rooms

5V 1A(Type-C)

2.4GHz Wi-Fi, 433.92MHz

RoHS CE FCC

RS485(RJ11)

Bluetooth Connection

Preparation Stage


Smartphone connection 2.4G WiFi
Download App and Register Your Account




or



1. Match the AC8XX Series Smart Host

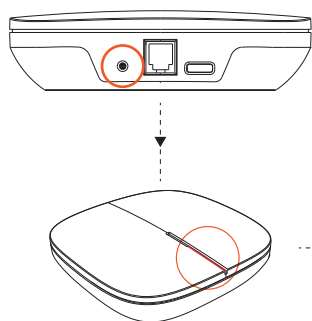

The wifi bridge is powered on
Press and hold the tail matching button for 2 seconds
Red light flash in matching mode

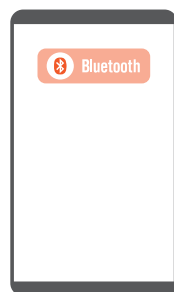


①

Turn on the Bluetooth
on your phone




②

Open the app
Click the + icon in the upper right corner,
and select "Add device".

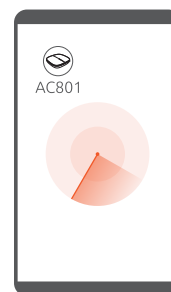


③

The wifi bridge will
automatically scan and
connect to the device.

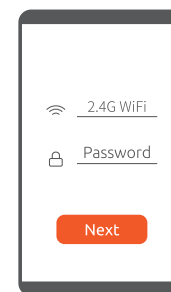


④

Keep the phone connected with wifi,
enter the wifi password and click "Next"
(Operate according to the guidance)

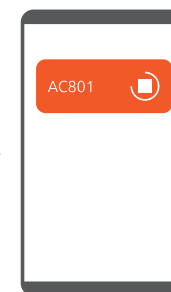

⑤


Wait for the connection
to complete.

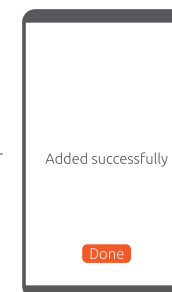

⑥


After adding successfully,
Click "Done" to exit the interface.
(The wifi bridge unit's green
indicator light will stay on steadily.)

2. AC8XX Series Smart Host Connection Smart Blinds

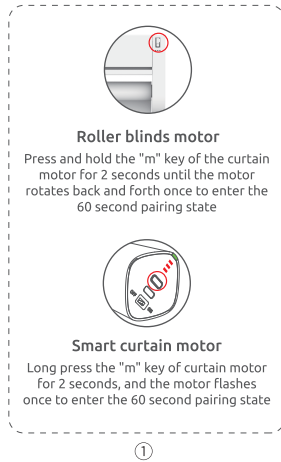


Enter the WiFi bridge control interface "Add subdevice"

A maximum of 30 devices can be added to a WiFi bridge, repeat the above steps to add

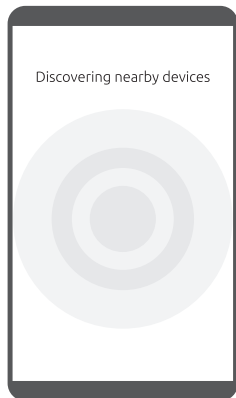

Click "LED already blink", WiFi bridge is in search state

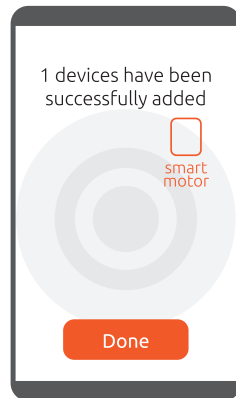


Wait for a moment, and the Searched device will be displayed On the interface. Click "Done"

1. Single motor system, adding one device at a time
2. Dual motor system, adding two devices at a time


3. Smart Blinds Setting

App

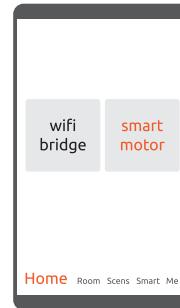


In the app interface "Home", click the corresponding Smart curtain to enter the curtain control interface

Control Interface

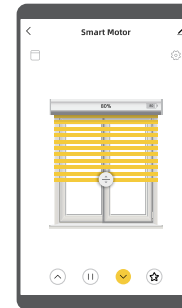

Control Interface

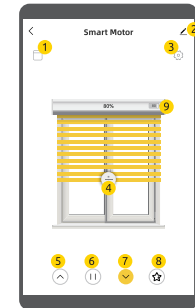


- 1 Select The Corresponding Curtain Type
- 2 Modify curtain name
- 3 Set up
- 4 Drag to control curtain opening and closing
- 5 Open the curtains
- 6 Stop
- 7 Close the curtains
- 8 Run to the third travel point
- 9 Battery Power

Please Control The Curtain After The Curtain Type and Travel Are Set

Click 1 Select The Corresponding Curtain Type
Click 2 Enter The Setting Interface

Setting Interface

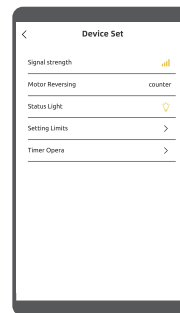

Signal Strength
Displays the signal strength of the Wifi Bridge currently connected

Motor Reversing
Change the rotation direction of the motor

Status Light
On / off status indicator (available for some models)


Setting Limits
① Set the position when the curtain is fully open;
② Set the position when the curtain is fully closed;
③ Custom curtain position (third),
You can run to this position with one key.

Timer Opera
Add timing function to automatically open / close the curtain

After Setting, Return To The Control Interface

Intelligent Speaker

At present, it displays the platforms that have been supported. Other third-party platforms need the platform to connect with the TUYA.

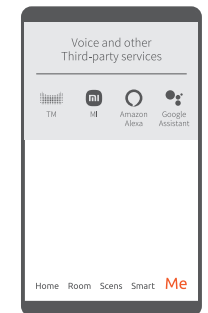

In the app interface "Me", click the corresponding Smart speaker and connect the third-party Smart speaker according to the prompt.

FCC Caution:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC 's RF Exposure guidelines, This equipment should be installed and operated with minimum distance between 20cm the radiator your body:
Use only the supplied antenna.