



banTamp xL

用户使用说明

www.joyoaudio.com

www.joyoaudio.com

banTamp xL

User Manual



JOYO
FEEL JOYO ENJOY MUSIC

Safety instructions

Thank you for purchasing our products!

Important safety instructions



CAUTION: TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE COVER (OR BACK). NO USER-SERVICEABLE PARTS INSIDE. REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.

WARNING: TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS APPARATUS TO RAIN OR MOISTURE.



The lightning flash with arrowhead symbol within an equilateral triangle is intended to alert the user to the presence of uninsulated “dangerous voltage” within the product’s enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the product.



This symbol is intended to alert the user--- Use only with the cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.



User instructions: After you turn on the banTamp xL, the tube warms up for the first 20-30 seconds, the unstable sound during this period is normal.


-1-

Detailed safety instructions

- For your safety and let you be familiar with this product, please read all the safety and operation instructions before use.
- Please keep this user manual for future use and maintenance.
- Please follow all the safety instructions on the product or in the user manual.
- Use the attached power adapter only. If use other power adapter, it will damage the internal circuits or increase noise.
- Keep it away from children!
- Please install this product according to manufacturer’s instructions. Put it in places that have good ventilation and heat dissipation. Don’t block any ventilation openings nor cover it with cloth and the like.
- Don’t use it near water or damp areas, don’t drop water or other liquid substance into this product;
- Don’t use it near heat sources, such as heater, electrothermal oven, high power amplifier and more.
- Don’t put hazardous chemicals on the product, inflammable and explosive substances such as alcohol, thinner and so on.
- Do not use alcohol or other cleaning fluids to clean this product, otherwise it will damage the surface, use a clean dry cloth when necessary.
- Don’t damage the power cord or plug. Don’t pull the power cord and other parts. Please unplug it if you need to move this product.
- Please turn off the power switch and unplug the AC power socket during thunderstorm, lightning or if it is not in use for a long time.
- Should any of the following occur, please switch it off and unplug it and contact your local distributor or have it repaired by qualified personnel.
 - 1) Metal or other solid object or liquid falls into the cabinet, or gets caught in the rain.
 - 2) The power cord or power plug were damaged, cable core are exposed or wire break.
 - 3) The product is in smoke, peculiar smell or other abnormal condition.
 - 4) The product falls on the ground or malfunctions.


-2-

Panel instruction

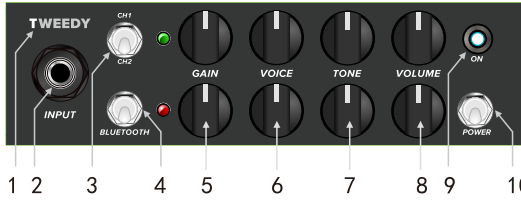

Front panel

- 1.Head’s Model.
- 2.Guitar Input.
- 3.Channel Switch:for choosing the channel.
- 4.Bluetooth Switch: for turning on/off banTamp xL’s Bluetooth function.
- 5.Gain Knob: adjust the Gain.
- 6.Voice Knob:adjust the frequency response&distortion characteristics, you can adjust the tone together with the GAIN.
7. Tone Knob: adjust the tone brightness.
- 8.Volume Knob: adjust the volume.
- 9.Power/Bluetooth indicator: turn on banTamp xL, the indicator becomes red, then turn on Bluetooth switch, the indicator changes from red to blue.
- 10.Power Switch: turn on/off banTamp xL..

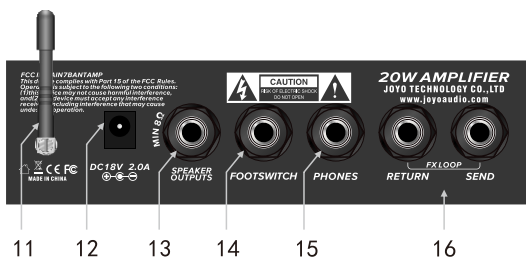

Rear panel


- 11.Bluetooth Antenna
- 12.Power Interface: connects to DC 18V/2.0A power adapter for power supply, make sure to use the attached power adapter.
- 13.Speaker Output: please connect with speaker impedance that is 8Ω or more than 8Ω!
- Important notes: when connected with speaker impedance that is more than 8Ω, banTamp xL’s power will be reduced.
- 14.Channel-switching Footswitch pedal’s Jack
- 15.Headphone Output: the amp becomes mute when it connects to headphones.
- 16.FX LOOP: connects effect pedal input to banTamp xL’s SEND Jack, and connects effect pedal output to banTamp xL’s RETURN Jack.

-3-

Connection


Bluetooth connection

- 1)Turn on the Bluetooth slide switch.
- 2)Its power indicator changes from red to blue.
- 3)Switch on the Bluetooth of your equipment, wait for it to locate banTamp xL. Please note that the names located are according to different models you have bought, the names are on the upper side of banTamp xL’s input jack as shown in the picture, for example, “TWEEDY” .
- 4)Click the related device and match.

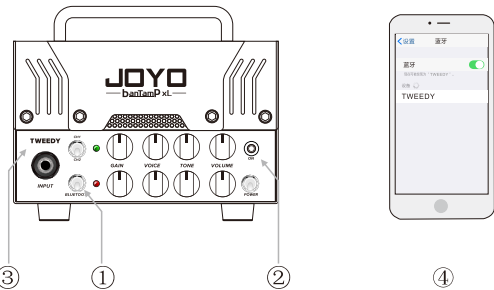

Cabinet impedance matching

The matched speaker impedance is 8Ω, of course, 16Ω works too, but banTamp xL achieves maximum power output only when speaker impedance is 8Ω. While with 16Ω, banTamp xL’s power reduces.

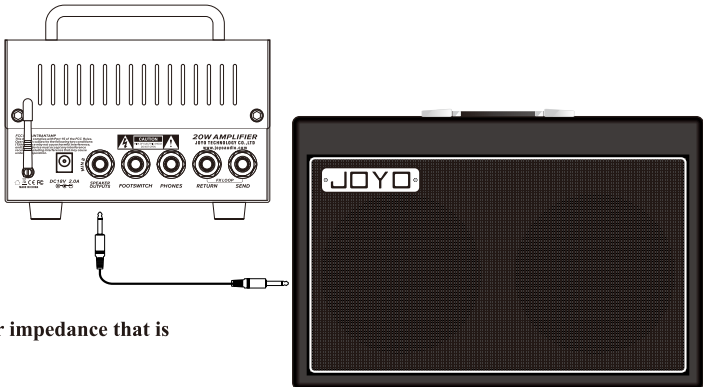

Warning: Please don’t connect with speaker impedance that is less than 8Ω!

-4-

Specifications:

Power adapter: INPUT AC 100-240V 50/60Hz OUTPUT DC18V/2.0A
Rated power:20W/8Ω
Speaker Impedance:8Ω
Bluetooth version:5.1
Headphone impedance: 16 - 48Ω
Dimension:163mm × 110mm × 140mm
Weight:1300g

Package content:

- banTamp xL x1
- Power adapter x1
- Owner's manual x1
- Power cable x1
- Channel-switching Footswitch Connecting Cable×1
- Channel-switching Footswitch pedal x1
- Speaker cable x1

JOYO TECHNOLOGY CO., LTD

Address: 2/F, Lushi Industry Building, 28th District, Bao'an, Shenzhen, 518101 China.
www.joyo-amps.com Email:info@joyoaudio.com Tel: 0086-755-29765381

JOYO Technology is committed to guarantee the highest quality standards. All Technical Parameters or pictures are only for your information, subject to the actual products.

-5-