



- Model no. : PAS-K01-12
- Ultra Wideband based intelligent proximity alert system
- CAN bus interface with 12/24V external power
- Easy use without a setup
- Detecting functions are unaffected by wind, falling rain or snow, fog, humidity, air temperature, or light
- Tag operates in warehouses, factories, ports, and construction/mining sites as a safety device
- IP65 enclosure withstands harsh environments

● Technical Data

General Specifications

Communication Method	Interface	Max. Detectable Distance	Standard Deviation of Detecting Distance	Weight
UWB	CAN Bus 2.0B	20m	2.9cm (500ms, 20m)	

Ultra Wideband RF Parameter

Method	Conducted Rx Sensitivity	Conducted Tx Power Density	Data Rate
UWB compliant IEEE802.15.4-2011 STD	-93dBm /500MHz (6.8Mbps, PER 1%)	Max -41.3dBm/MHz	6.8Mbps

Electrical Characteristic

Power (Adaptor)	Operating Voltage	Power Consumption
INPUT : 100 – 230VAC 50-60Hz 1.2A OUTPUT : 12VDC 2.5A	DC 12V or 24V	Below 4W

Operating Specifications

Operating Temperature	Storage Temperature	Ingress Protection Rating	Connector
-30~85°C	-40~85°C	IP65	I.P Connector PLUG 6P (M10xP0.5)

● Overview

IPAS - Silent tag creates a mute environment within a certain zone.

Once the silence tag detects a pedestrian tag within the preconfigured range, any pedestrian tag will not be acted by surrounding devices and eventually become silent. Then, the pedestrian tag will re-alert once leaving the zone. The safety zone feature is widely used in small ones inside the warehouse and employees' lounges.

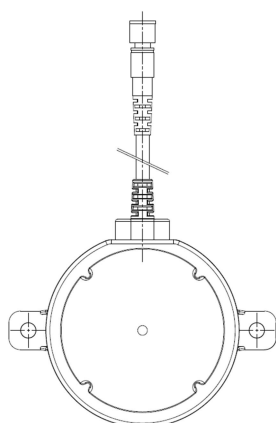


Figure 1. IPAS Silent Tag

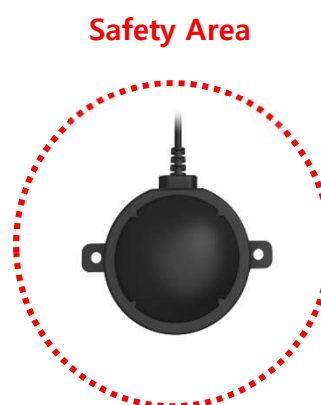


Figure 2. IPAS Silent Tag Detecting Distances

- Configuration : By IPAS Update Tool S/W

Tag	Area	Minimum Distance	Maximum Distance
Silent Tag	A	2m	20m

Configuration

The distance can be calibrated by using IPAS update toolkit software.

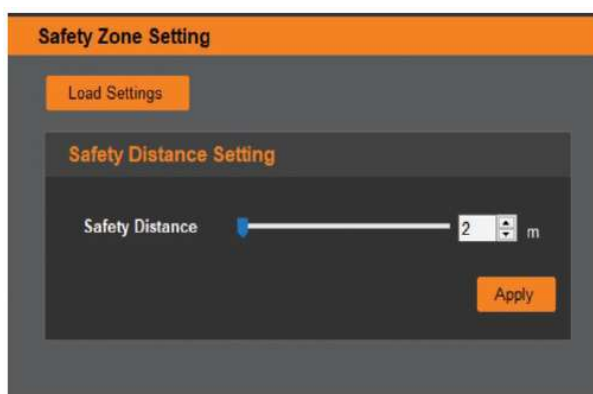


Figure 3. IPAS Silent Tag setting

Specifications

Dimension

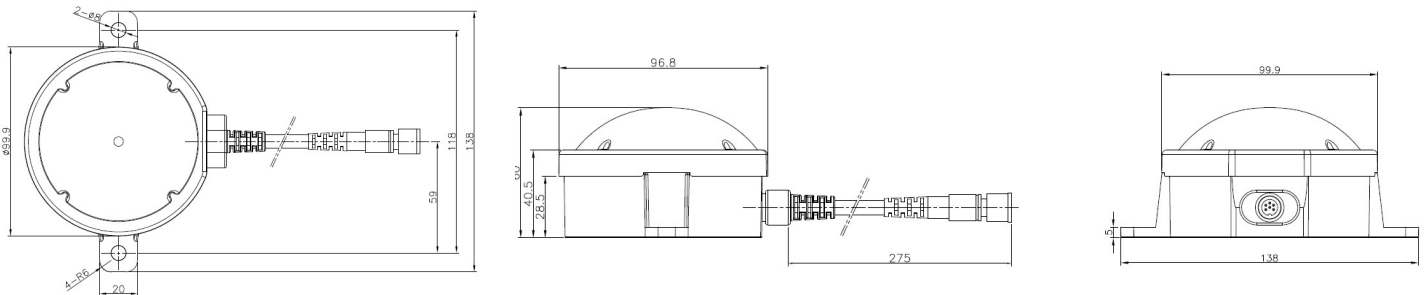


Figure 4. IPAS Silent Tag Detecting Dimension


Connector Specifications



Pin No.	Function	Wire Description	
		Size	Color
P01	+12V	AWG #26	Red
P02	CAN_L		Yellow
P03	CAN_H		Blue
P04	RS232_TX		White
P05	RS232_RX		Green
P06	GND		Black


Products Assembly

Standard

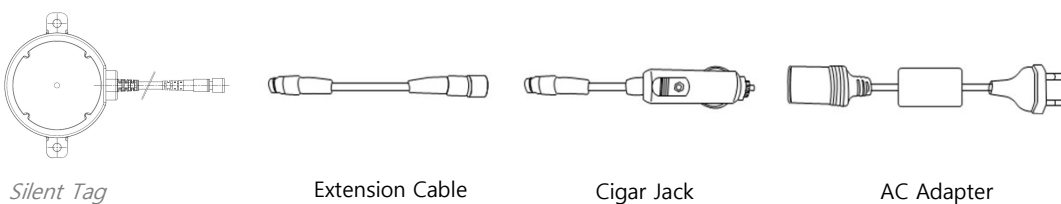

● Accessory


Products



IPAS Extension Cable(6M)



IPAS Cable / Cigar Jack Adapter
(250V 5A Fuse Included)



IPAS Universal AC Adapter

● Certifications



FCC: ZE8-PAS-K01-12-B
R-R-KWO-PAS-K01-12-B

Note:

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications.

Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

"This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation."

The antenna(s) used for this transmitter must not be co-located or operating in conjunction with any other antenna or transmitter, except in accordance with FCC multi-transmitter product procedures.

A minimum separation distance of 20cm must be maintained between the antenna and the person for this appliance to satisfy the RF exposure requirements.

Operation on board an aircraft or a satellite is prohibited. Devices operating under this section may not be employed for the operation of toys. Except for operation onboard a ship or a terrestrial transportation vehicle, the use of a fixed outdoor infrastructure is prohibited.

**CAUTION : Make No Modification to this Product**

Any modifications to this product not expressly approved by Kyungwoo Systech could void the user's authority to operate the product. Contact Kyungwoo Systech for more information.

Kyungwoo Systech, Inc. Limited Warranty

Kyungwoo Systech, Inc. warrants its products to be free from defects in material and workmanship for one year following the date of shipment. Kyungwoo Systech, Inc. will repair or replace, free of charge, any replace, any product of its manufacture which, at the time it is returned to the factory, is found to have been defective during the warranty period. This warranty does not cover damage or liability for misuse, abuse, or the improper application or installation of KIGIS product.

THIS LIMITED WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES WHETHER EXPRESS OR IMPLIED (INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), AND WHETHER ARISING UNDER COURSE OF PERFORMANCE, COURSE OF DEALING OR TRADE USAGE.

This Warranty is exclusive and limited to repair or, at the discretion of Kyungwoo Systech, Inc., replacement. **IN NO EVENT KYUNGWOO SYSTECH INC. BE LIABLE TO BUYER OR ANY OTHER PERSON OR ENTITY FOR ANY EXTRA COSTS, EXPENSES, LOSSES, LOSS OF PROFITS, OR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES RESULTING FROM ANY PRODUCT DEFECT OR FROM THE USE OR INABILITY TO USE THE PRODUCT, WHETHER ARISING IN CONTRACT OR WARRANTY, STATUTE, TORT, STRICT LIABILITY, NEGLIGENCE, OR OTHERWISE.**

Kyungwoo Systech, Inc. reserves the right to change, modify or improve the design of the product without assuming any obligations or liabilities relating to any product previously manufactured by Kyungwoo Systech, Inc. Any misuse, abuse, or improper application or installation of this product or use of the product for personal protection applications when the product is identified as not intended for such purposes will void the product warranty. Any modifications to this product without prior express approval by Kyungwoo Systech, Inc. will void the product warranties. All specifications published in this document are subject to change; Kyungwoo Systech, reserves the right to modify product specifications or update documentation at any time. For the most recent version of any documentation, refer to: www.kyungwoo.com, www.kigistec.com.

항공기, 선박, 위성, 모형비행기에의 적용을 금지함.

These devices may not be employed for the operation of toys. Operation onboard an aircraft, a ship or a satellite is prohibited.

적합성평가를 받은 자의 상호 : (주)경우시스테크

기자재 명칭 : Intelligent Proximity Alert System

기자재의 제조시기 : 별도표기

기자재의 제조자 및 제조국가 : (주)경우시스테크/대한민국