INSTRUCTION SHEET
#368986

Floor Troughs

INSTALLATION INSTRUCTIONS

CAUTION

INSPECT CONTENTS IMMEDIATELY AND FILE CLAIM WITH DELIVERING CARRIER FOR ANY DAMAGE.
SAVE YOUR BOX AND ALL PACKING MATERIALS.
YOU ARE RESPONSIBLE FOR DAMAGE TO YOUR UNIT IF RETURNED IMPROPERLY PACKED.

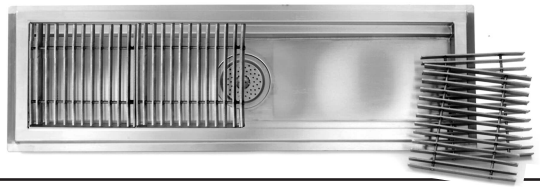

Plumbing Rough-ins

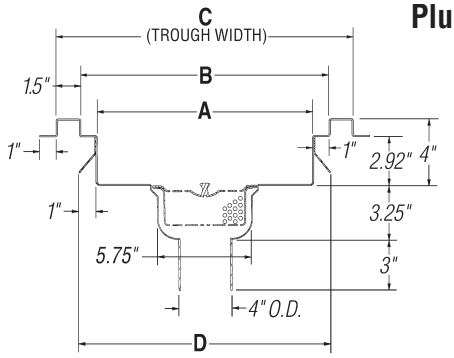

SIDE VIEW

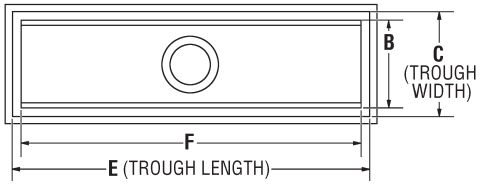

TOP VIEW

*(see chart below for dimensions **A** through **F**)*

12″ (305mm)-WIDE TROUGHS dimension A: 7″ (178mm) dimension B: 9″ (229mm) dimension C: 12″ (305mm) dimension D: 9.25″ (232mm) model #	15″ (381mm)-WIDE TROUGHS dimension A: 10″ (254mm) dimension B: 12″ (305mm) dimension C: 15″ (381mm) dimension D: 12.25″ (311mm) model #	18″ (457mm)-WIDE TROUGHS dimension A: 13″ (330mm) dimension B: 15″ (381mm) dimension C: 18″ (457mm) dimension D: 15.25″ (387mm) model #	24″ (610mm)-WIDE TROUGHS dimension A: 19″ (483mm) dimension B: 21″ (533mm) dimension C: 24″ (610mm) dimension D: 21.25″ (540mm) model #	TROUGH LENGTHS dimension E		dimension F	
				in.	mm	in.	mm
FT-1218-FG	n/a	n/a	n/a	18″	457	15″	381
FT-1224-FG	***FT-1524-FG***	***FT-1824-FG***	***FT-2424-FG***	24″	610	21″	533
FT-1230-FG	***FT-1530-FG***	***FT-1830-FG***	***FT-2430-FG***	30″	762	27″	686
FT-1236-FG	***FT-1536-FG***	***FT-1836-FG***	***FT-2436-FG***	36″	914	33″	838
FT-1248-FG	***FT-1548-FG***	***FT-1848-FG***	***FT-2448-FG***	48″	1219	45″	1143
FT-1260-FG	***FT-1560-FG***	***FT-1860-FG***	***FT-2460-FG***	60″	1524	57″	1448
FT-1272-FG	***FT-1572-FG***	***FT-1872-FG***	***FT-2472-FG***	72″	1829	69″	1753
FT-1284-FG	***FT-1584-FG***	***FT-1884-FG***	***FT-2484-FG***	84″	2134	81″	2057
FT-1296-FG	***FT-1596-FG***	***FT-1896-FG***	***FT-2496-FG***	96″	2438	93″	2362
FT-12120-FG	***FT-15120-FG***	***FT-18120-FG***	***FT-24120-FG***	120″	3048	117″	2972

The above chart indicates troughs with fiberglass grating. For troughs with ADA-approved wide "T" Bar fiberglass grating, add suffix "**-ADA**". Example: FT1224-FG-**ADA**
For troughs with stainless steel grating, replace suffix "**-FG**" with "**-SG**". Example: FT1224-**SG**

- Size of rough-in hole for trough should be as follows:
  Width = "Dimension D"
  Length = "Dimension E"
  Depth = 4¼″
- Size of rough-in hole for drain should be 5⅞″ diameter. Depth, to accommodate plumbing, may vary.
- Place trough in hole.
- Lay finished floor so that it overlaps outer flange on all four sides of trough.
- Lay grating inside trough accordingly.

(End)

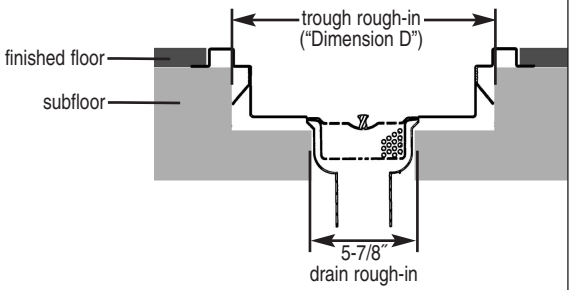

EG10094 Revised 01/15

EAGLE GROUP®
Profit from the Eagle Advantage®

• 100 Industrial Boulevard, Clayton, Delaware 19938-8903 U.S.A. • www.eaglegrp.com
• Phone: 302/653-3000 • (Foodservice) 800/441-8440 • (MHC/Retail) 800/637-5100
• Fax: 302/653-2065

Eagle Foodservice Equipment, Eagle MHC, SpecFAB®, and Retail Display are divisions of Eagle Group. ©2015 by the Eagle Group

Anti-Splash Floor Troughs

INSTALLATION INSTRUCTIONS

CAUTION

INSPECT CONTENTS IMMEDIATELY AND FILE CLAIM WITH DELIVERING CARRIER FOR ANY DAMAGE.
SAVE YOUR BOX AND ALL PACKING MATERIALS.
YOU ARE RESPONSIBLE FOR DAMAGE TO YOUR UNIT IF RETURNED IMPROPERLY PACKED.

Plumbing Rough-ins

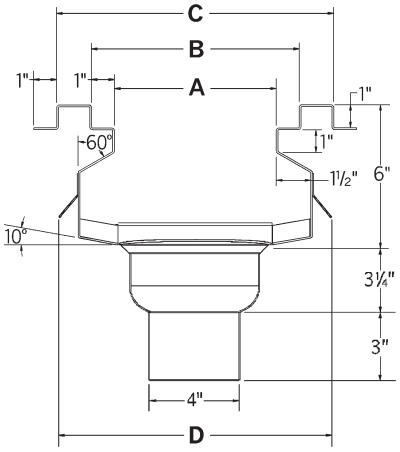

SIDE VIEW

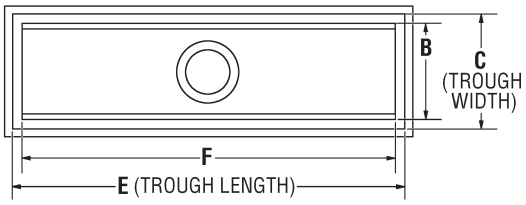

TOP VIEW

*(see chart below for dimensions **A** through **F**)*

12″ (305mm)-WIDE TROUGHS dimension A: 7″ (178mm) dimension B: 9″ (229mm) dimension C: 12″ (305mm) dimension D: 11.25″ (286mm) model #	15″ (381mm)-WIDE TROUGHS dimension A: 10″ (254mm) dimension B: 12″ (305mm) dimension C: 15″ (381mm) dimension D: 14.25″ (362mm) model #	18″ (457mm)-WIDE TROUGHS dimension A: 13″ (330mm) dimension B: 15″ (381mm) dimension C: 18″ (457mm) dimension D: 17.25″ (438mm) model #	24″ (610mm)-WIDE TROUGHS dimension A: 19″ (483mm) dimension B: 21″ (533mm) dimension C: 24″ (610mm) dimension D: 23.25″ (591mm) model #	TROUGH LENGTHS dimension E in.	mm	dimension F in.	mm
ASFT-1218-FG	n/a	n/a	n/a	18″	457	15″	381
ASFT-1224-FG	***ASFT-1524-FG***	***ASFT-1824-FG***	***ASFT-2424-FG***	24″	610	21″	533
ASFT-1230-FG	***ASFT-1530-FG***	***ASFT-1830-FG***	***ASFT-2430-FG***	30″	762	27″	686
ASFT-1236-FG	***ASFT-1536-FG***	***ASFT-1836-FG***	***ASFT-2436-FG***	36″	914	33″	838
ASFT-1248-FG	***ASFT-1548-FG***	***ASFT-1848-FG***	***ASFT-2448-FG***	48″	1219	45″	1143
ASFT-1260-FG	***ASFT-1560-FG***	***ASFT-1860-FG***	***ASFT-2460-FG***	60″	1524	57″	1448
ASFT-1272-FG	***ASFT-1572-FG***	***ASFT-1872-FG***	***ASFT-2472-FG***	72″	1829	69″	1753
ASFT-1284-FG	***ASFT-1584-FG***	***ASFT-1884-FG***	***ASFT-2484-FG***	84″	2134	81″	2057
ASFT-1296-FG	***ASFT-1596-FG***	***ASFT-1896-FG***	***ASFT-2496-FG***	96″	2438	93″	2362
ASFT-12120-FG	***ASFT-15120-FG***	***ASFT-18120-FG***	***ASFT-24120-FG***	120″	3048	117″	2972

The above chart indicates troughs with fiberglass grating. For troughs with ADA-approved wide "T" Bar fiberglass grating, add suffix "**-ADA**". Example: ASFT1224-FG**-ADA**
For troughs with stainless steel grating, replace suffix "**-FG**" with "**-SG**". Example: ASFT1224-**SG**

- Size of rough-in hole for trough should be as follows:
  Width = "Dimension D"
  Length = "Dimension E"
  Depth = 6¼″
- Size of rough-in hole for drain should be 5⅞″ diameter. Depth, to accommodate plumbing, may vary.
- Place trough in hole.
- Lay finished floor so that it overlaps outer flange on all four sides of trough.
- Lay grating inside trough accordingly.

(End)

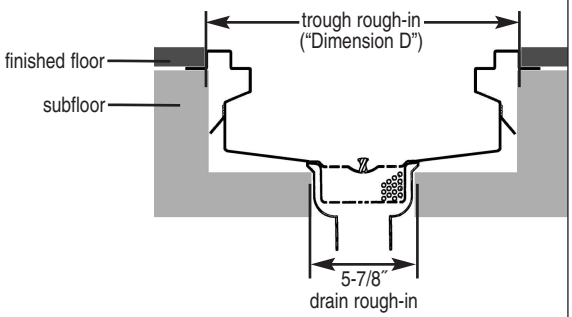

EAGLE GROUP®
Profit from the Eagle Advantage®

• 100 Industrial Boulevard, Clayton, Delaware 19938-8903 U.S.A. • www.eaglegrp.com
• Phone: 302/653-3000 • (Foodservice) 800/441-8440 • (MHC/Retail) 800/637-5100
• Fax: 302/653-2065

Eagle Foodservice Equipment, Eagle MHC, SpecFAB®, and Retail Display are divisions of Eagle Group. ©2015 by the Eagle Group