


WORKPRO

OPERATOR'S MANUAL

50 IN. 2-TIER HEAVY DUTY GARAGE STORAGE RACK WORK STATION KIT

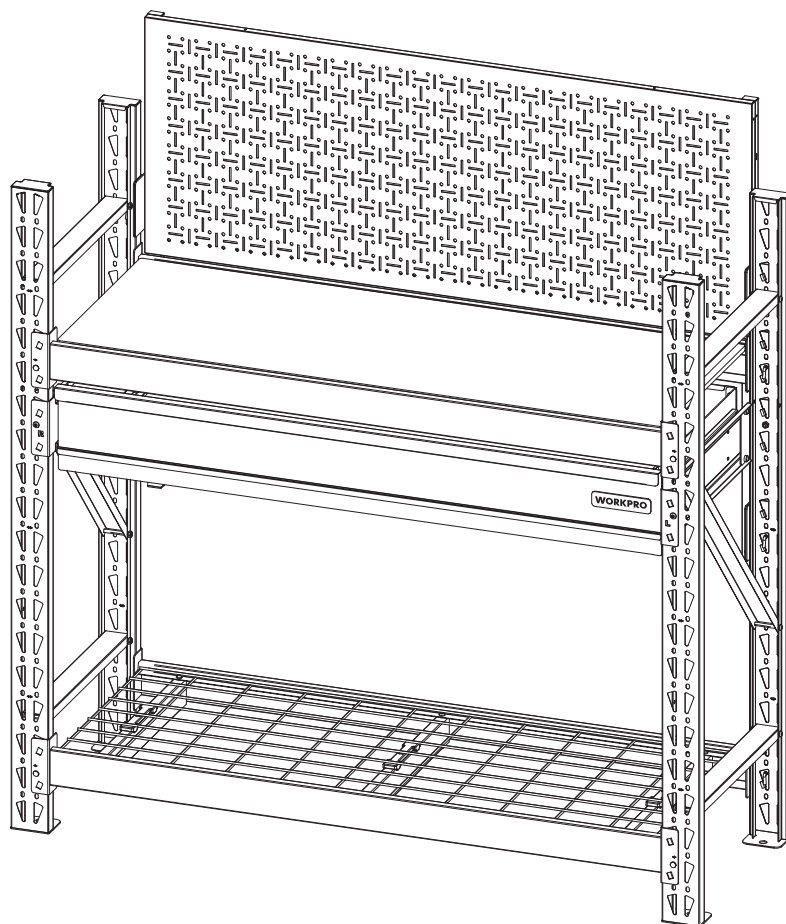

USE PRECAUTION
For your safety



**INSTRUCTION
MANUAL**
Read and understand



EYE PROTECTION
Must be worn



PROTECTIVE GLOVES
Must be worn when
assembly



CAUTION: Read and follow all Safety Rules and Operating instructions before first use of this product.
NOTE: Ensure all components are present. If any components are missing, do not proceed with assembly. Please send an email to service@greatstartools.com or call 877- 876-7562.

SAVE THIS MANUAL FOR FUTURE REFERENCE



Distributed by:
GREATSTAR Industrial USA, LLC
9836 Northcross Center Court, Suite A,
Huntersville NC 28078, USA
www.greatstartools.com
MADE IN CAMBODIA

TABLE OF CONTENTS

Safety Information	2
Specifications	3
Package Contents	3-4
Assembly	5-21
Maintenance	21
Customer Service	21

FOR YOUR SAFETY: CAREFULLY READ AND UNDERSTAND ALL INSTRUCTIONS BEFORE USE.

SAFETY INFORMATION

To reduce the risk of serious injury, read and follow the safety instructions below before assembling and using this product.

CAUTION!

- Do not exceed the entire unit of evenly distributed weight. Be aware of dynamic loading! Sudden load movement may briefly create excess load causing product failure.
- Use only on flat, level and hard surface capable of supporting the rack unit and any items placed on it.
- Maintain proper footing and balance at all times.
- Keep bystanders out of the area during assembly.
- This product is not a toy. Do not allow children to play with, on or near the unit during installation.
- To prevent tipping, always secure to a wall with suitable fasteners.
- Use two or more people to assemble and move the unit to avoid injury.

WARNING!

- DO NOT CLIMB, STAND OR USE THIS UNIT AS A LADDER.
- DO NOT MOUNT CASTERS TO THIS UNIT.
- DO NOT USE THIS UNIT TO STORE AQUARIUMS.
- Use care when handling and assembling metal plates.
- The metal may have sharp edges or corners. The use of protective gloves is recommended.
- Always remember to use proper lifting techniques when moving the boxed or assembled unit.
- Do not alter this product in any manners. This may cause personal injury or product damage.

WARNING!-TIPPING


- Injury may result from tipping rack unit.
- It is imperative to use the included anti-tip hardware kit for safety.
- The tipping restraint is intended only as a safety measure, it is not a substitute for proper adult supervision.
- This tipping restraint is not an earthquake restraint. If you wish to add the extra security of earthquake restraints, they must be purchased and installed separately.
- **DO NOT allow children to climb on the rack unit.**
- Failure to detach this restraint before moving shelves may result in injury and damage.

SPECIFICATIONS

Maximum Load Capacity of Table Top (evenly distributed)	1500 lbs
Maximum Load Capacity of Bottom (evenly distributed)	1500 lbs
Maximum Load Capacity of Pegboard (evenly distributed)	100 lbs







PACKAGE CONTENTS

Ensure all components are present. If any components are missing, do not proceed with assembly. Please send an email to service@greatstartools.com or call 877- 876-7562.

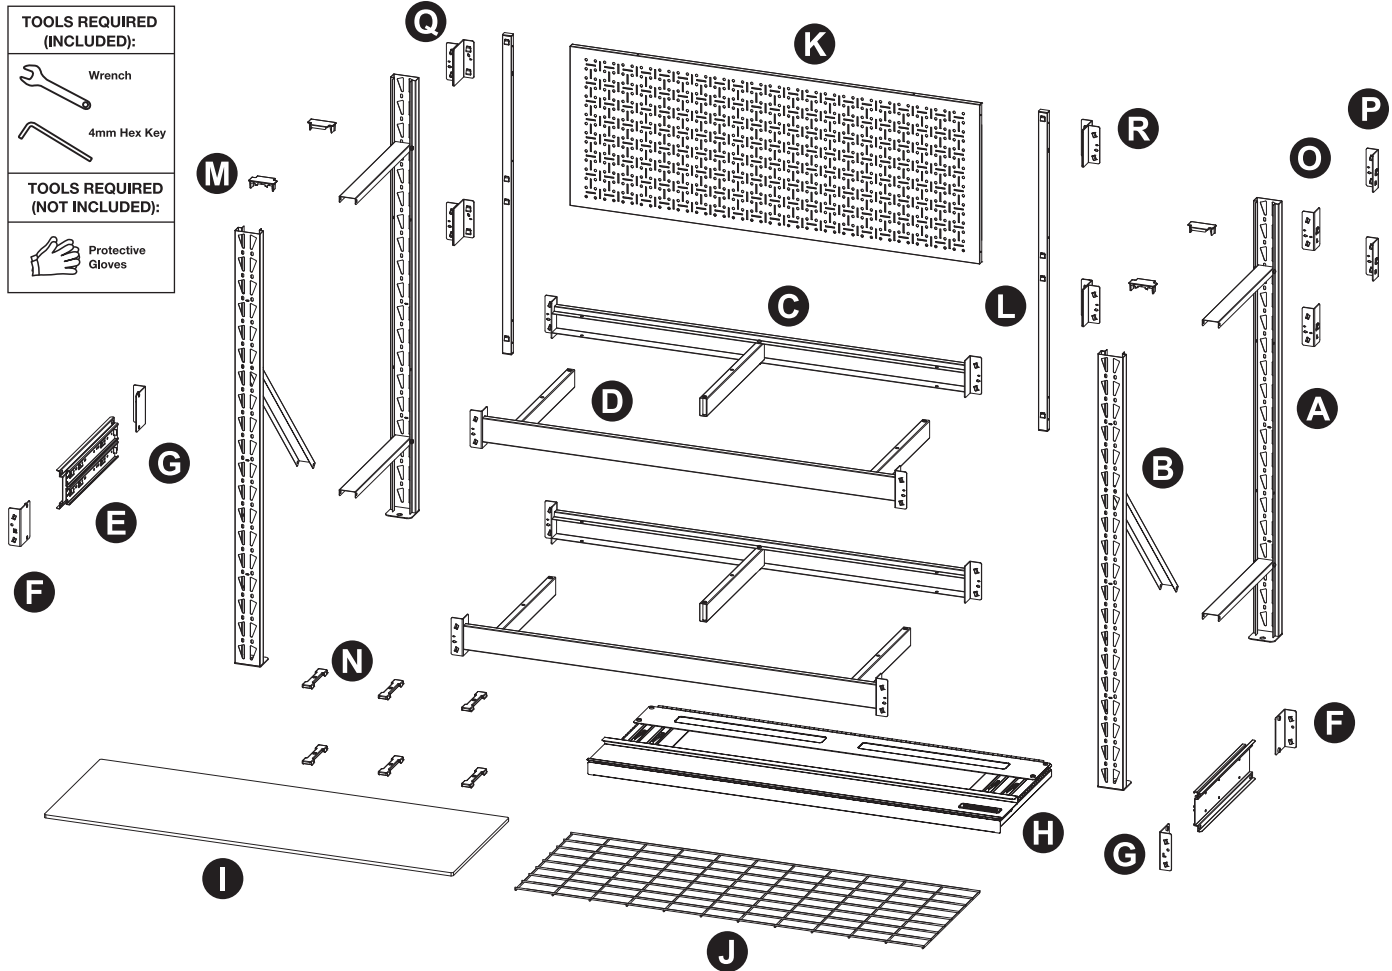

PART	PICTURE	DESCRIPTION	QTY
A		Post with Two Horizontal Braces Pre-assembled	2
B		Post with a Diagonal Brace Pre-assembled	2
C		Beam with a Shelf Support Pre-assembled	2
D		Beam with Two Shelf Supports Pre-assembled	2

PACKAGE CONTENTS

PART	PICTURE	DESCRIPTION		QTY
E		Drawer Slide Panel		2
F		Mounting Bracket for Drawer Slide Panel (R)		2
G		Mounting Bracket for Drawer Slide Panel (L)		2
H		Drawer		1
I		MDF Table Top		1
J		Wire Shelf		1
K		Pegboard		1
L		Vertical Support		2
M		Top Protective Cover		4
N		Shelf Pad		6
O		Side Mounting Bracket (Left)		2
P		Side Mounting Bracket (Right)		2
Q		Rear Mounting Bracket (Left)		2
R		Rear Mounting Bracket (Right)		2
S1		Anti-tip Hardware Kit	Bracket	1 set
S2			Steel Cable	
S3			Wood Screw	
AA		M6x55mm Bolt		6+1(Spare)
BB		Quick Release Pin		6+1(Spare)
CC		M6 x 10mm Bolt		20+1(Spare)
DD		M6 Nut		10+1(Spare)
EE		Pin		16

ASSEMBLY

i NOTE:


- Assemble on a flat surface. A piece of cardboard is recommended to keep the product from being scratched during assembly.
- Two people are recommended for assembly.

STEP 1: ASSEMBLY THE POST FRAME

i NOTE:

- For ease of assembly, two posts (A) feature pre-bolted two horizontal braces, and another two posts (B) feature pre-bolted a diagonal brace.

- Place one post with two horizontal braces pre-assembled (A) and one post with a diagonal brace pre-assembled (B) on the floor, parallel to one another (about 18"/45.7cm apart). **The narrow end of the teardrop-shaped slots on each post should be facing down.**
- Take the free end of diagonal brace out from the post (B), and insert it into the post with two horizontal braces pre-assembled (A). Align the holes, then attach them and tighten with a M6 x 55mm bolt (AA) and a M6 nut (CC) by a supplied wrench and 4mm hex key.
- Swing out the bottom horizontal brace and top horizontal brace of the post (A), and insert them into the post with a diagonal brace pre-assembled (B). Align the holes, then attach them and tighten with two M6 x 55mm bolts (AA) and two M6 nuts (CC) by a wrench and 4mm hex key.
- Repeat above steps to assemble the other post frame (A&B).

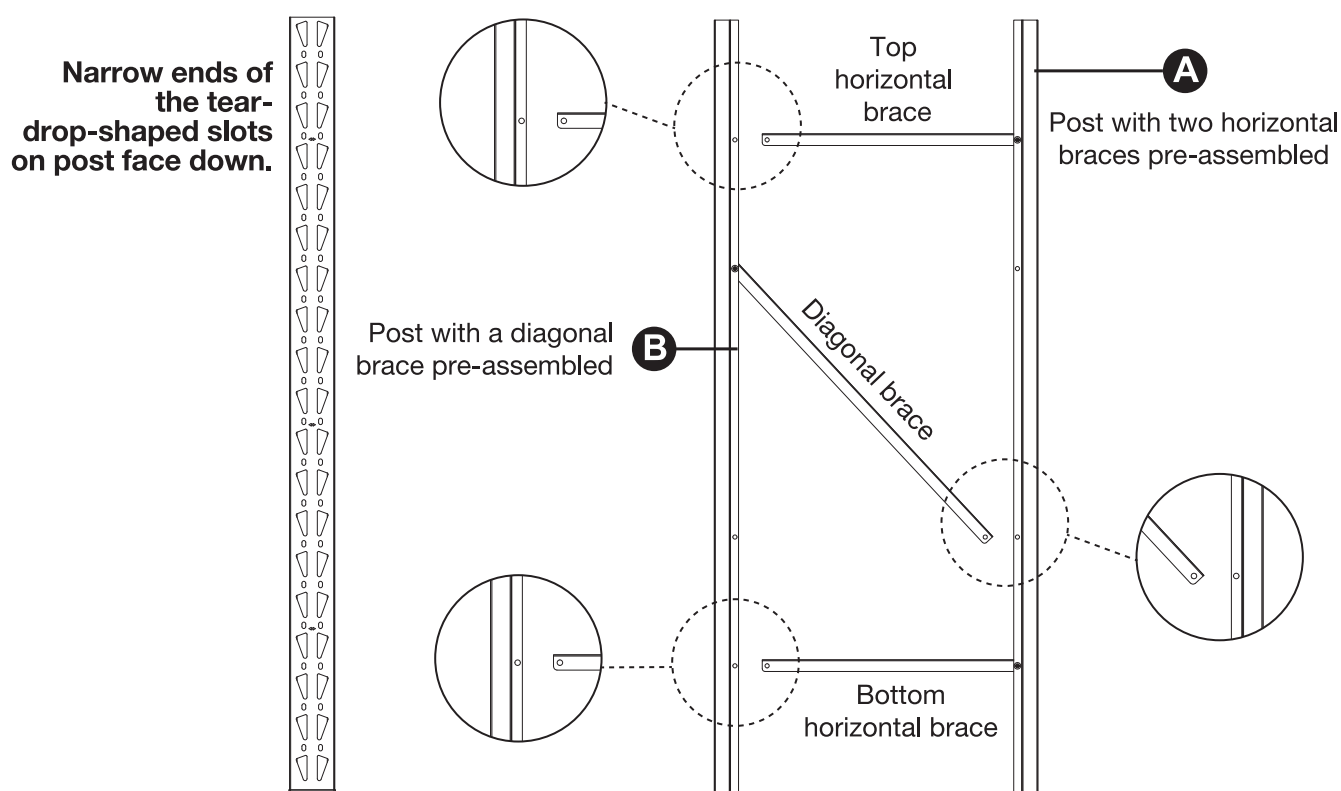


PART	A	B	AA	DD
DESCRIPTION	Post with two horizontal braces pre-assembled	Post with a diagonal brace pre-assembled	M6 x 55mm Bolt	M6 Nut
QTY	2	2	6	6

ASSEMBLY

STEP 2: INSTALL THE BEAMS FOR FIRST LEVEL

NOTE:

- It is recommended for one person to hold the upright frames in place while a second person installs the beams.
- Position the two post frames vertical with the foot end of each frame at ground level. There is a set of locking tabs at both ends of every beam.
- Slide properly the locking tabs of beam with two shelf supports pre-assembled (D) into two slots of the post frames with the **narrow end of the teardrop-shaped slots facing down**. Tap downward lightly to seat tabs. Make sure the end of the beam (D) is flush against the upright post frame. The first level assembly could be installed into the second and third teardrop-shaped slots at the bottom of posts.
- Repeat the above step to install the other beam with a shelf support pre-assembled (C).

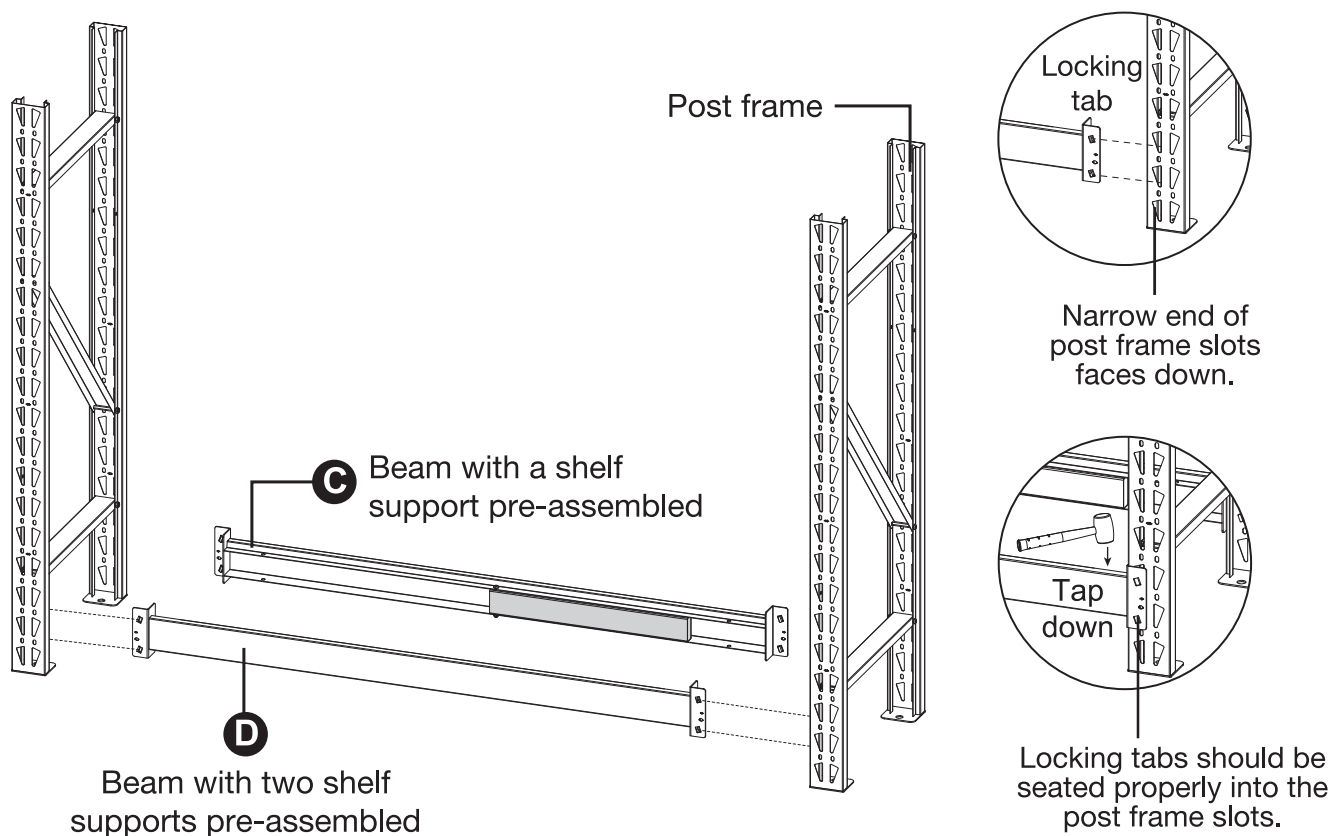


PART	C	D
DESCRIPTION	Beam with a Shelf Support Pre-assembled	Beam with Two Shelf Supports Pre-assembled
QTY	1	1

ASSEMBLY

STEP 3: INSTALL THE SHELF SUPPORT

- Swing out the shelf supports of the beams (C&D) in sequence as the figure shows, and insert them into the beams (C&D). Align the holes, then attach them with three quick release pin (BB).

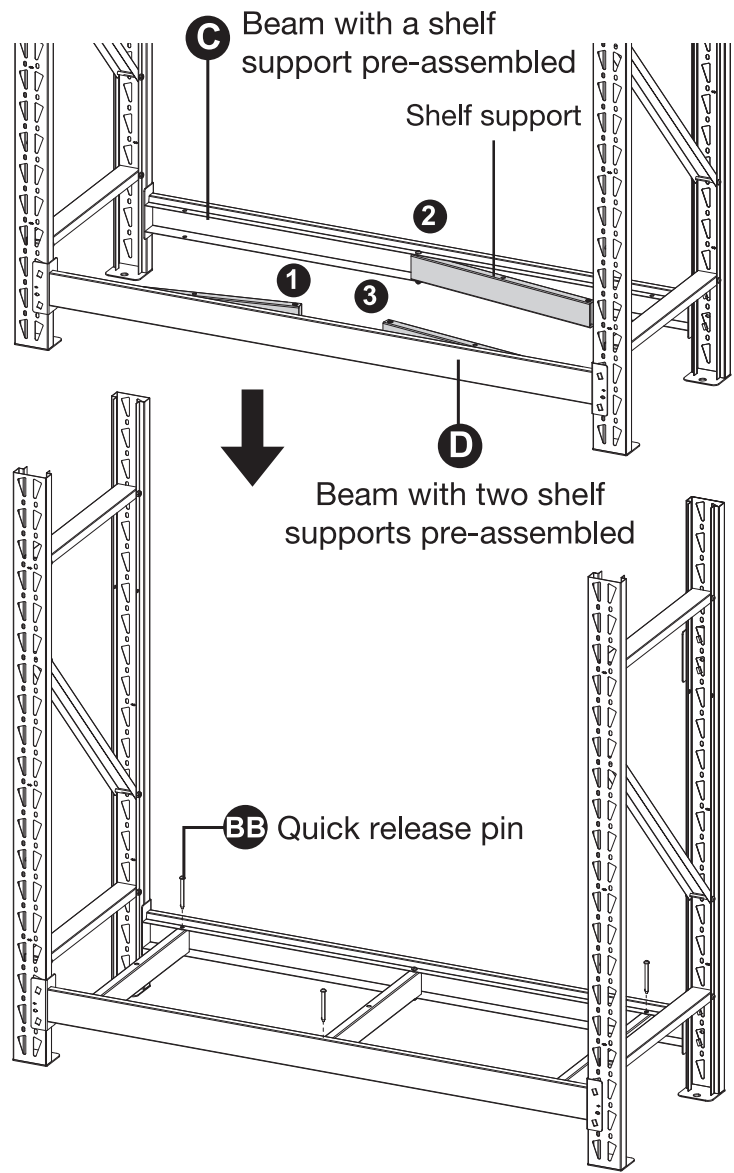


PART	BB
DESCRIPTION	Quick release pin
QTY	3

ASSEMBLY

STEP 4: INSTALL THE BEAMS AND SHELF SUPPORTS FOR SECOND LEVEL

- Repeat the previous step 2-3 to install the second level. The second level assembly could be installed into the fifth and sixth teardrop-shaped slots of posts from top to bottom.

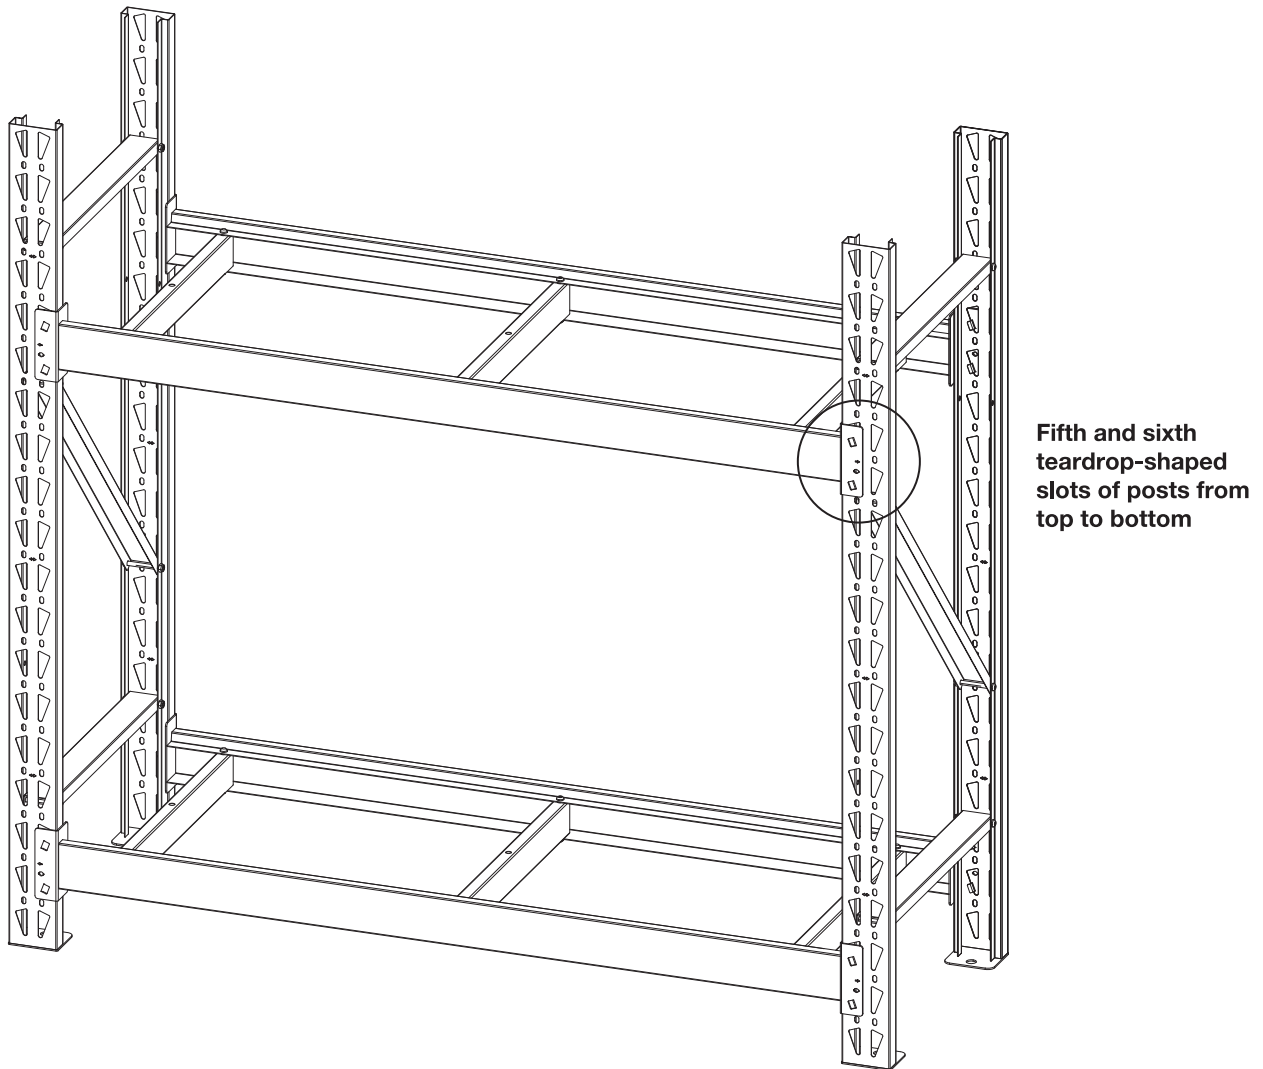


PART	C	D	BB
DESCRIPTION	Beam with a Shelf Support Pre-assembled	Beam with Two Shelf Supports Pre-assembled	Quick release pin
QTY	1	1	3

ASSEMBLY

STEP 5: ASSEMBLY THE DRAWER SLIDE PANEL AND MOUNTING BRACKET

- Identify the mounting bracket (F&G) for drawer slide panel (E). The mounting bracket for drawer slide panel has symbol "L" or "R".
- Pull out drawer slides on the drawer slide panel, then attach the mounting bracket (F&G) to the drawer slide panel (E) with four M6x10mm bolts (CC) as the figure shows. Do not tighten the bolts completely.
- Repeat the above step to install the other drawer slide panel frame.

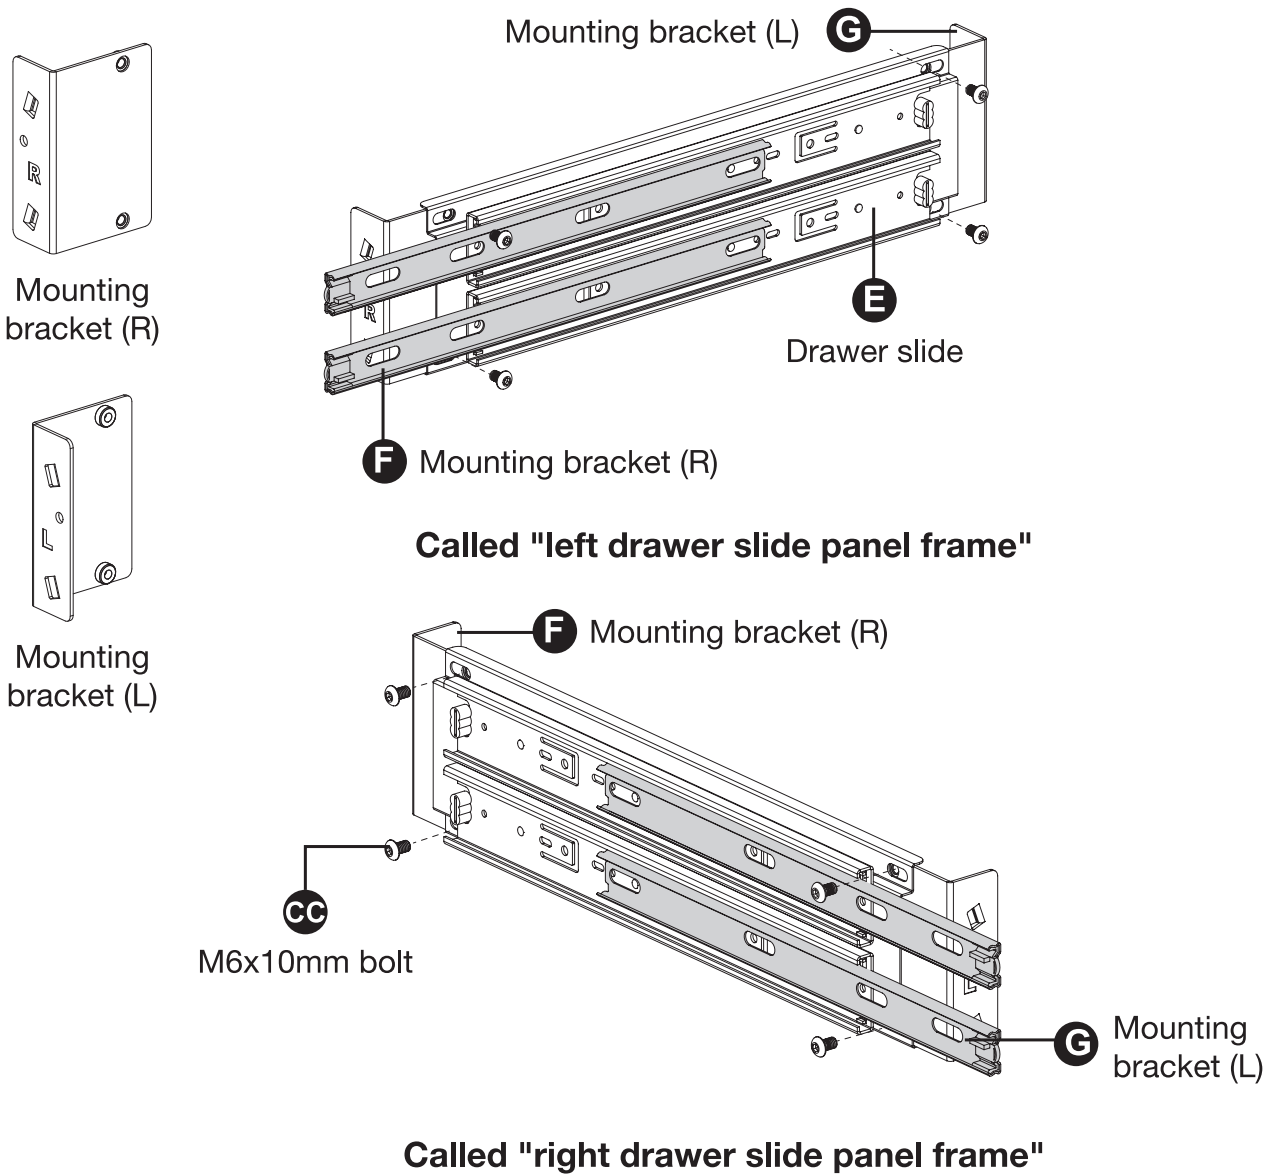


PART	E	F	G	CC
DESCRIPTION	Drawer slide panel	Mounting bracket for drawer slide panel (R)	Mounting bracket for drawer slide panel (L)	M6x10mm bolt
QTY	2	2	2	8

ASSEMBLY

STEP 6: INSTALL THE DRAWER SLIDE PANEL FRAME

- Slide properly the locking tabs of the left drawer slide panel frame to the seventh and eighth teardrop-shaped slots of left post frame from top to bottom, ensuring the outer drawer slides on the left drawer slide panel frame are pulled out facing forward, then fully tighten the two bolts (preinstall at step5). [NOTE: If you can't install the left slide panel frame well, loosen the bolts (preinstall at step5), adjust the installation clearance between drawer slide panel and mounting brackets (L&R).]
- Attach the left drawer slide panel frame to the rack unit with two M6x10mm bolts (CC) and two M6 Nuts (DD), then tighten by a supplied 4mm hex key and wrench.
- Repeat the above step to install the right drawer slide panel frame.

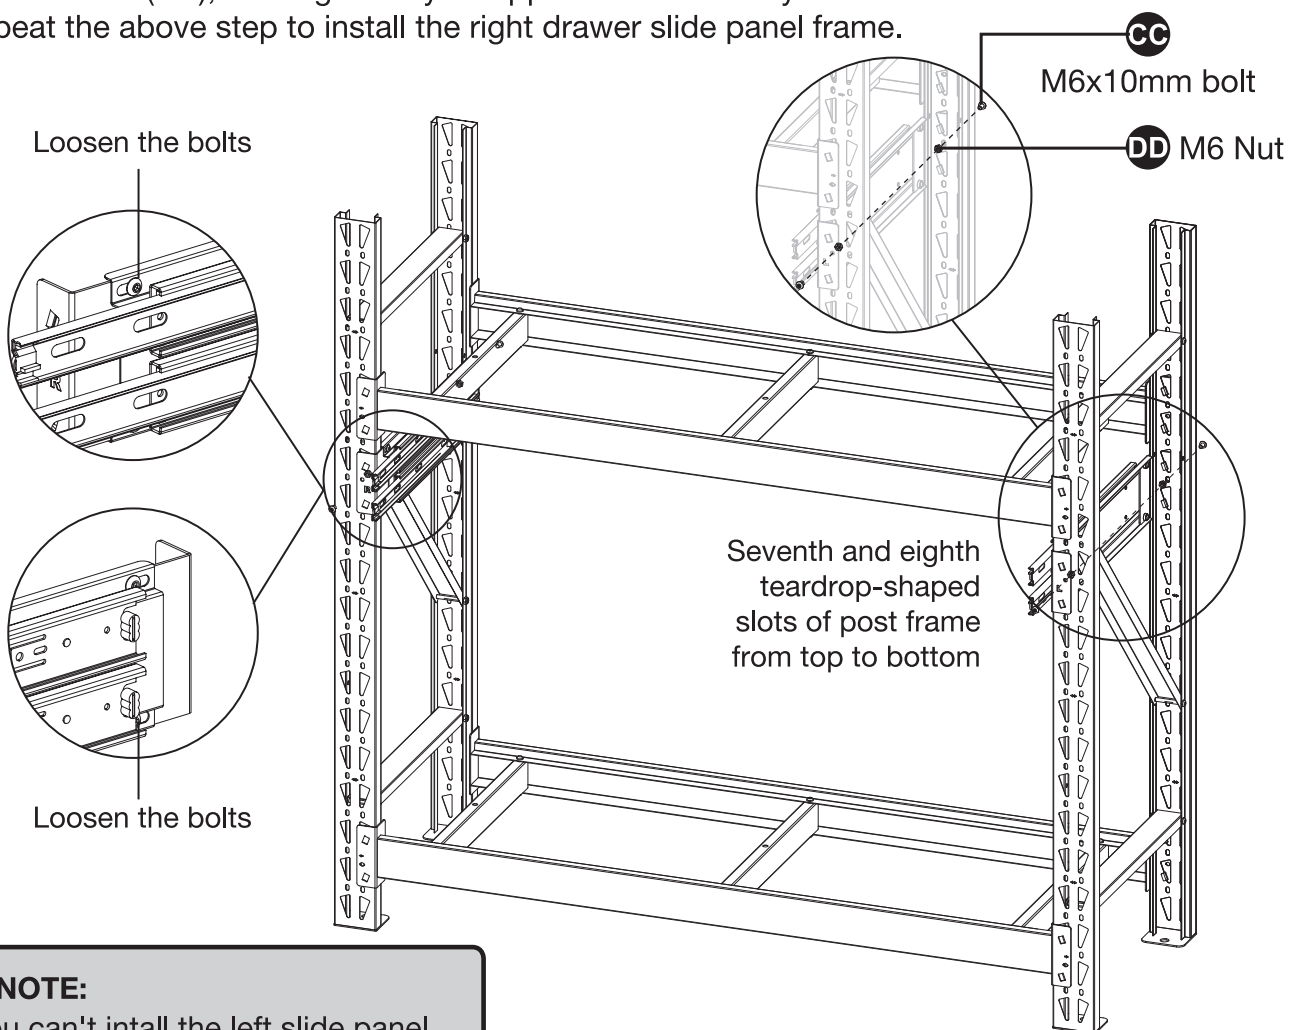

i NOTE:


If you can't install the left slide panel frame well, loosen the bolts (preinstall at step5), adjust the installation clearance between drawer slide panel and mounting brackets (L&R).

PART	CC	DD
DESCRIPTION	M6x10mm bolt	M6 Nut
QTY	4	4

ASSEMBLY

STEP 7: ASSEMBLY THE DRAWER

- Lay the drawer on a flat surface.
- Fold up front and back side of drawer, then fold up the two sides .
- Connect and secure the side panel and back panel of the drawer (H) using four M6x10mm bolts (CC), and then using four M6x10mm bolts (CC) to connect the drawer front panel to the front of the drawer body.

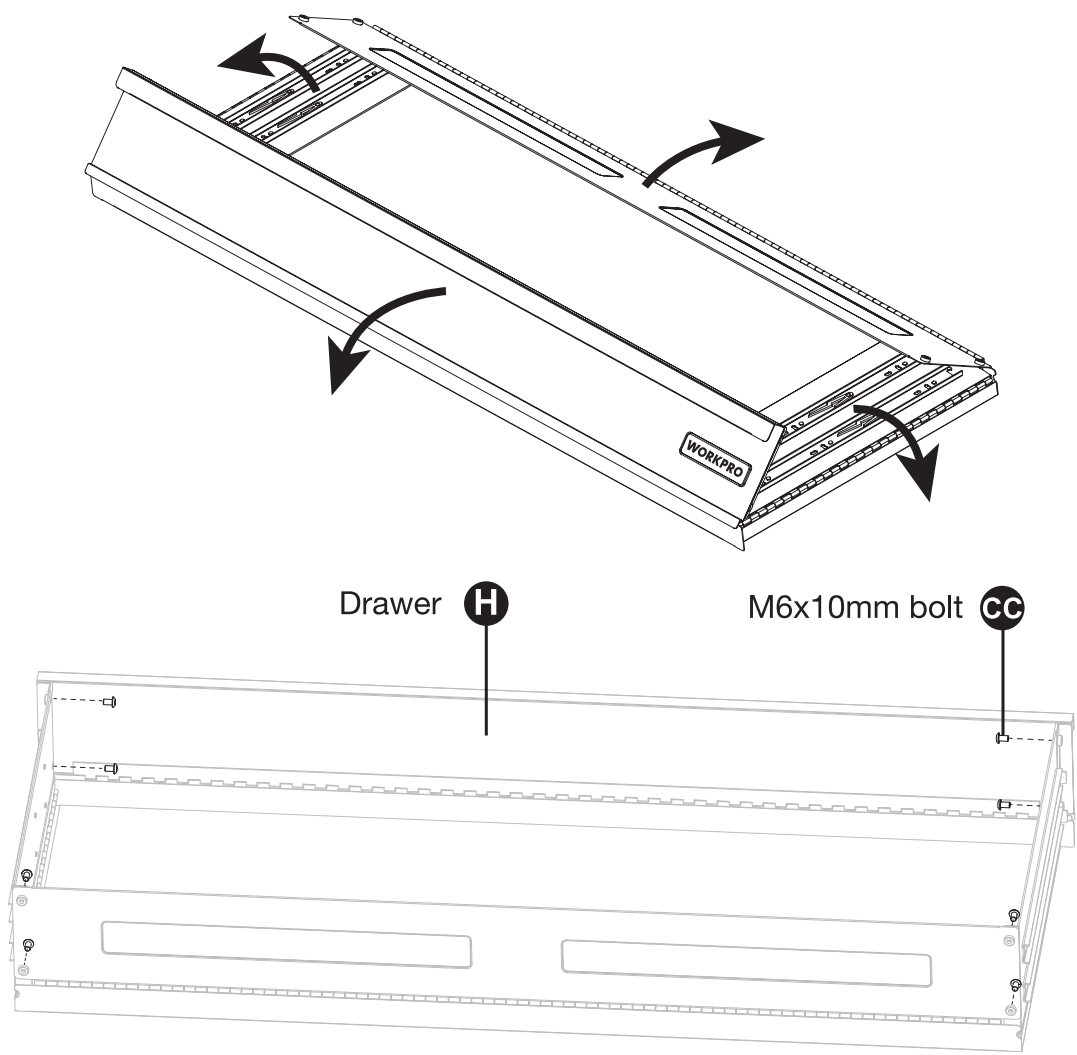


PART	H	CC
DESCRIPTION	Drawer	M6x10mm bolt
QTY	1	8

ASSEMBLY

STEP 8: INSTALL THE DRAWER


- Pull the outer drawer slides out until fully extended.
- Hold the outer drawer slide on the drawer slide panel while aligning them with inner drawer slides on the drawer.
- Slightly insert one side and repeat for the other side.
- Slowly push the drawer until it is fully closed to engage the slide.
- Open the drawer and close it to verify proper operation.

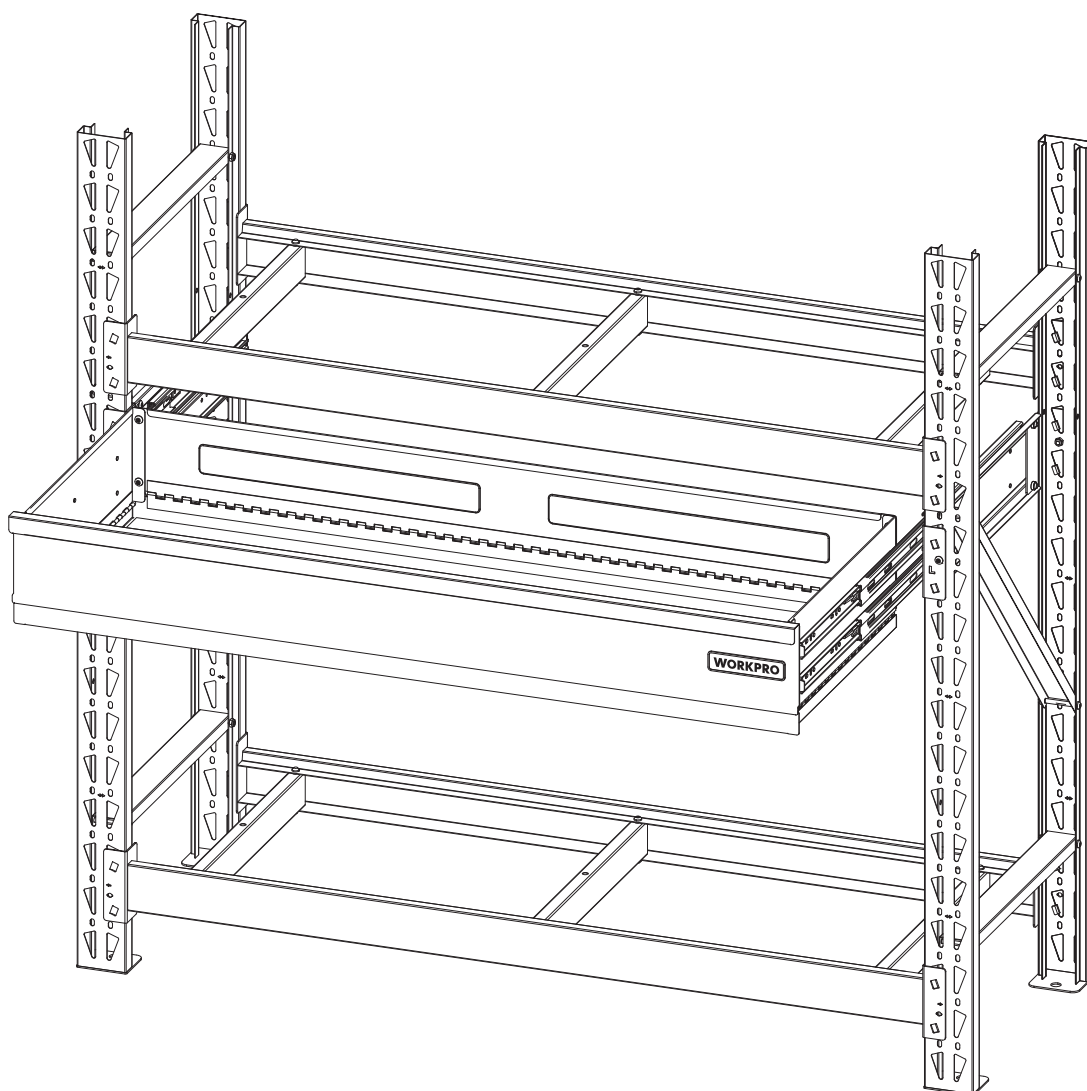

ASSEMBLY

STEP 9: INSTALL THE SHELF PAD

Insert six shelf pads (N) into the middle of shelf supports of beams.

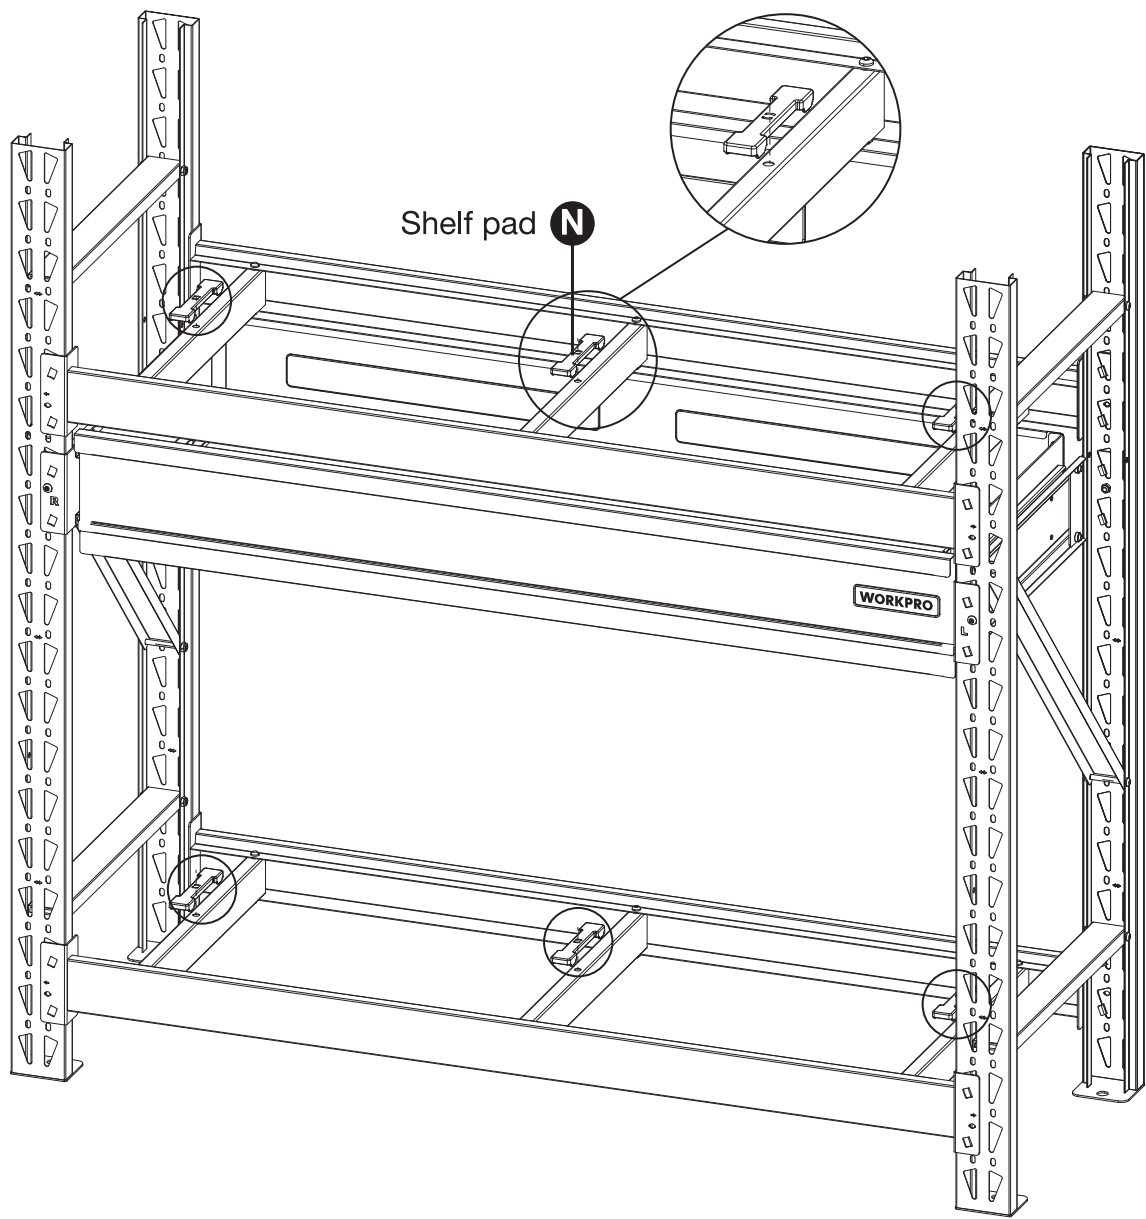


PART	N
DESCRIPTION	Shelf pad
QTY	6

ASSEMBLY

STEP 10: INSTALL THE MDF TABLE TOP AND WIRE SHELF

- Place the wire shelf (J) onto the previously assembled first level on the frame.
- Place the MDF table top (I) onto the previously assembled second level on the frame.

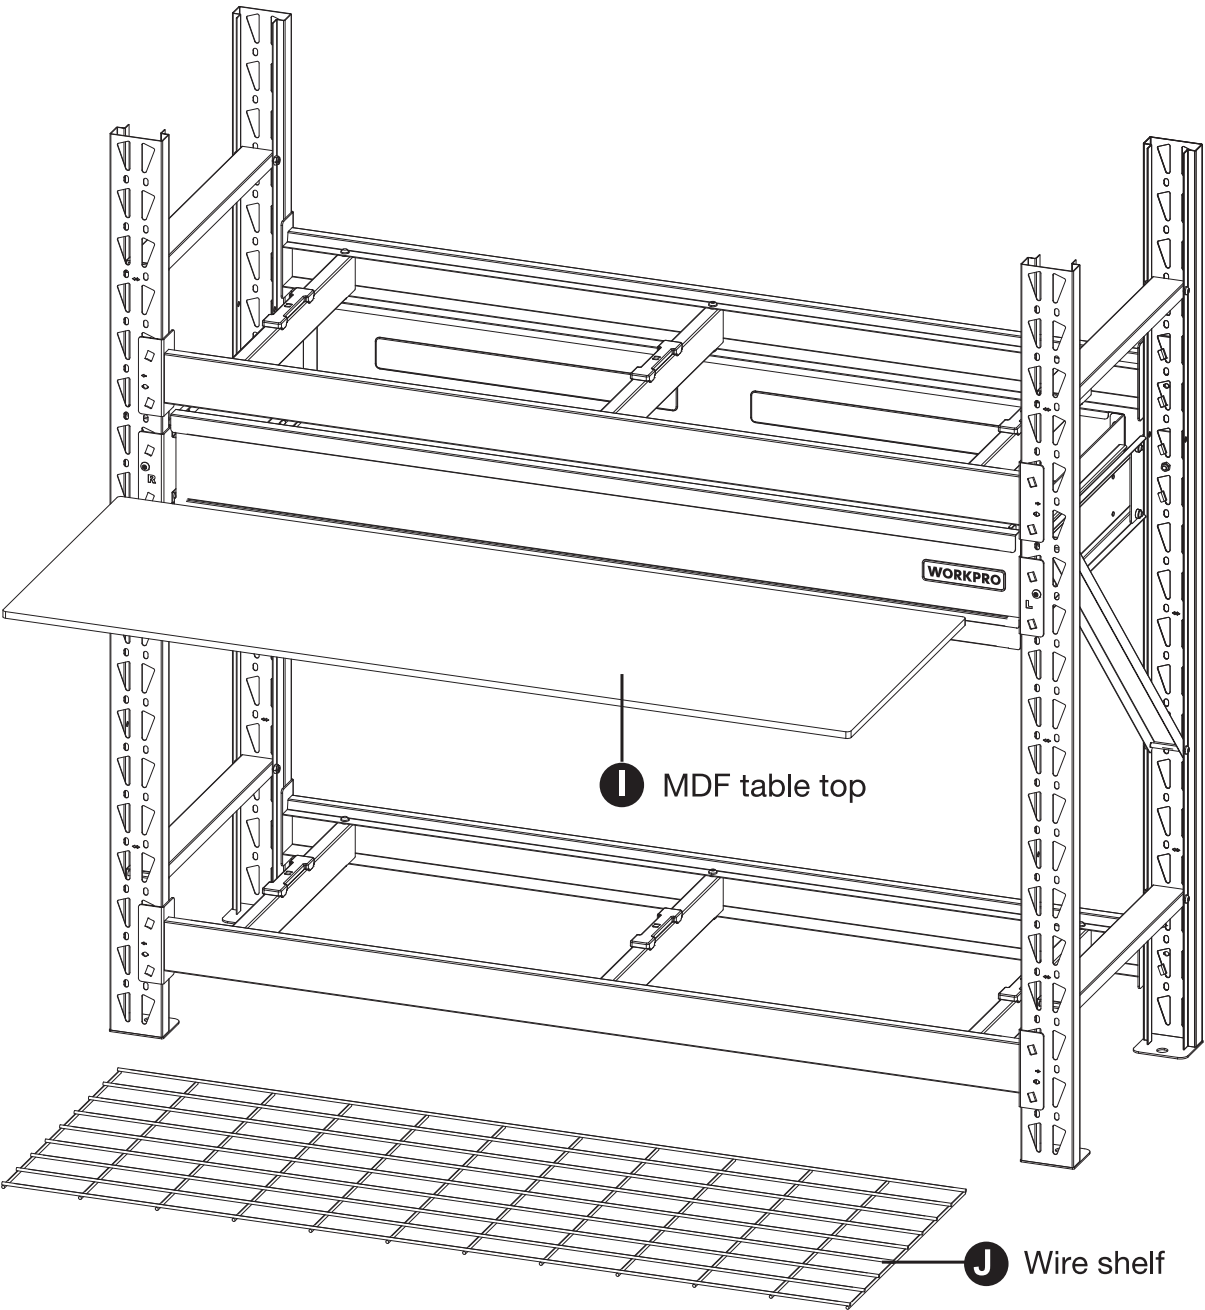


PART	I	J
DESCRIPTION	MDF table top	Wire shelf
QTY	1	1

ASSEMBLY

STEP 11: INSTALL THE TOP PROTECTIVE COVER

Place four top protective cover (M) on each post and tap downward lightly to seat the covers.

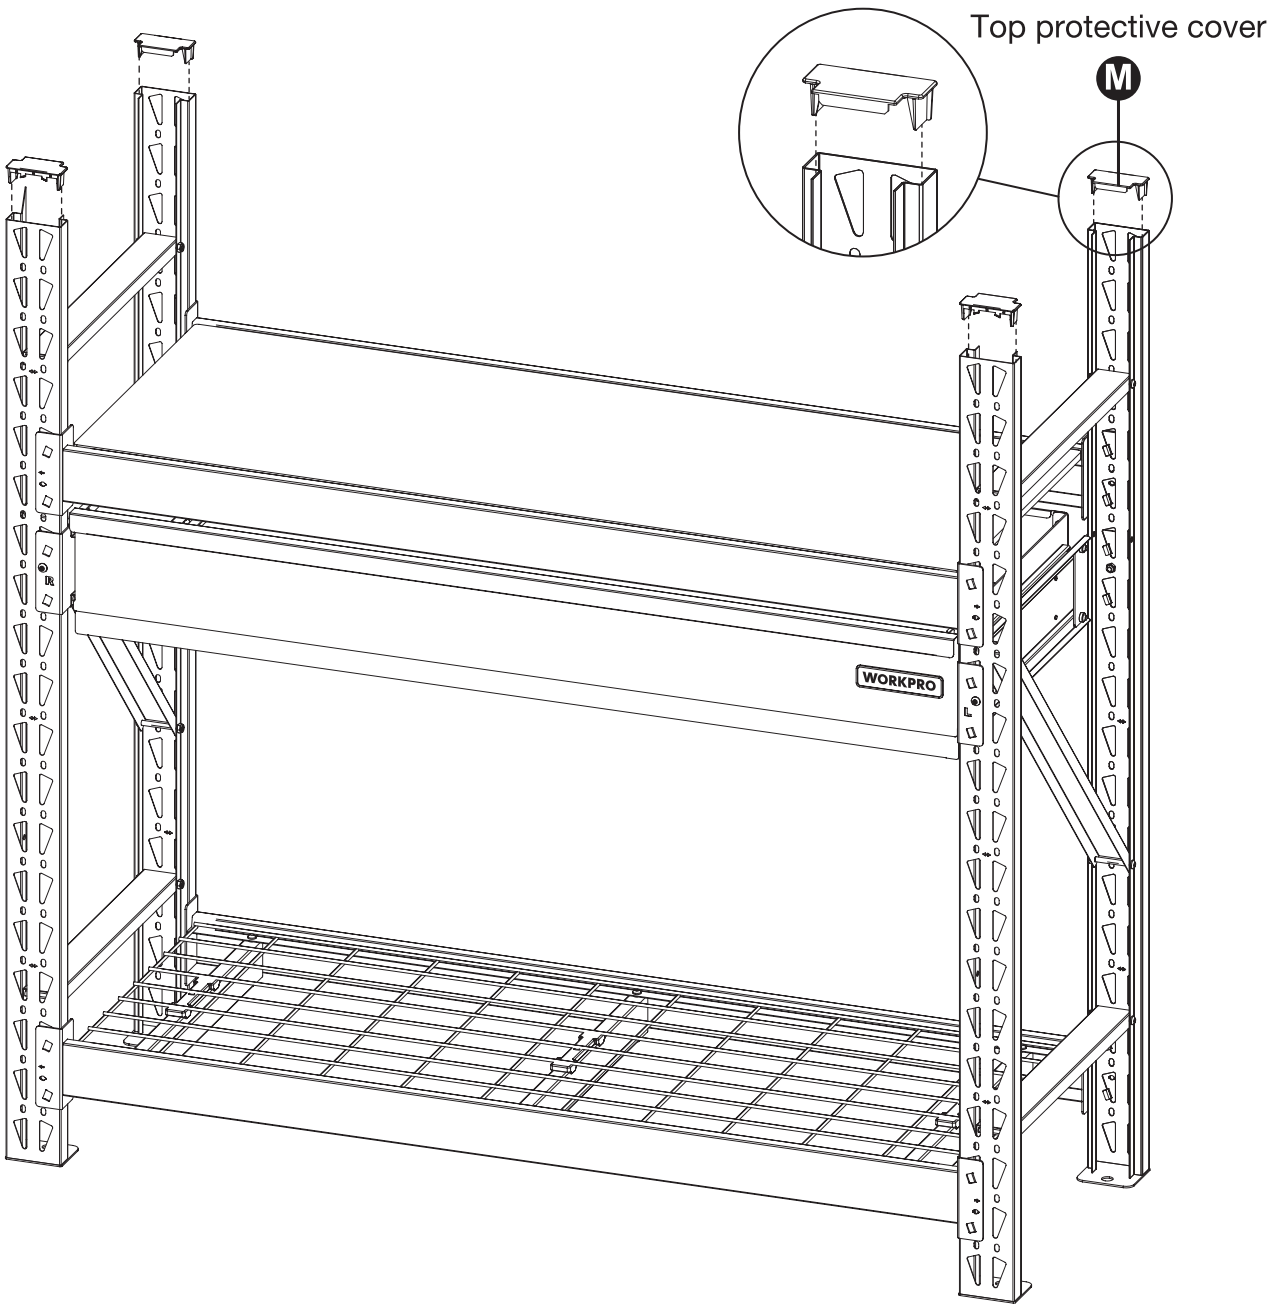

PART	M
DESCRIPTION	Top protective cover
QTY	4

ASSEMBLY

STEP 12: INSTALL THE PEGBOARD COMPONENT


NOTE:

- The pegboard could be installed at rear of the workbench or at side of the workbench as you like.
- Having a helper will ease the assembly of the pegboard while lining up the mounting tabs.
- The two vertical support (L) will be used to elevate the pegboard above the shelf to effectively make use of the metal pegboard.

OPTION 1: INSTALL THE PEGBOARD AT REAR OF THE WORKBENCH

Step 1.1: Install the Rear Mounting Bracket (L&R)

- Identify the rear mounting bracket (L&R) (Q and R). The rear mounting bracket has symbol "L&R".
- Standing at the rear of the workbench, slide the first rear mounting bracket (L) (Q) completely down into the third and fourth teardrop-shaped slots of right post frame from top to bottom to secure it. Ensure that the mounting tabs on the first rear mounting bracket (L) (Q) point upwards.
- Place the second rear mounting bracket (L) (Q) completely down into the tenth and eleventh teardrop-shaped slots of post frame from top to bottom to secure it. Ensure that the mounting tabs on the second rear mounting bracket (L) (Q) point upwards.
- Repeat the above step to install the two rear mounting brackets (R) (R) on the other post frame.

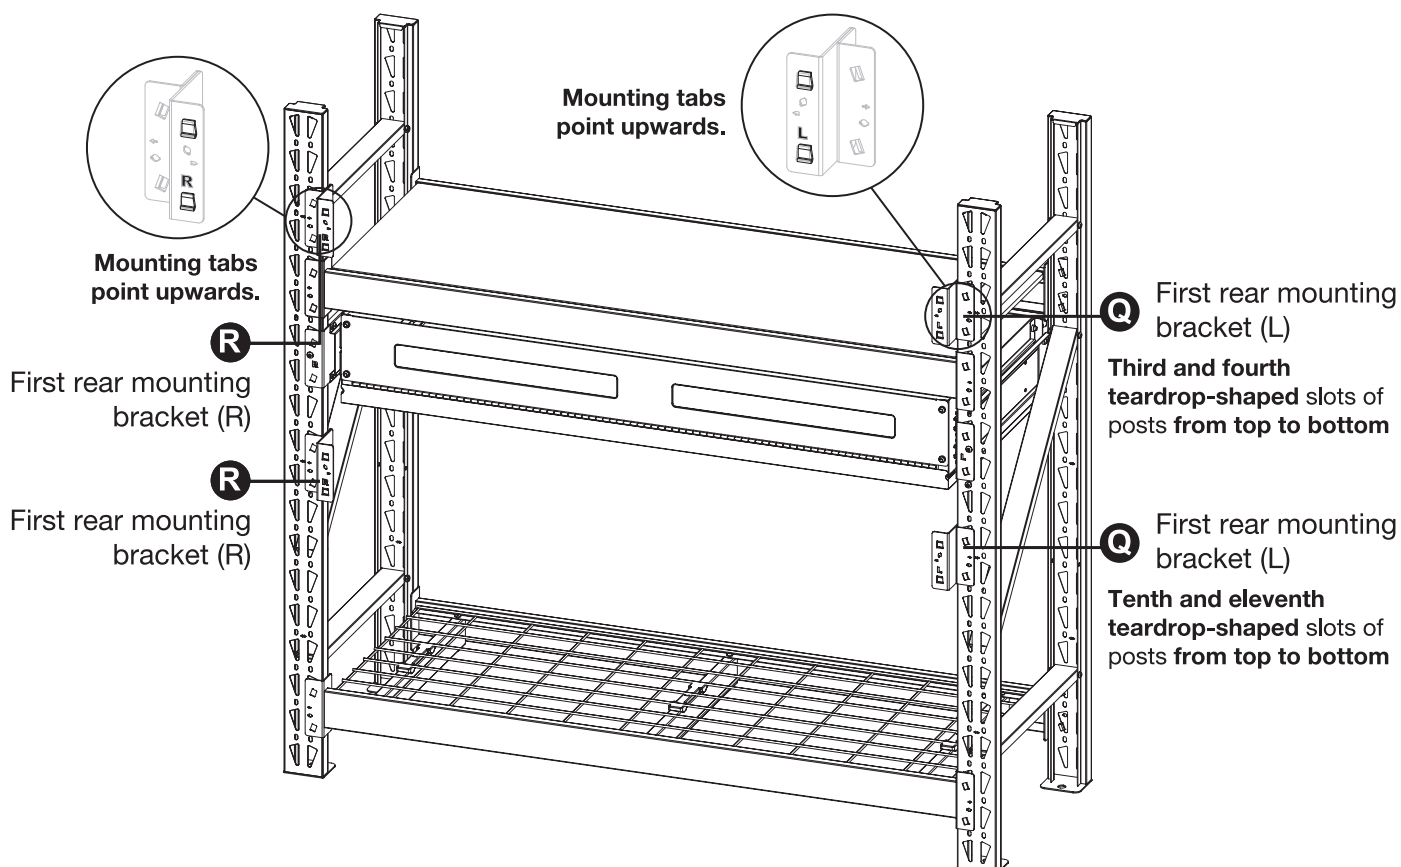


PART	Q	R
DESCRIPTION	Rear mounting bracket (L)	Rear mounting bracket (R)
QTY	2	2

ASSEMBLY

Step 1.2: Install the Vertical Support

- Slide a vertical support (L) vertically onto the mounting tabs of the first rear mounting brackets (L) (Q) then secure at the sixth and seventh square holes of vertical supports (L) from top to bottom, and onto the mounting tabs of the second rear mounting brackets (L) (Q) then secure at the first and second square holes of vertical supports (L) from the bottom up meanwhile. Ensure that the mounting tabs on the vertical support (L) point upwards.
- Repeat the above steps to install the other vertical support (L) to the two rear mounting brackets (R) (R).

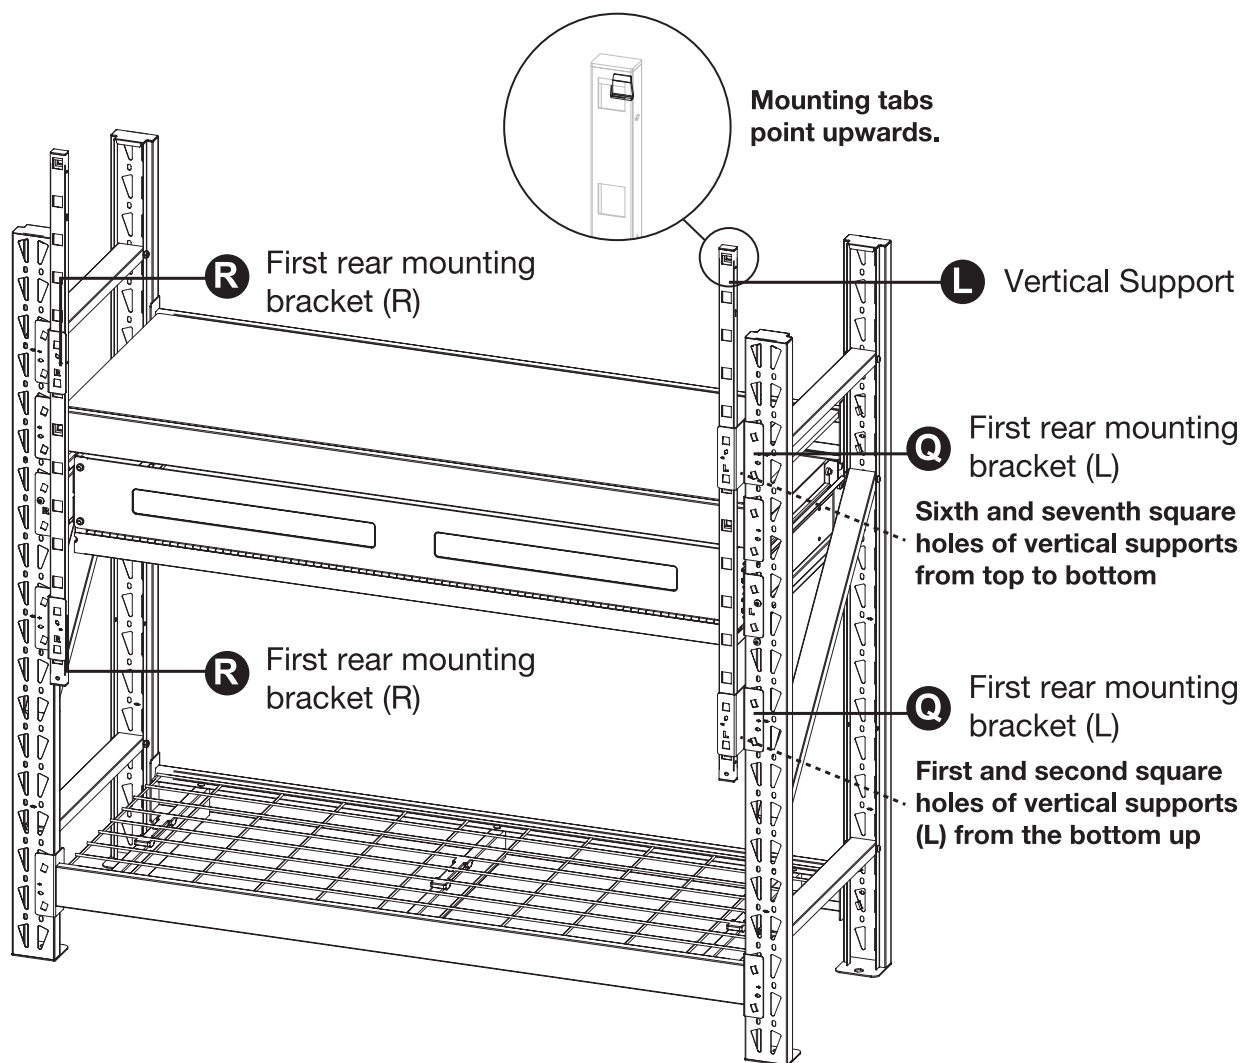


PART	L
DESCRIPTION	Vertical support
QTY	2

ASSEMBLY

Step 1.3: Install the Pegboard

- Line up the slots on the pegboard (K) with the vertical support's tabs. Slide the pegboard down completely onto the tabs to secure it.
- Insert locking pins (EE) through the holes of rack unit to secure the unit as the figure shows.

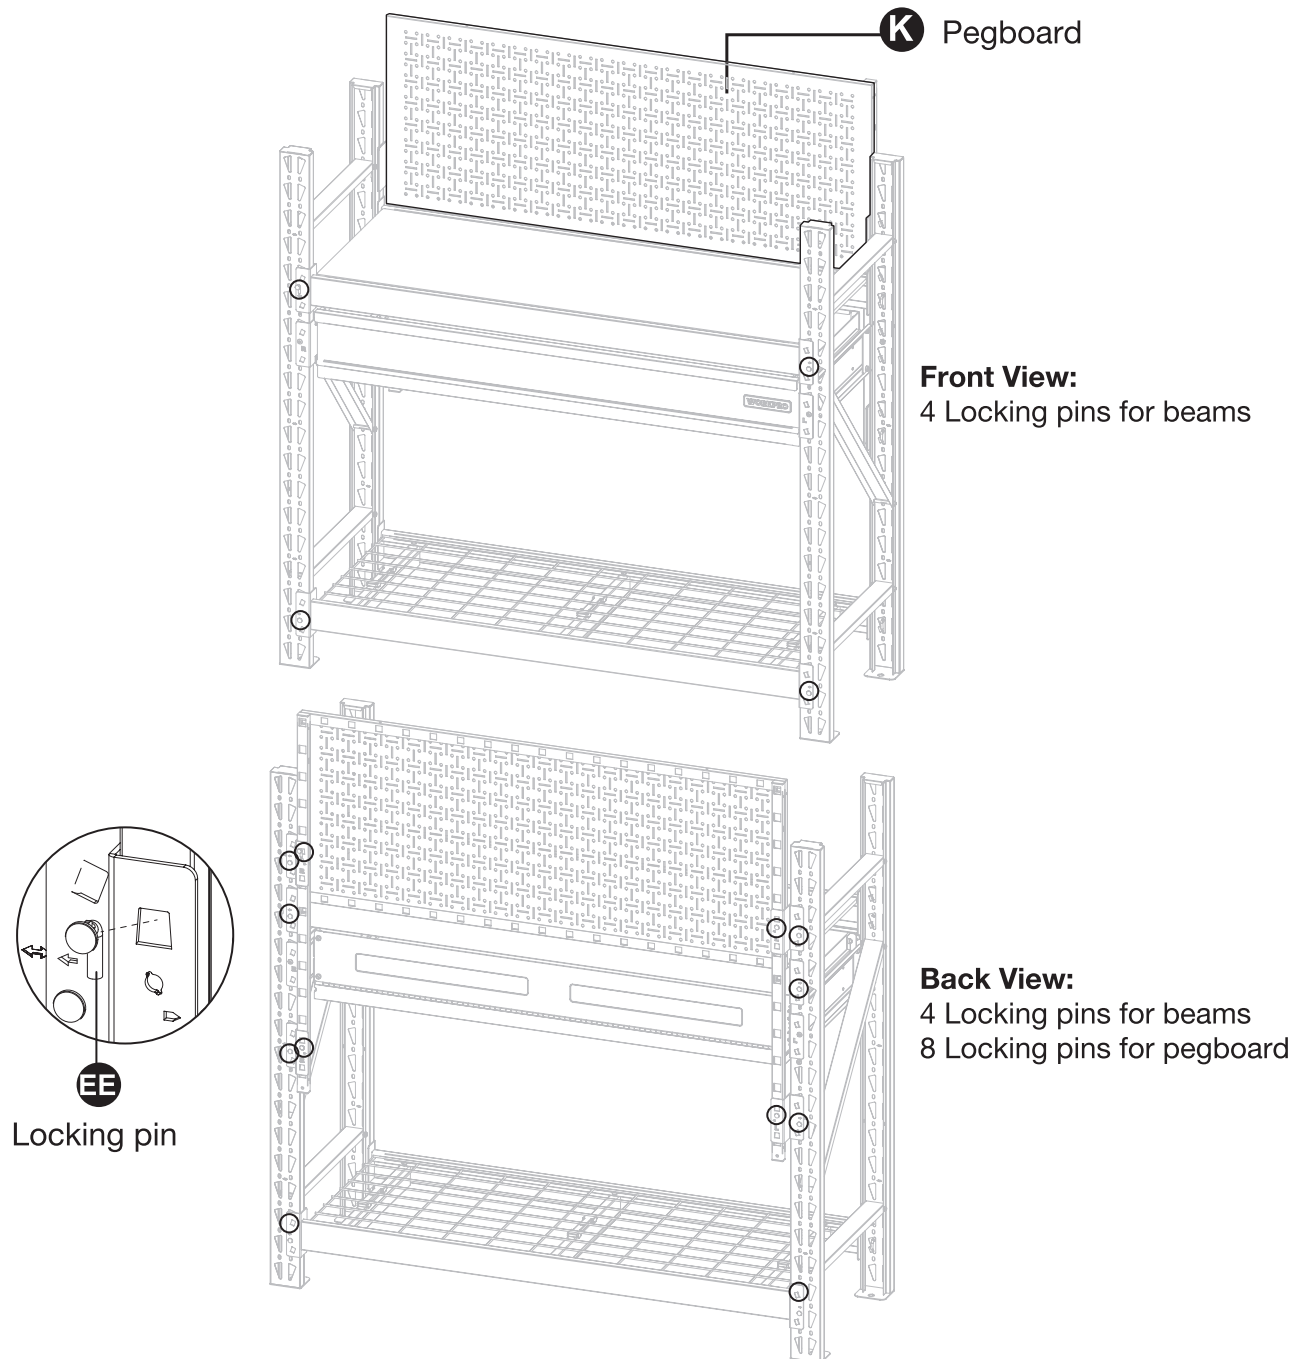


PART	K	EE
DESCRIPTION	Pegboard	Locking pin
QTY	1	16

ASSEMBLY

OPTION 2: INSTALL THE PEGBOARD AT SIDE OF THE WORKBENCH

Step 2.1: Install the Side Mounting Bracket (L&R)

- Standing at the right side of the workbench, slide the first side mounting bracket (L) (O) completely down into the third and fourth teardrop-shaped slots of post frame from top to bottom to secure it. Ensure that the mounting tabs on the first side mounting bracket (L) (O) point upwards.
- Place the second side mounting bracket (L) (O) completely down into the fourth and fifth teardrop-shaped slots of post frame from the bottom up to secure it. Ensure that the mounting tabs on the second side mounting bracket (L) (O) point upwards.
- Repeat the above step to install the two side mounting brackets (R) (P) on the other post.

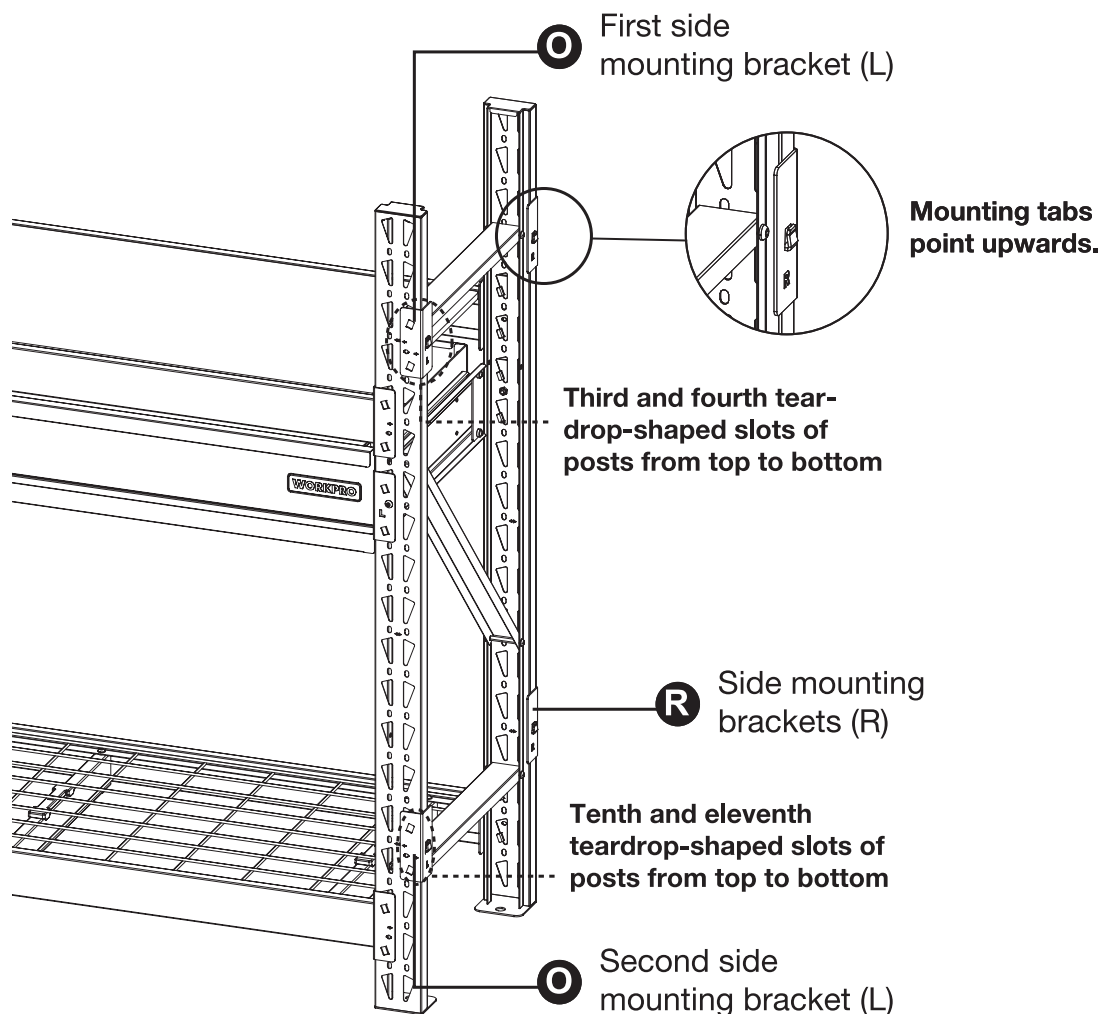


PART	O	P
DESCRIPTION	Side mounting bracket (L)	Side mounting bracket (R)
QTY	2	2

ASSEMBLY

Step 2.2: Install the Pegboard

- Line up the slots on the pegboard (K) with the side mounting brackets (O&P)'s tabs. Slide the pegboard down completely onto the tabs to secure it.
- Insert locking pins (EE) through the holes of rack unit to secure the unit as the figure shows.

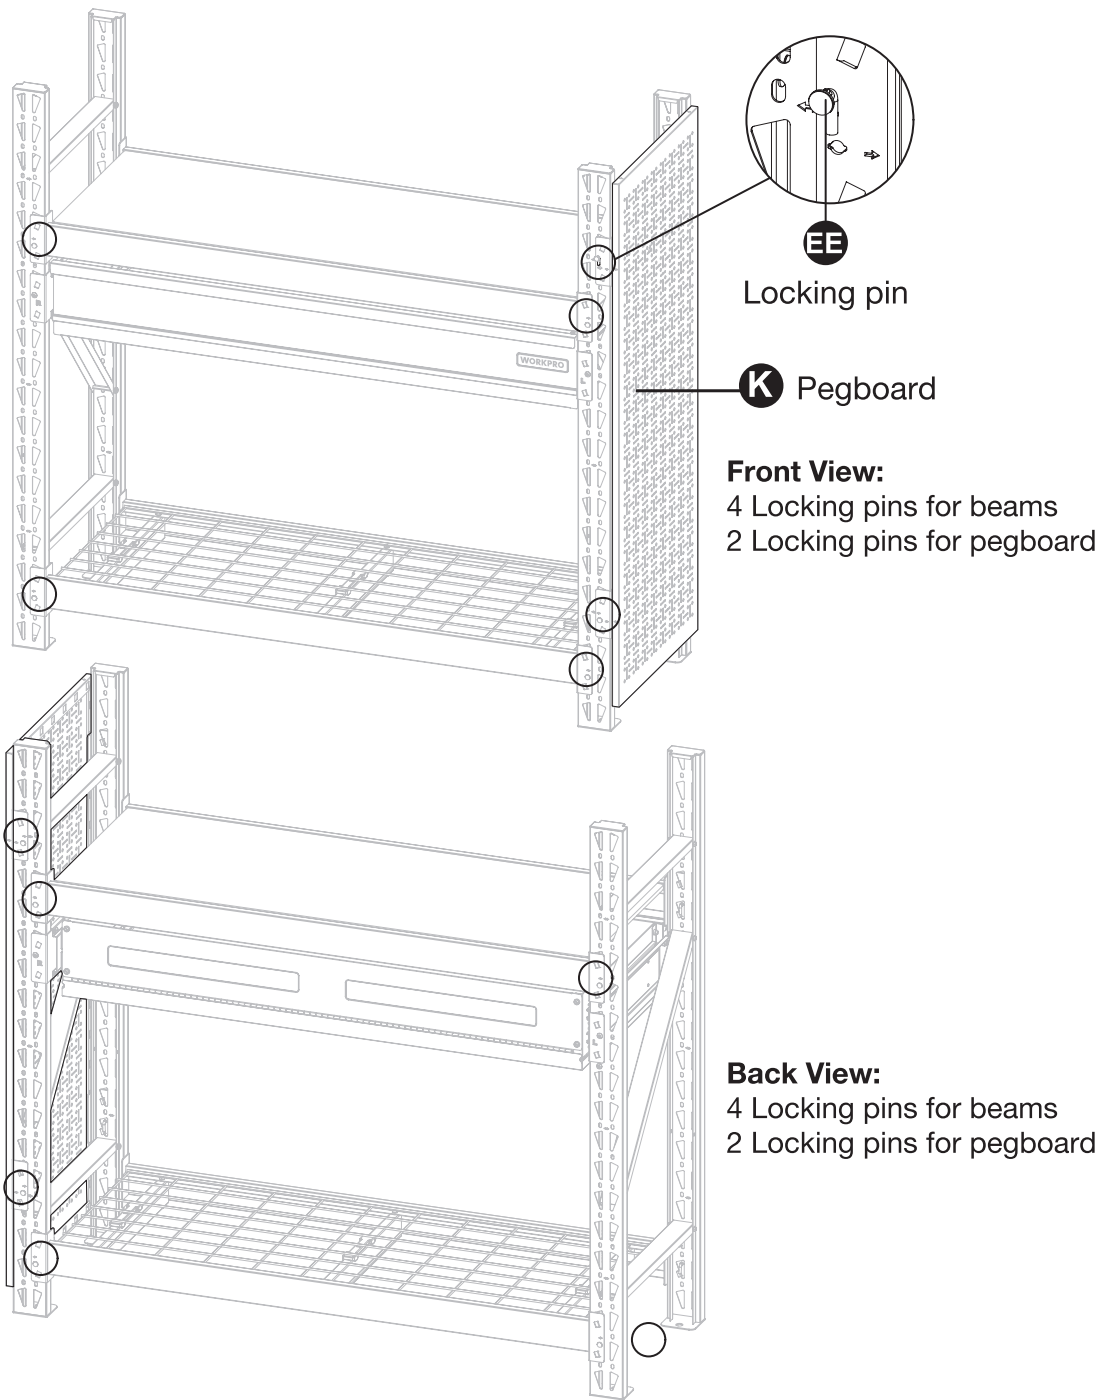


PART	K	EE
DESCRIPTION	Pegboard	Locking pin
QTY	1	12

ASSEMBLY

STEP 13: INSTALL THE ANTI-TIP HARDWARE KIT TO THE WOOD STUDS

- Determine the desired location for the rack unit.
- Secure the wall bracket (S1) to the wall by tightening the screw (S3) into the pilot hole.
- Position the rack unit in place. Thread the male end of the steel cable (S2) through the hole in the bracket (S1) and around the back of the rack post, then connect the two ends of the steel cable (S2) securely by turning the female connector clockwise.

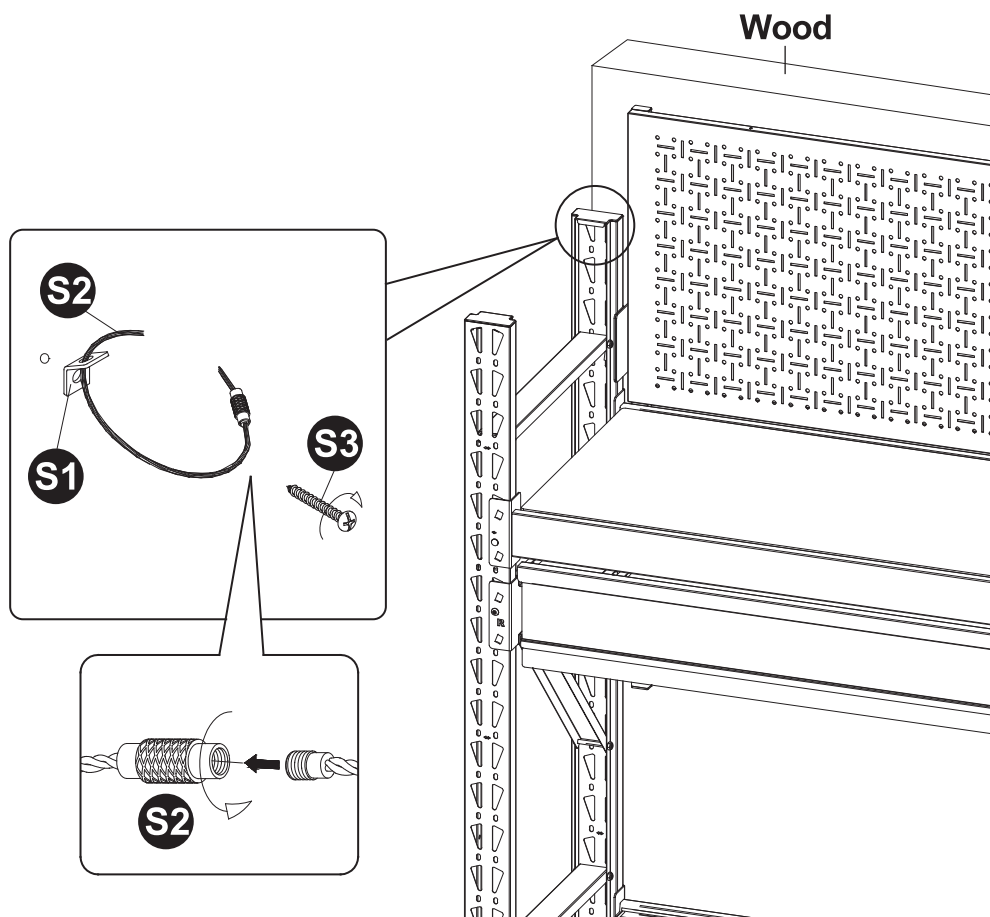

PART	S1	S2	S3
DESCRIPTION	Bracket	Steel cable	Wood screw
QTY	1 set		

MAINTENANCE

Periodically clean the surface of the rack work station with a soft damp rag and dry it with a dry one.

CUSTOMER SERVICE

If you are having difficulty in using this product and require support, please send an email to service@greatstartools.com or call 877-876-7562.