

**DISHDRAWER™ DISHWASHERS**

---

# PLANNING GUIDE

---

## **SERIES 9**

INTEGRATED SINGLE | DD60ST4I2 | DD60S4I2 | DD60ST4HI2 | DD60S4HI2

INTEGRATED DOUBLE | DD60D4I2 | DD60D4HI2

CONTEMPORARY SINGLE | DD60ST4DX2 | DD60ST4HDX2

CONTEMPORARY DOUBLE | DD60D4DX2 | DD60D4HDX2 | DD60D2HNB2

## **SERIES 7**

CONTEMPORARY SINGLE | DD60ST2NB2 | DD60ST2NX2 | DD60S2CCX2 |

DD60S2CX2 | DD60S2HCX2 | DD60ST2HNB2 | DD60ST2HNX2

CONTEMPORARY DOUBLE | DD60D2NB2 | DD60D2HNB2 | DD60D2NX2 |

DD60D2CCX2 | DD60D2CX2 | DD60D2HNX2 | DD60D2HCX2

**FISHER & PAYKEL**



INTRODUCTION

This comprehensive planning guide provides you with the framework and tools to achieve your desired design outcome with Fisher & Paykel appliances. In this guide, you will find a range of conceptual, detailed, and dimensional product information to bring your ideas to life and create spaces that truly reflect your vision.

SUPPORT

For additional design planning and installation support please contact the Fisher & Paykel design support team.  
**designsupport@fisherpaykel.com**

NOTES

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Refer to our website [fisherpaykel.com](https://fisherpaykel.com) for the latest document version. Product specifications may vary from those shown.  
This Planning Guide should not be used as installation guidance for any product. Specific installation guidance will be available with the product on delivery and on our website.

CONTENTS

| CONCEPT DESIGN ⓘ                                 | PAGE | DEVELOPED AND DETAILED DESIGN ⓘ | PAGE | DEVELOPED AND DETAILED DESIGN | PAGE |
|--------------------------------------------------|------|---------------------------------|------|-------------------------------|------|
| <b>DESIGN CHOICE</b>                             |      |                                 |      |                               |      |
| Style overview                                   | 4    |                                 |      |                               |      |
| Integrated overview                              | 5    |                                 |      |                               |      |
| Contemporary overview                            | 6    |                                 |      |                               |      |
| <b>SPECIFICATION GUIDE</b>                       |      |                                 |      |                               |      |
| <b>SERIES 9 INTEGRATED</b>                       |      |                                 |      |                               |      |
| DD60S4I2, DD60ST4I2, DD60S4HI2, DD60ST4HI2       | 8    |                                 |      |                               |      |
| DD60S4I2, DD60S4HI2                              | 9    |                                 |      |                               |      |
| DD60ST4I2, DD60ST4HI2                            | 10   |                                 |      |                               |      |
| DD60D4I2, DD60D4HI2                              | 11   |                                 |      |                               |      |
| <b>SERIES 9 CONTEMPORARY</b>                     |      |                                 |      |                               |      |
| DD60ST4DX2, DD60ST4HDX2                          | 13   |                                 |      |                               |      |
| DD60D4DX2, DD60D4HDX2                            | 15   |                                 |      |                               |      |
| <b>SERIES 7 CONTEMPORARY</b>                     |      |                                 |      |                               |      |
| DD60S2CX2, DD60D2HCX2, DD60S2CCX2                | 18   |                                 |      |                               |      |
| DD60ST2NX2, DD60ST2NB2, DD60ST2HNX2, DD60ST2HNB2 | 19   |                                 |      |                               |      |
| DD60ST2NX2, DD60ST2NB2, DD60ST2HNX2, DD60ST2HNB2 | 20   |                                 |      |                               |      |
| DD60D2CX2, DD60D2CCX2, DD60D2HCX2                | 22   |                                 |      |                               |      |
| DD60D2NX2, DD60D2NB2, DD60D2HNX2, DD60D2HNB2     | 23   |                                 |      |                               |      |

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)

## DESIGN CHOICE



INTEGRATED DISHDRAWER™ DISHWASHER



PANEL READY CUSTOM HANDLE

CONTEMPORARY DISHDRAWER™ DISHWASHER



CONTEMPORARY PROUD HANDLE



CONTEMPORARY RECESSED HANDLE



CONTEMPORARY POCKET HANDLE

Defined by clean lines and timeless design cues, Contemporary style DishDrawer™ Dishwashers bring a sense of balance and refinement to the kitchen.

With minimal installation gaps for a precise, flush fit, Integrated style DishDrawer™ Dishwashers blend effortlessly into surrounding cabinetry. Choose to fully conceal with custom panels or contrast with stainless steel finishes for a cohesive, considered kitchen design.

The proud handle adds visual definition and a tactile element that enhances both the look and usability of the design.


The recessed handle creates a seamless, uninterrupted flow, a functional design detail that supports the clean aesthetic of recessed-handle kitchens and complements a range of interior styles.

The pocket handle offers versatile styling, designed to align with a wide range of appliance aesthetics, whether specified for a replacement appliance or a new kitchen design.


\*Details for Handle and door panel accessories for integrated dishwashers are available on the website

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)

INTEGRATED SINGLE

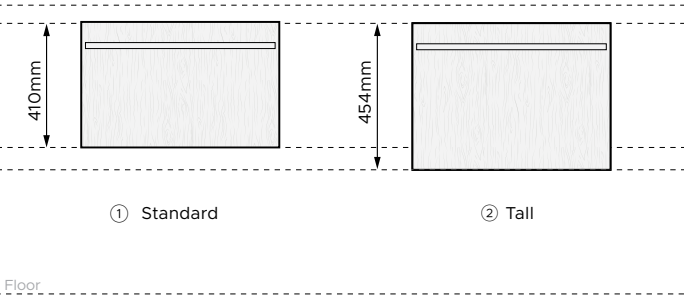

INTEGRATED DOUBLE

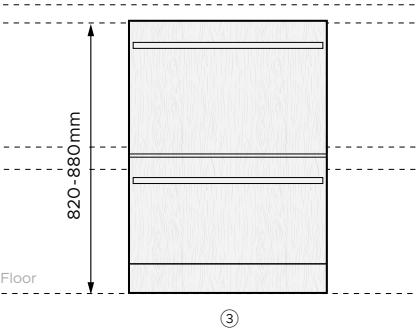

| STYLE                                                    | MODELS                  | PANEL OPTIONS                                                                  | HANDLE OPTIONS                       |
|----------------------------------------------------------|-------------------------|--------------------------------------------------------------------------------|--------------------------------------|
| ① Integrated Single Dishdrawer™ Dishwasher Series 9      | DD60S4I2<br>DD60S4HI2   | Custom panel<br>Stainless Steel ADDD60SPX<br>Black Stainless Steel ADDD60SPB   | Custom handle,<br>Accessory handles* |
| ② Integrated Tall Single Dishdrawer™ Dishwasher Series 9 | DD60ST4I2<br>DD60ST4HI2 | Custom panel<br>Stainless Steel ADDD60STPX<br>Black Stainless Steel ADDD60STPB | Custom handle,<br>Accessory handles* |
| ③ Integrated Double Dishdrawer™ Dishwasher Series 9      | DD60D4I2<br>DD60D4HI2   | Custom panel<br>Stainless Steel ADDD60DPX<br>Black Stainless Steel ADDD60DPB   | Custom handle,<br>Accessory handles* |

\*Contemporary Brushed Aluminium AHD7DDDW60S, Contemporary Brushed Aluminium Black AHD7DDDW60B, Minimal Grey Handle AHM1DDDW60G, Minimal Black Handle AHM1DDDW60B.


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)



CONTEMPORARY SINGLE

CONTEMPORARY TALL SINGLE

CONTEMPORARY DOUBLE

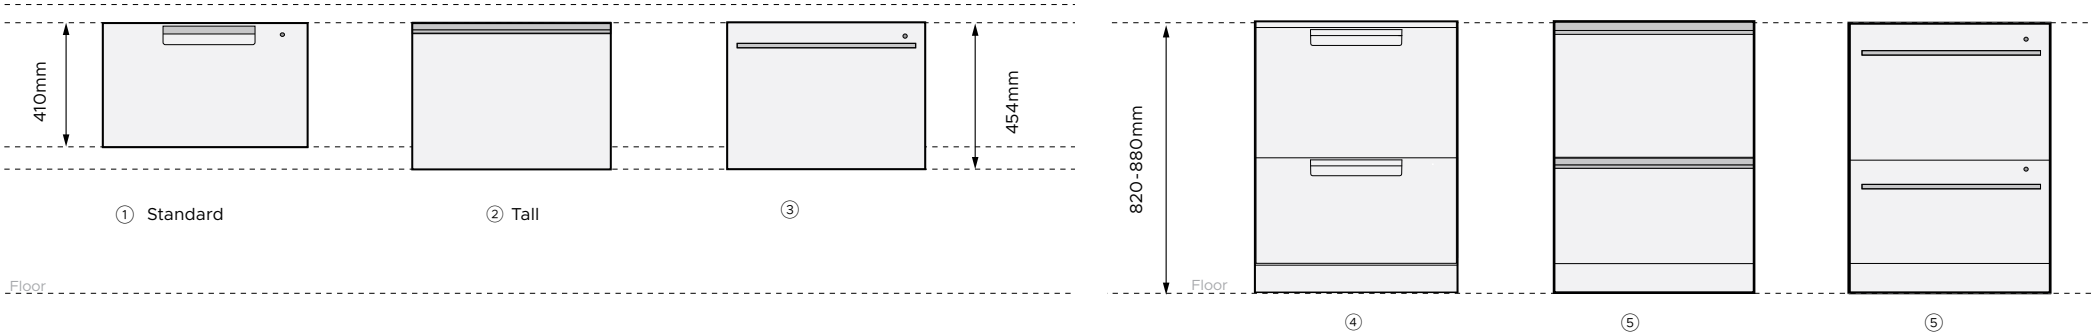

| STYLE                                                      | MODELS                                                 | FINISH                                                                               | HANDLE STYLE                 |
|------------------------------------------------------------|--------------------------------------------------------|--------------------------------------------------------------------------------------|------------------------------|
| ① Contemporary Single DishDrawer™ Dishwasher Series 7      | DD60S2CX2<br>DD60S2CCX2                                | Stainless Steel<br>Stainless Steel                                                   | Contemporary Pocket handle   |
| ② Contemporary Tall Single DishDrawer™ Dishwasher Series 7 | DD60ST2NX2<br>DD60ST2NB2<br>DD60ST2HNX2<br>DD60ST2HNB2 | Stainless Steel<br>Black Stainless Steel<br>Stainless Steel<br>Black Stainless Steel | Contemporary Recessed handle |
| ③ Contemporary Tall Single DishDrawer™ Dishwasher Series 9 | DD60ST4DX2<br>DD60ST4HDX2                              | Stainless Steel<br>Stainless Steel                                                   | Contemporary Proud handle    |
| ④ Contemporary Double DishDrawer™ Dishwasher Series 7      | DD60D2CX2<br>DD60D2CCX2                                | Stainless Steel<br>Stainless Steel                                                   | Contemporary Pocket handle   |
| ⑤ Contemporary Double DishDrawer™ Dishwasher Series 7      | DD60D2NX2<br>DD60D2NB2<br>DD60D2HNX2<br>DD60D2HNB2     | Stainless Steel<br>Black Stainless Steel<br>Stainless Steel<br>Black Stainless Steel | Contemporary Recessed handle |
| ⑥ Contemporary Double DishDrawer™ Dishwasher Series 9      | DD60D4DX2<br>DD60D4HDX2                                | Stainless Steel<br>Stainless Steel                                                   | Contemporary Proud Handle    |

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)

## SPECIFICATION GUIDE





DD60S4I2, DD60S4HI2



DD60ST4I2, DD60ST4HI2

OVERVIEW

The Series 9 Integrated Single DishDrawer™ Dishwasher is designed for true half-load dish care in a single drawer format. Panel-ready for seamless cabinetry integration, it supports flexible placement within the kitchen, while advanced wash technology and intuitive controls help support improved energy and water efficiency.

The Series 9 Integrated Tall Single DishDrawer™ Dishwasher extends the drawer format with added height to accommodate larger dishes and cookware. Designed for true half-load dish care, it supports flexible kitchen planning and bench-height installation, while advanced wash technology and intuitive controls help support improved energy and water efficiency.

PRODUCTS

**Series 9 Integrated Single DishDrawer™ Dishwasher\***  
DD60S4I2  
DD60S4HI2 (water softener model)

**Series 9 Integrated Tall Single DishDrawer™ Dishwasher\***  
DD60ST4I2  
DD60ST4HI2 (water softener model)

\*Not available in all markets

SERIES & STYLE


Series 9  
Custom Handle

FEATURES

- 1 Single drawer designed for true half-load dish care
- 2 Panel-ready design supports seamless integration within custom cabinetry
- 3 Capacitive touch controls make everyday operation simple and intuitive
- 4 **Tall:** Extra height fits larger dishes and cookware, including full-size dinner plates up to 310mm.  
**Standard:** Standard-height drawer fits full-size dinner plates and everyday cookware
- 5 Designed to suit everyday dish loads without needing to fill a full dishwasher
- 6 Designed for bench-height installation to support ergonomic access
- 7 Advanced wash technology supports improved energy and water efficiency
- 8 Versatile wash cycles and modifiers support varied dish care needs
- 9 Fan-assisted drying helps leave dishes ready to use
- 10 Can be paired with other DishDrawer™ models or installed on its own
- 11 New Door installation adjustment system allows fast and accurate door alignment to the surrounding cabinetry. Designed to fit, perfect results, beautiful to use


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)

PRODUCT DIMENSIONS




ISO VIEW

CAVITY DIMENSIONS




ISO VIEW

PLUMBING AND ELECTRICAL



REAR VIEW

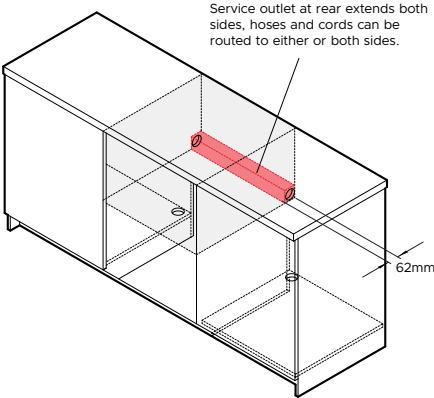

ISO VIEW

|                         |     |
|-------------------------|-----|
|                         | mm  |
| <b>A</b> Overall height | 410 |
| <b>B</b> Overall width  | 599 |
| <b>C</b> Overall depth* | 553 |

\*Does not include integrated door panel.


|                         |         |
|-------------------------|---------|
|                         | mm      |
| <b>A</b> Overall height | min 412 |
| <b>B</b> Overall width  | min 600 |
| <b>C</b> Overall depth  | min 575 |

PRODUCT SPECIFICATIONS

|                            |                                                                                      |
|----------------------------|--------------------------------------------------------------------------------------|
| <b>Weight</b>              | 33 kg                                                                                |
| <b>Packaged Weight</b>     | 40 kg                                                                                |
| <b>Packaged dimensions</b> | <b>H</b> 520mm x <b>W</b> 700mm x <b>D</b> 720mm                                     |
| <b>Electrical</b>          |                                                                                      |
| Dedicated Service (A)      | 5                                                                                    |
| Rated Power (W)            | 1200                                                                                 |
| Supply (Hz)                | 50                                                                                   |
| Voltage (V)                | 220-240                                                                              |
| <b>Plumbing</b>            |                                                                                      |
| Supply                     | 3/4" (20mm) BSP connector water inlet hose.                                          |
| Pressure                   | DD60S4I2: Min 0.03 Mpa (4.35psi), Max 1 Mpa (145psi)<br>Cold water connection @ 20°C |
|                            | DD60S4HI2: Min 0.1 Mpa (14.5psi), Max 1 Mpa (145psi)<br>Cold water connection @ 20°C |


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)

PRODUCT DIMENSIONS




ISO VIEW

CAVITY DIMENSIONS



ISO VIEW

PLUMBING AND ELECTRICAL

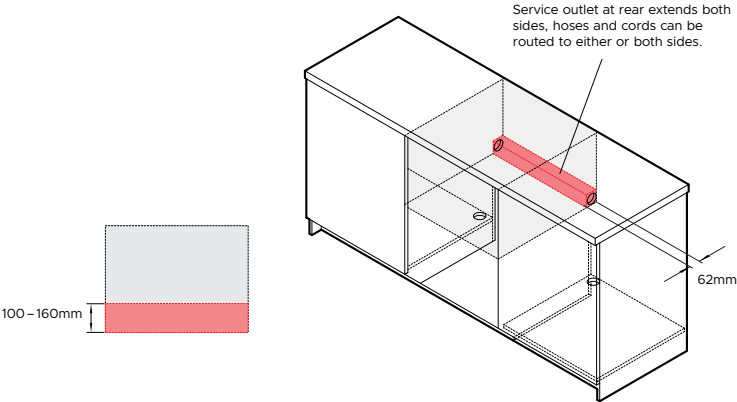

REAR VIEW

ISO VIEW

|                         | mm  |
|-------------------------|-----|
| <b>A</b> Overall height | 454 |
| <b>B</b> Overall width  | 599 |
| <b>C</b> Overall depth* | 553 |

\*Does not include integrated door panel.

|                         | mm      |
|-------------------------|---------|
| <b>A</b> Overall height | min 457 |
| <b>B</b> Overall width  | min 600 |
| <b>C</b> Overall depth  | min 575 |

PRODUCT SPECIFICATIONS

|                            |                                                                                                                                                                                |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Weight</b>              | 33 kg                                                                                                                                                                          |
| <b>Packaged Weight</b>     | 40 kg                                                                                                                                                                          |
| <b>Packaged dimensions</b> | <b>H</b> 520mm x <b>W</b> 700mm x <b>D</b> 720mm                                                                                                                               |
| <b>Electrical</b>          |                                                                                                                                                                                |
| Dedicated Service (A)      | 5                                                                                                                                                                              |
| Rated Power (W)            | 1200                                                                                                                                                                           |
| Supply (Hz)                | 50                                                                                                                                                                             |
| Voltage (V)                | 220-240                                                                                                                                                                        |
| <b>Plumbing</b>            |                                                                                                                                                                                |
| Supply                     | 3/4" (20mm) BSP connector water inlet hose.                                                                                                                                    |
| Pressure                   | DD60ST4I2: Min 0.03 Mpa (4.35psi), Max 1 Mpa (145psi)<br>Cold water connection @ 20°C<br>DD60ST4HI2: Min 0.1 Mpa (14.5psi), Max 1 Mpa (145psi)<br>Cold water connection @ 20°C |

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)



DD60D4I2, DD60D4HI2

OVERVIEW

The Series 9 Integrated Double DishDrawer™ Dishwasher is designed for seamless integration within custom cabinetry. Independent drawers support flexible dish care, while advanced wash technology and intuitive controls help support improved energy and water efficiency.

PRODUCTS

**Series 9 Integrated Double DishDrawer™ Dishwasher\***  
DD60D4I2  
DD60D4HI2 (water softener model)

\*Not available in all markets

SERIES & STYLE


Series 9  
Custom Handle

FEATURES

- 1 Independent drawers can run separately or together
- 2 Panel-ready design supports seamless integration within custom cabinetry
- 3 Designed for bench-height installation to support ergonomic access
- 4 Capacitive touch controls make everyday operation simple and intuitive
- 5 Advanced wash technology supports improved energy and water efficiency
- 6 Each drawer fits full-size dinner plates up to 280mm diameter
- 7 Adaptable racking accommodates a range of dishware and cookware
- 8 Versatile wash cycles and modifiers support different dish care needs
- 9 Fan-assisted drying helps leave dishes ready to use
- 10 SmartHQ™ connectivity offers remote control and notifications through the app
- 11 New Door installation adjustment system allows fast and accurate door alignment to the surrounding cabinetry. Designed to fit, perfect results, beautiful to use


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)

PRODUCT DIMENSIONS




ISO VIEW

CAVITY DIMENSIONS




ISO VIEW

PLUMBING AND ELECTRICAL



REAR VIEW

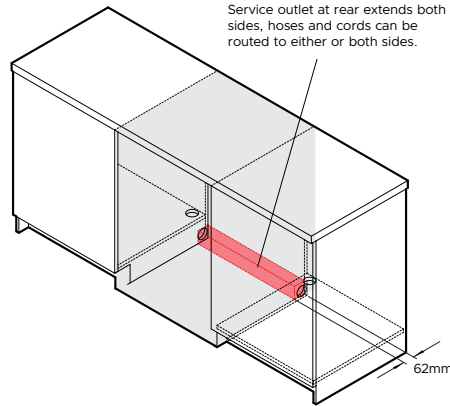

ISO VIEW

|                                        | mm        |                   | mm        |
|----------------------------------------|-----------|-------------------|-----------|
| A Overall height*                      | 820 – 880 | A Overall height* | 822 - 882 |
| B Overall width                        | 599       | B Overall width   | min 600   |
| C Overall depth**                      | 553       | C Overall depth   | min 580   |
| D Height from bottom of door to floor* | 101 - 161 |                   |           |

\* Depending on adjustment of levelling feet

\*\*Does not include integrated door panel.

Black toe kick supplied; custom toe kick optional

\*Depending on adjustment of levelling feet

| PRODUCT SPECIFICATIONS |                                                                                      |
|------------------------|--------------------------------------------------------------------------------------|
| Weight                 | 59 kg                                                                                |
| Packaged Weight        | 67 kg                                                                                |
| Packaged dimensions    | H 937mm x W 700mm x D 720mm                                                          |
| Electrical             |                                                                                      |
| Dedicated Service (A)  | 10                                                                                   |
| Rated Power (W)        | 2400                                                                                 |
| Supply (Hz)            | 50                                                                                   |
| Voltage (V)            | 220-240                                                                              |
| Plumbing               |                                                                                      |
| Supply                 | 3/4" (20mm) BSP connector water inlet hose                                           |
| Pressure               | DD60D4I2: Min 0.03 Mpa (4.35psi), Max 1 Mpa (145psi)<br>Cold water connection @ 20°C |
|                        | DD60D4HI2: Min 0.1 Mpa (14.5psi), Max 1 Mpa (145psi)<br>Cold water connection @ 20°C |

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)



DD60ST4DX2, DD60ST4HDX2

OVERVIEW

The Series 9 Contemporary Tall Single DishDrawer™ Dishwasher extends the drawer format with added height to accommodate larger dishes and cookware. Designed for true half-load dish care, it supports flexible kitchen planning and bench-height installation, while advanced wash technology and intuitive controls help support improved energy and water efficiency.

PRODUCTS

**Series 9 Contemporary Tall Single DishDrawer™ Dishwasher\***  
DD60ST4DX2  
DD60ST4HDX2 (water softener model)

\*Not available in all markets

SERIES & STYLE

Series 9  
Contemporary Proud Handle

FEATURES

- 1 Single tall drawer designed for true half-load dish care
- 2 Designed to suit everyday dish loads without needing to fill a full dishwasher
- 3 Extra height fits larger dishes and cookware, including full-size dinner plates up to 310mm
- 4 Capacitive touch controls make everyday operation simple and intuitive
- 5 Designed for bench-height installation to support ergonomic access
- 6 Advanced wash technology supports improved energy and water efficiency
- 7 Versatile wash cycles and modifiers support varied dish care needs
- 8 Fan-assisted drying helps leave dishes ready to use
- 9 Contemporary stainless steel finish suits modern kitchen designs
- 10 Can be paired with other DishDrawer™ models or installed on its own


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)




PRODUCT DIMENSIONS

CAVITY DIMENSIONS


PLUMBING AND ELECTRICAL




ISO VIEW



ISO VIEW



REAR VIEW

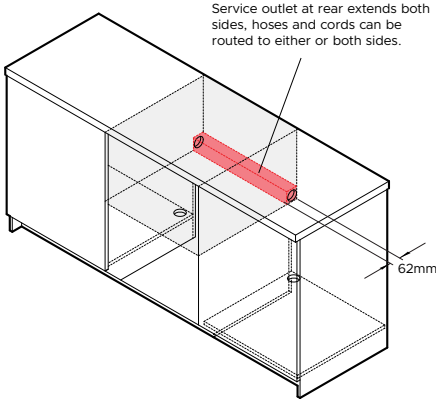

ISO VIEW

|                         |     |
|-------------------------|-----|
|                         | mm  |
| <b>A</b> Overall height | 454 |
| <b>B</b> Overall width  | 599 |
| <b>C</b> Overall depth  | 573 |

|                         |         |
|-------------------------|---------|
|                         | mm      |
| <b>A</b> Overall height | min 457 |
| <b>B</b> Overall width  | min 600 |
| <b>C</b> Overall depth  | min 575 |

| PRODUCT SPECIFICATIONS |                                                                                     |
|------------------------|-------------------------------------------------------------------------------------|
| Weight                 | 33 kg                                                                               |
| Packaged Weight        | 40 kg                                                                               |
| Packaged dimensions    | H 520mm x W 700mm x D 720mm                                                         |
| Electrical             |                                                                                     |
| Dedicated Service (A)  | 5                                                                                   |
| Rated Power (W)        | 1200                                                                                |
| Supply (Hz)            | 50                                                                                  |
| Voltage (V)            | 220-240                                                                             |
| Plumbing               |                                                                                     |
| Supply                 | 3/4" (20mm) BSP connector water inlet hose.                                         |
| Pressure               | DD60ST4DX2: Min 0.03 Mpa (4.35psi), Max 1 Mpa (145psi) Cold water connection @ 20°C |
|                        | DD60ST4HDX2: Min 0.1 Mpa (14.5psi), Max 1 Mpa (145psi) Cold water connection @ 20°C |

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)



DD60D4DX2, DD60D4HDX2

OVERVIEW

The Series 9 Contemporary Double DishDrawer™ Dishwasher supports flexible dish care with independent drawers that can run separately or together. Designed for bench-height installation, it combines advanced wash technology with intuitive controls to support improved energy and water efficiency, while accommodating a wide range of dishware in contemporary kitchen designs.

PRODUCTS

**Series 9 Contemporary Double DishDrawer™ Dishwasher\***  
DD60D4DX2  
DD60D4HDX2 (water softener model)

\*Not available in all markets

SERIES & STYLE

Series 9  
Contemporary Proud Handle


FEATURES

- 1 Independent drawers can run separately or together
- 2 Designed for bench-height installation to support ergonomic access
- 3 Advanced wash technology supports improved energy and water efficiency
- 4 Each drawer fits full-size dinner plates up to 280mm in diameter
- 5 Capacitive touch controls make everyday operation simple and intuitive
- 6 Adaptable racking accommodates a range of dishware and cookware
- 7 Versatile wash cycles and modifiers support different dish care needs
- 8 Fan-assisted drying helps leave dishes ready to use
- 9 Contemporary stainless steel finish suits modern kitchen designs
- 10 SmartHQ™ connectivity offers remote control and notifications through the app

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)



PRODUCT DIMENSIONS




ISO VIEW

|                                              | mm        |
|----------------------------------------------|-----------|
| <b>A</b> Overall height*                     | 820 – 880 |
| <b>B</b> Overall width                       | 599       |
| <b>C</b> Overall depth                       | 573       |
| <b>D</b> Height from bottom of door to floor | 101 - 161 |

\* Depending on adjustment of levelling feet

CAVITY DIMENSIONS




ISO VIEW

|                          | mm        |
|--------------------------|-----------|
| <b>A</b> Overall height* | 822 - 882 |
| <b>B</b> Overall width   | min 600   |
| <b>C</b> Overall depth   | min 580   |

\*Depending on adjustment of levelling feet

PLUMBING AND ELECTRICAL

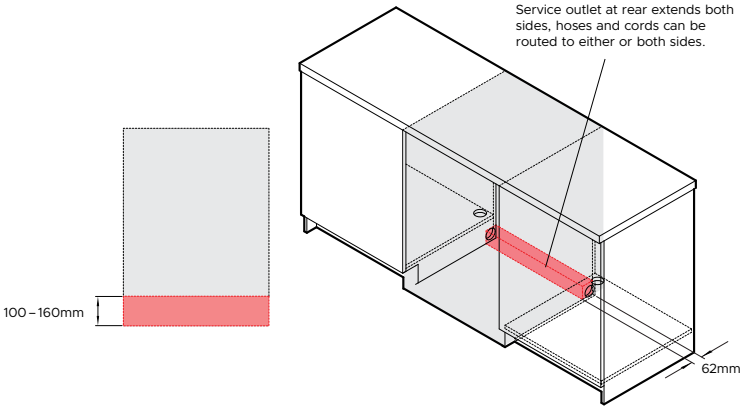

REAR VIEW

ISO VIEW

| PRODUCT SPECIFICATIONS     |                                                                                                                                                                                |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Weight</b>              | 59 kg                                                                                                                                                                          |
| <b>Packaged Weight</b>     | 67 kg                                                                                                                                                                          |
| <b>Packaged dimensions</b> | H 937mm x W 700mm x D 720mm                                                                                                                                                    |
| <b>Electrical</b>          |                                                                                                                                                                                |
| Dedicated Service (A)      | 10                                                                                                                                                                             |
| Rated Power (W)            | 2400                                                                                                                                                                           |
| Supply (Hz)                | 50                                                                                                                                                                             |
| Voltage (V)                | 220-240                                                                                                                                                                        |
| <b>Plumbing</b>            |                                                                                                                                                                                |
| Supply                     | 3/4" (20mm) BSP connector water inlet hose                                                                                                                                     |
| Pressure                   | DD60D4DX2: Min 0.03 Mpa (4.35psi), Max 1 Mpa (145psi)<br>Cold water connection @ 20°C<br>DD60D4HDX2: Min 0.1 Mpa (14.5psi), Max 1 Mpa (145psi)<br>Cold water connection @ 20°C |

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://www.fisherpaykel.com)



DD60S2CX2, DD60S2CCX2

OVERVIEW

The Series 7 Contemporary Single DishDrawer™ Dishwasher represents the next evolution of DishDrawer™ design, delivering advanced performance, quiet operation and true half-load dish care. Its single-drawer format supports flexible kitchen planning, while updated wash technology enables efficient use of energy and water to suit everyday living.

PRODUCTS

**Series 7 Contemporary Single DishDrawer™ Dishwasher\***  
DD60S2CX2  
DD60D2HCX2 (water softener model)  
DD60S2CCX2

\*Not available in all markets

SERIES & STYLE

Series 7  
Contemporary Pocket Handle


FEATURES

- 1 Single drawer format supports true half-load dish care
- 2 Designed to suit everyday dish loads without needing to fill a full dishwasher
- 3 Can be installed at bench height for easy access with minimal bending
- 4 Accommodates full-size dinner plates within a single drawer
- 5 Adaptable racking allows flexibility for different dishware and cookware
- 6 Versatile wash cycles and modifiers support a range of dish care needs
- 7 Fan-assisted drying helps leave dishes ready to use
- 8 Quiet operation suits open-plan kitchen environments
- 9 SmartHQ™ connectivity offers remote control and notifications through the app
- 10 Can be paired with other DishDrawer™ Dishwasher models or installed on its own

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)




PRODUCT DIMENSIONS




ISO VIEW

CAVITY DIMENSIONS




ISO VIEW

PLUMBING AND ELECTRICAL



REAR VIEW

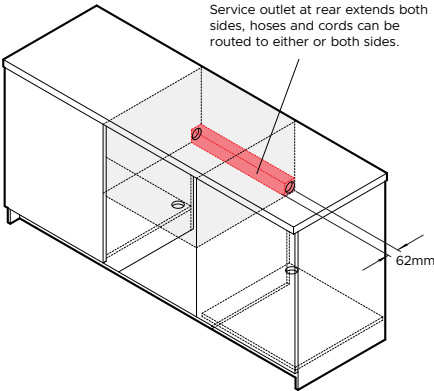

ISO VIEW

|                         | mm  |
|-------------------------|-----|
| <b>A</b> Overall height | 410 |
| <b>B</b> Overall width  | 599 |
| <b>C</b> Overall depth  | 573 |

|                         | mm      |
|-------------------------|---------|
| <b>A</b> Overall height | min 412 |
| <b>B</b> Overall width  | min 600 |
| <b>C</b> Overall depth  | min 575 |

PRODUCT SPECIFICATIONS

|                            |                                                                                                   |
|----------------------------|---------------------------------------------------------------------------------------------------|
| <b>Weight</b>              | 33 kg                                                                                             |
| <b>Packaged Weight</b>     | 40 kg                                                                                             |
| <b>Packaged dimensions</b> | <b>H</b> 520mm x <b>W</b> 700mm x <b>D</b> 720mm                                                  |
| <b>Electrical</b>          |                                                                                                   |
| Dedicated Service (A)      | 5                                                                                                 |
| Rated Power (W)            | 1200                                                                                              |
| Supply (Hz)                | 50                                                                                                |
| Voltage (V)                | 220-240                                                                                           |
| <b>Plumbing</b>            |                                                                                                   |
| Supply                     | 3/4" (20mm) BSP connector water inlet hose.                                                       |
| Pressure                   | DD60S2CX2, DD60S2CCX2: Min 0.03 Mpa (4.35psi),<br>Max 1 Mpa (145psi) Cold water connection @ 20°C |

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)



DD60ST2NX2, DD60ST2HNX2



DD60ST2NB2, DD60ST2HNB2

OVERVIEW

The Series 7 Contemporary Tall Single DishDrawer™ Dishwasher builds on the drawer format with added height to accommodate larger plates and cookware. Designed for true half-load dish care, it supports flexible kitchen planning and everyday use, while updated wash technology enables efficient use of energy and water.

PRODUCTS

**Series 7 Contemporary Tall Single DishDrawer™ Dishwasher\***  
DD60ST2NX2  
DD60ST2HNX2 (water softener model)  
Contemporary Recessed Handle, Stainless Steel

DD60ST2NB2  
DD60ST2HNB2 (water softener model)  
Contemporary Recessed Handle, Black Stainless Steel

\*Not available in all markets

SERIES & STYLE


Series 7  
Contemporary Recessed Handle

FEATURES

- 1Single drawer format supports true half-load dish care
- 2Designed to suit everyday dish loads without needing to fill a full dishwasher
- 3Extra height fits larger dishes and cookware, including full-size dinner plates up to 310mm
- 4Can be installed at bench height for easy access with minimal bending
- 5Adaptable racking allows flexibility for different dishware and cookware
- 6Versatile wash cycles and modifiers support a range of dish care needs
- 7Fan-assisted drying helps leave dishes ready to use
- 8Quiet operation suits open-plan kitchen environments
- 9SmartHQ™ connectivity offers remote control and notifications through the app
- 10Can be paired with other DishDrawer™ models or installed on its own


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)

PRODUCT DIMENSIONS




ISO VIEW

CAVITY DIMENSIONS




ISO VIEW

PLUMBING AND ELECTRICAL



REAR VIEW

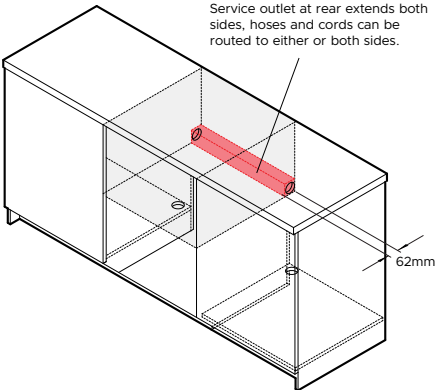

ISO VIEW

|                         |     |
|-------------------------|-----|
|                         | mm  |
| <b>A</b> Overall height | 454 |
| <b>B</b> Overall width  | 599 |
| <b>C</b> Overall depth  | 573 |

|                         |         |
|-------------------------|---------|
|                         | mm      |
| <b>A</b> Overall height | min 457 |
| <b>B</b> Overall width  | min 600 |
| <b>C</b> Overall depth  | min 575 |

| PRODUCT SPECIFICATIONS |                                                                                                  |
|------------------------|--------------------------------------------------------------------------------------------------|
| Weight                 | 33 kg                                                                                            |
| Packaged Weight        | 40 kg                                                                                            |
| Packaged dimensions    | H 520mm x W 700mm x D 720mm                                                                      |
| Electrical             |                                                                                                  |
| Dedicated Service (A)  | 5                                                                                                |
| Rated Power (W)        | 1200                                                                                             |
| Supply (Hz)            | 50                                                                                               |
| Voltage (V)            | 220-240                                                                                          |
| Plumbing               |                                                                                                  |
| Supply                 | 3/4" (20mm) BSP connector water inlet hose.                                                      |
| Pressure               | DD60ST2NX2, DD60ST2NB2: Min 0.03 Mpa (4.35psi), Max 1 Mpa (145psi) Cold water connection @ 20°C  |
|                        | DD60ST2HNX2, DD60ST2HNB2: Min 0.1 Mpa (14.5psi), Max 1 Mpa (145psi) Cold water connection @ 20°C |

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](#)



DD60D2CX2, DD60D2CCX2, DD60D2HCX2



DD60D2NX2, DD60D2NB2, DD60D2HNX2, DD60D2HNB2

**OVERVIEW**

The Series 7 Contemporary Double DishDrawer™ Dishwasher represents the next evolution of DishDrawer™ design, offering advanced performance and everyday flexibility. Its double-drawer format allows each drawer to operate independently or together, while updated wash technology supports efficient use of energy and water to suit the demands of everyday living.

**PRODUCTS**

**Series 7 Contemporary Double DishDrawer™ Dishwasher\***

DD60D2CX2  
DD60D2CCX2  
DD60D2HCX2 (water softener model)  
Contemporary Pocket Handle, Stainless Steel

DD60D2NX2  
DD60D2HNX2 (water softener model)  
Contemporary Recessed Handle, Stainless Steel

DD60D2NB2  
DD60D2HNB2 (water softener model)  
Contemporary Recessed Handle, Black Stainless Steel

\*Not available in all markets.

**SERIES & STYLE**

Series 7  
Contemporary Pocket Handle  
Contemporary Recessed Handle


**FEATURES**

- 1 Independent drawers can run separately or together
- 2 Two drawers allow flexible dish care across multiple loads
- 3 Can be installed at bench height for easy access with minimal bending
- 4 Each drawer fits full-size dinner plates up to 280mm diameter
- 5 Adaptable racking accommodates a range of dishware and cookware
- 6 Versatile wash cycles and modifiers support different dish care needs
- 7 Fan-assisted drying helps leave dishes ready to use
- 8 Quiet operation suits open-plan kitchen environments
- 9 Contemporary stainless steel or black stainless steel finishes suit modern kitchen designs
- 10 SmartHQ™ connectivity offers remote control and notifications through the app

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)




PRODUCT DIMENSIONS




ISO VIEW

CAVITY DIMENSIONS




ISO VIEW

PLUMBING AND ELECTRICAL



REAR VIEW

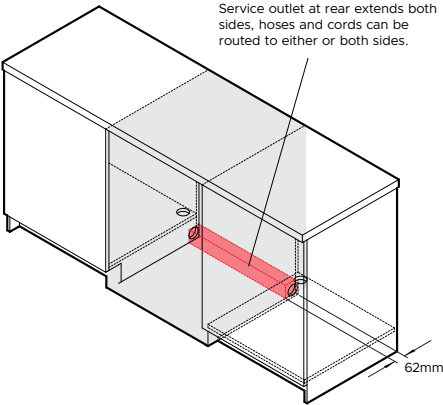

ISO VIEW

|                                              | mm        |
|----------------------------------------------|-----------|
| <b>A</b> Overall height*                     | 820 – 880 |
| <b>B</b> Overall width                       | 599       |
| <b>C</b> Overall depth                       | 573       |
| <b>D</b> Height from bottom of door to floor | 101 - 161 |

\* Depending on adjustment of levelling feet

|                          | mm        |
|--------------------------|-----------|
| <b>A</b> Overall height* | 822 - 882 |
| <b>B</b> Overall width   | min 600   |
| <b>C</b> Overall depth   | min 580   |

\*Depending on adjustment of levelling feet


PRODUCT SPECIFICATIONS

|                            |                                                                                                                                                                                      |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Weight</b>              | 59 kg                                                                                                                                                                                |
| <b>Packaged Weight</b>     | 67 kg                                                                                                                                                                                |
| <b>Packaged dimensions</b> | H 937mm x W 700mm x D 720mm                                                                                                                                                          |
| <b>Electrical</b>          |                                                                                                                                                                                      |
| Dedicated Service (A)      | 10                                                                                                                                                                                   |
| Rated Power (W)            | 2400                                                                                                                                                                                 |
| Supply (Hz)                | 50                                                                                                                                                                                   |
| Voltage (V)                | 220-240                                                                                                                                                                              |
| <b>Plumbing</b>            |                                                                                                                                                                                      |
| Supply                     | 3/4" (20mm) BSP connector water inlet hose                                                                                                                                           |
| Pressure                   | DD60D2CX2, DD60D2CCX2: Min 0.03 Mpa (4.35psi), Max 1 Mpa (145psi) Cold water connection @ 20°C<br>DD60D2HCX2: Min 0.1 Mpa (14.5psi), Max 1 Mpa (145psi) Cold water connection @ 20°C |

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)




PRODUCT DIMENSIONS




ISO VIEW

CAVITY DIMENSIONS



ISO VIEW

PLUMBING AND ELECTRICAL

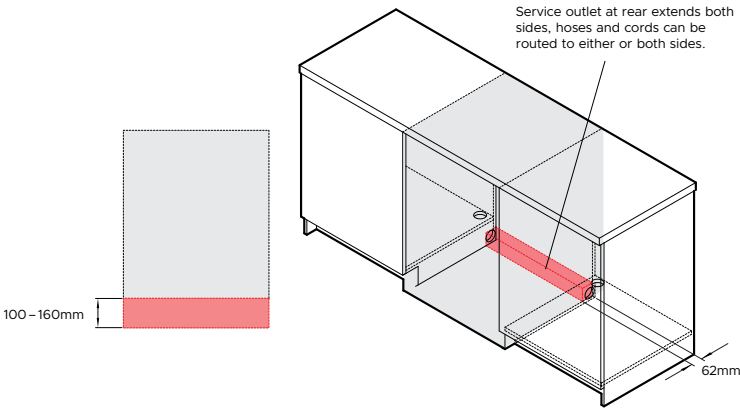

|                                              | mm        |
|----------------------------------------------|-----------|
| <b>A</b> Overall height*                     | 820 – 880 |
| <b>B</b> Overall width                       | 599       |
| <b>C</b> Overall depth                       | 573       |
| <b>D</b> Height from bottom of door to floor | 101 - 161 |

\* Depending on adjustment of levelling feet

|                          | mm        |
|--------------------------|-----------|
| <b>A</b> Overall height* | 822 - 882 |
| <b>B</b> Overall width   | min 600   |
| <b>C</b> Overall depth   | min 580   |

\*Depending on adjustment of levelling feet

| PRODUCT SPECIFICATIONS |                                                                                                |
|------------------------|------------------------------------------------------------------------------------------------|
| Weight                 | 59 kg                                                                                          |
| Packaged Weight        | 67 kg                                                                                          |
| Packaged dimensions    | H 937mm x W 700mm x D 720mm                                                                    |
| Electrical             |                                                                                                |
| Dedicated Service (A)  | 10                                                                                             |
| Rated Power (W)        | 2400                                                                                           |
| Supply (Hz)            | 50                                                                                             |
| Voltage (V)            | 220-240                                                                                        |
| Plumbing               |                                                                                                |
| Supply                 | 3/4" (20mm) BSP connector water inlet hose                                                     |
| Pressure               | DD60D2NX2, DD60D2NB2: Min 0.03 Mpa (4.35psi), Max 1 Mpa (145psi) Cold water connection @ 20°C  |
|                        | DD60D2HNX2, DD60D2HNB2: Min 0.1 Mpa (14.5psi), Max 1 Mpa (145psi) Cold water connection @ 20°C |

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://fisherpaykel.com)

