



CSS8018

Commercial Series Ceiling Speaker

INSTALLATION INSTRUCTIONS

1. Install according to diagram.
2. Connect leads according to Tap Wiring chart.
3. Cut off bare portion of unused leads and terminate with wire nuts.

Note: Always install in accordance with applicable electrical and building codes.

Tap Wiring:


	Orange	Green	Gray	Yellow	Black
25V	1.3W	2.5W	5W	10W	COM
	White	Blue	Brown	Orange	Black
70V	1.3W	2.5W	5W	10W	COM
100V	2.5W	5W	10W	N/C	COM



JBL Professional
8500 Balboa Boulevard, P.O. Box 2200
Northridge, California 91329 U.S.A.

Tile Rails CSS-TR4/8 (x2)


Secure to ceiling/grids in manner required by local building code.

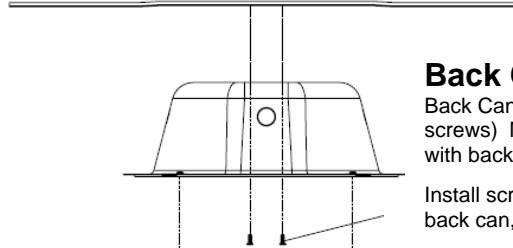

Back Can CSS-BB8

Back Can / Tile Rail screws (machine screws) M4 x 8 mm (4 places, packaged with back can)

Install screw through thru-hole in back can, and screw into tile rail.

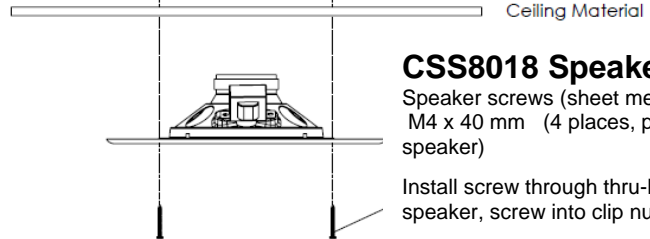

CSS8018 Speaker

Speaker screws (sheet metal screws) M4 x 40 mm (4 places, packaged with speaker)

Install screw through thru-hole in speaker, screw into clip nut in back can.

CSS8018 Instr 06/10