



ASSEMBLY INTRUDUCTIONS

SPARE PARTS:

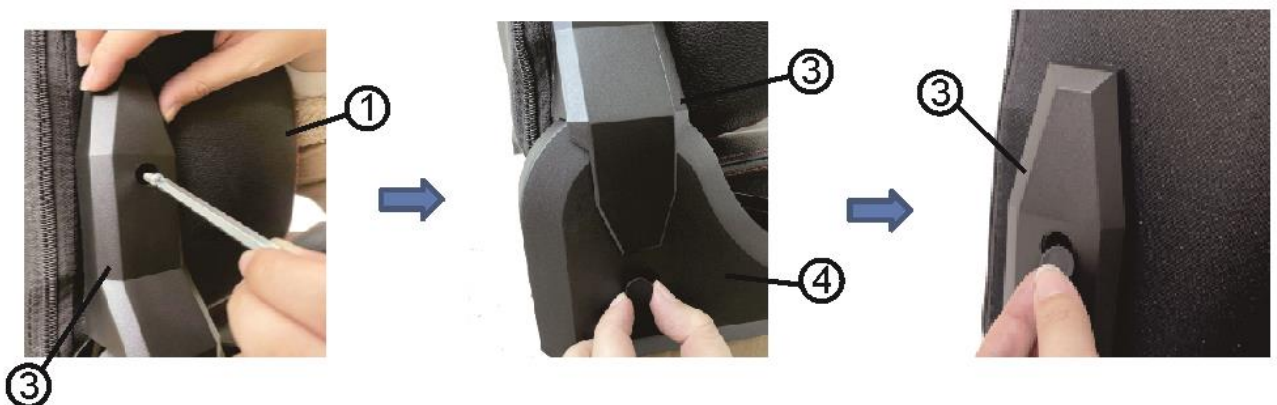

STEPS:

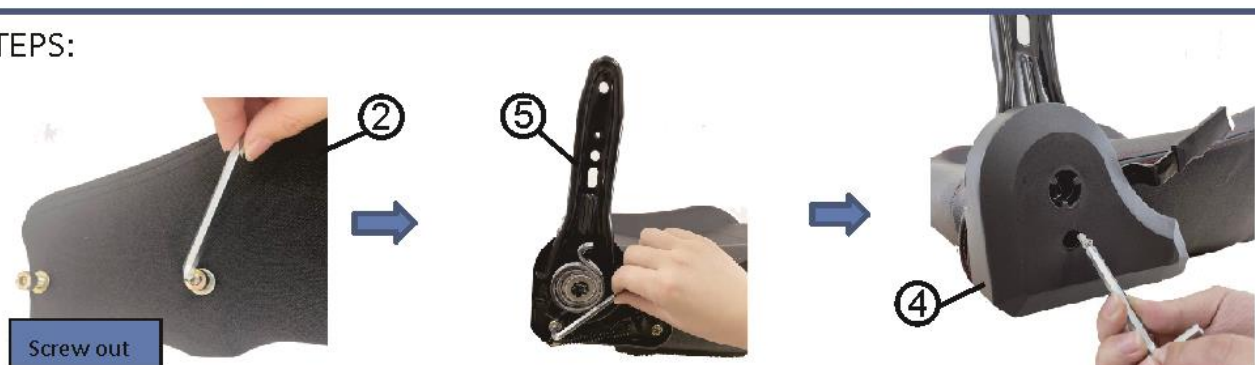


Step 1: Invert the chair and hold down the slide rail handle with your fingers	Step 2: Remove the slide rail
	
Step 3: Draw the same distance on both sides	Step 4: Place the seat onto the seat bracket
	
Step 5: Align the mounting holes of the slide rail with the mounting holes of the bracket	Step 6: Insert the bolt from top to bottom and install the nut from bottom to top
	
Step 7: Tighten the nuts on both sides	Step 8: Press and hold the handle to slide the seat forward
	












Step 9: Slide the seat forward to expose the installation hole	Step 10: Use an Allen wrench to assist in inserting the bolt into the installation hole
	
Step 11: Use an Allen wrench on both sides to assist in inserting the bolt into the installation hole	Step 12: Use an open-end wrench to tighten the nut
	

GS49

Product Assembly Manual

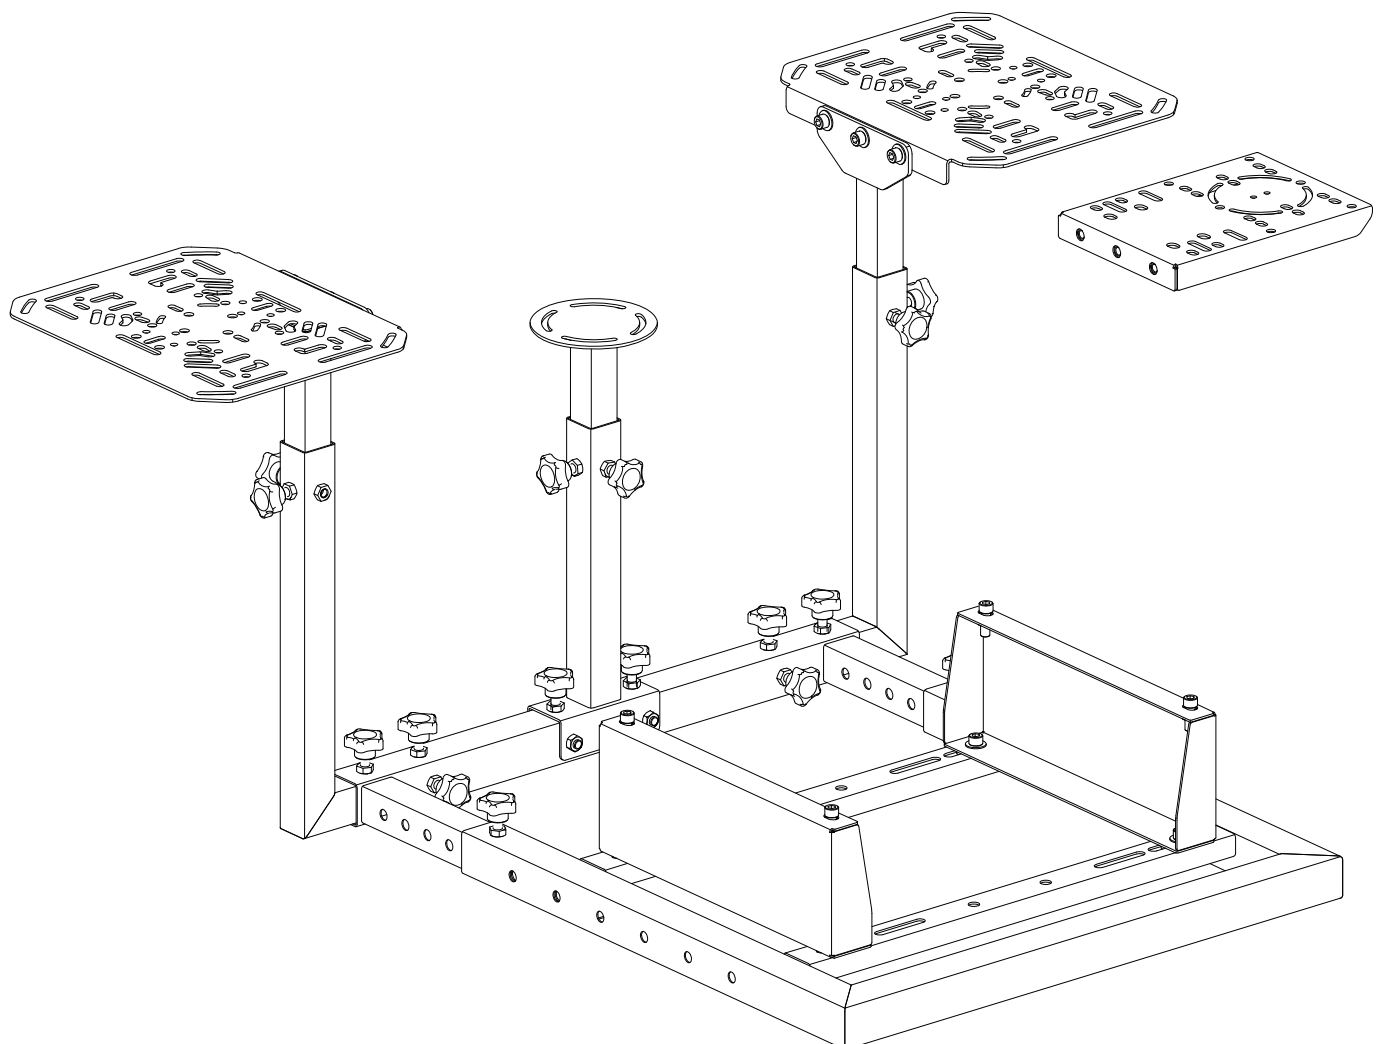


accessories explanation

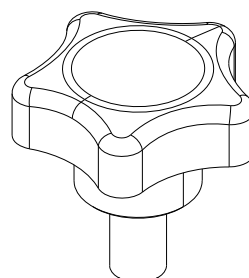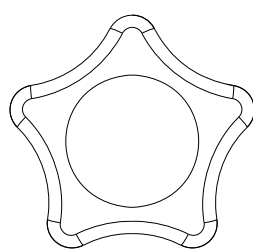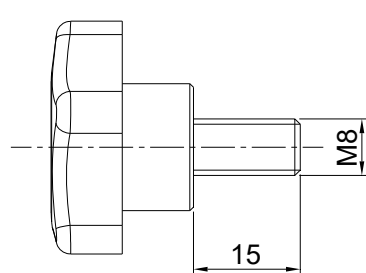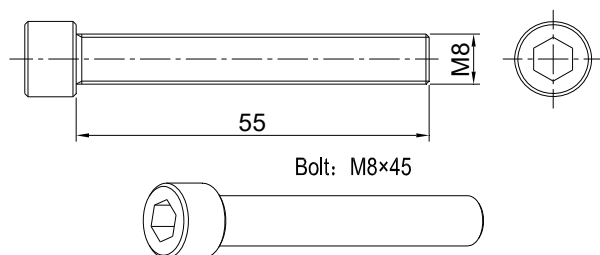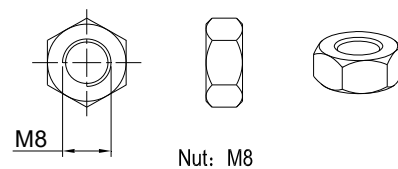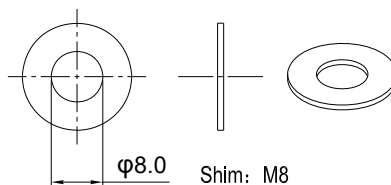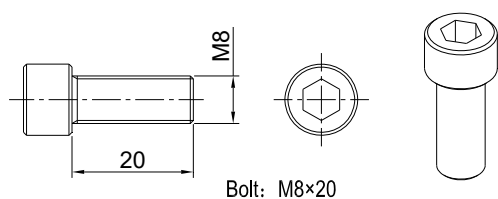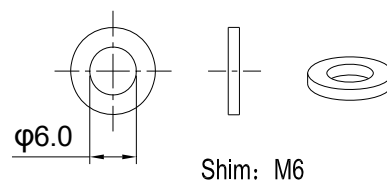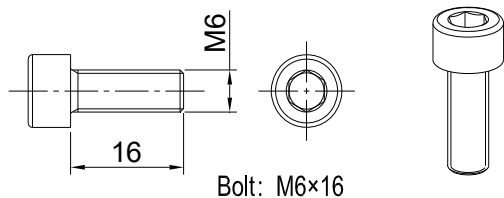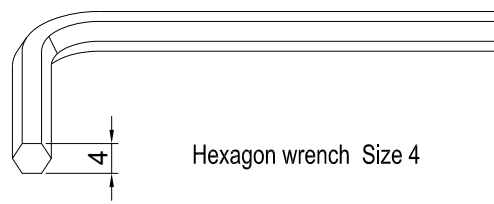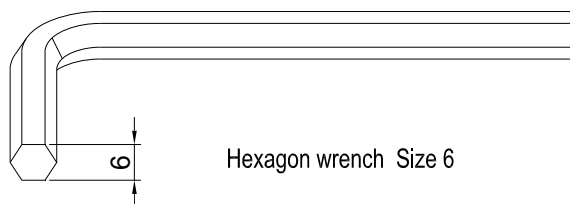


Assembly Processes


1. Assembling column support with 4 pieces of the bolt(M8×20) 、 4 pieces of the shim (M8) and 4 pieces of the square nut (M8)

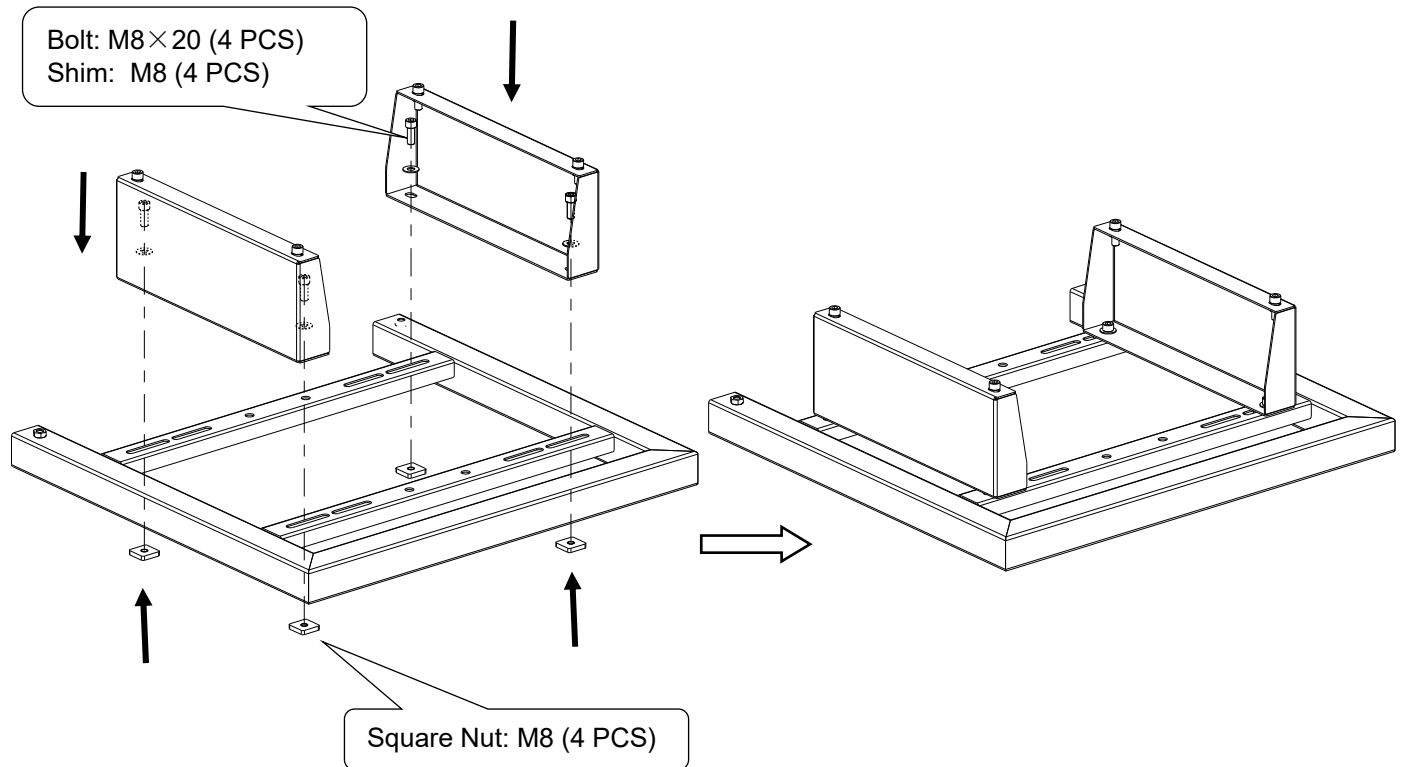


2. Assemble the connection bracket with 2 pieces of the Handle Bolt (M8×15)

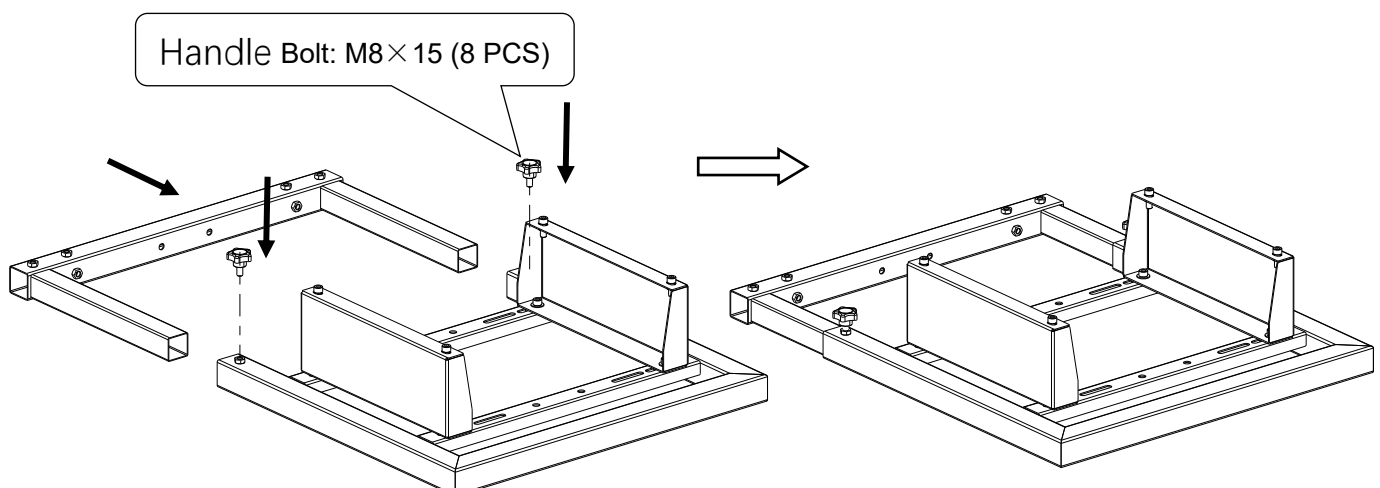


3. Assemble the gear mounting bracket with 3 pieces of the bolt(M8×20) 、 3 pieces of the shim (M8) and 5 pieces of the Handle Bolt (M8×15) ,If you play racing games

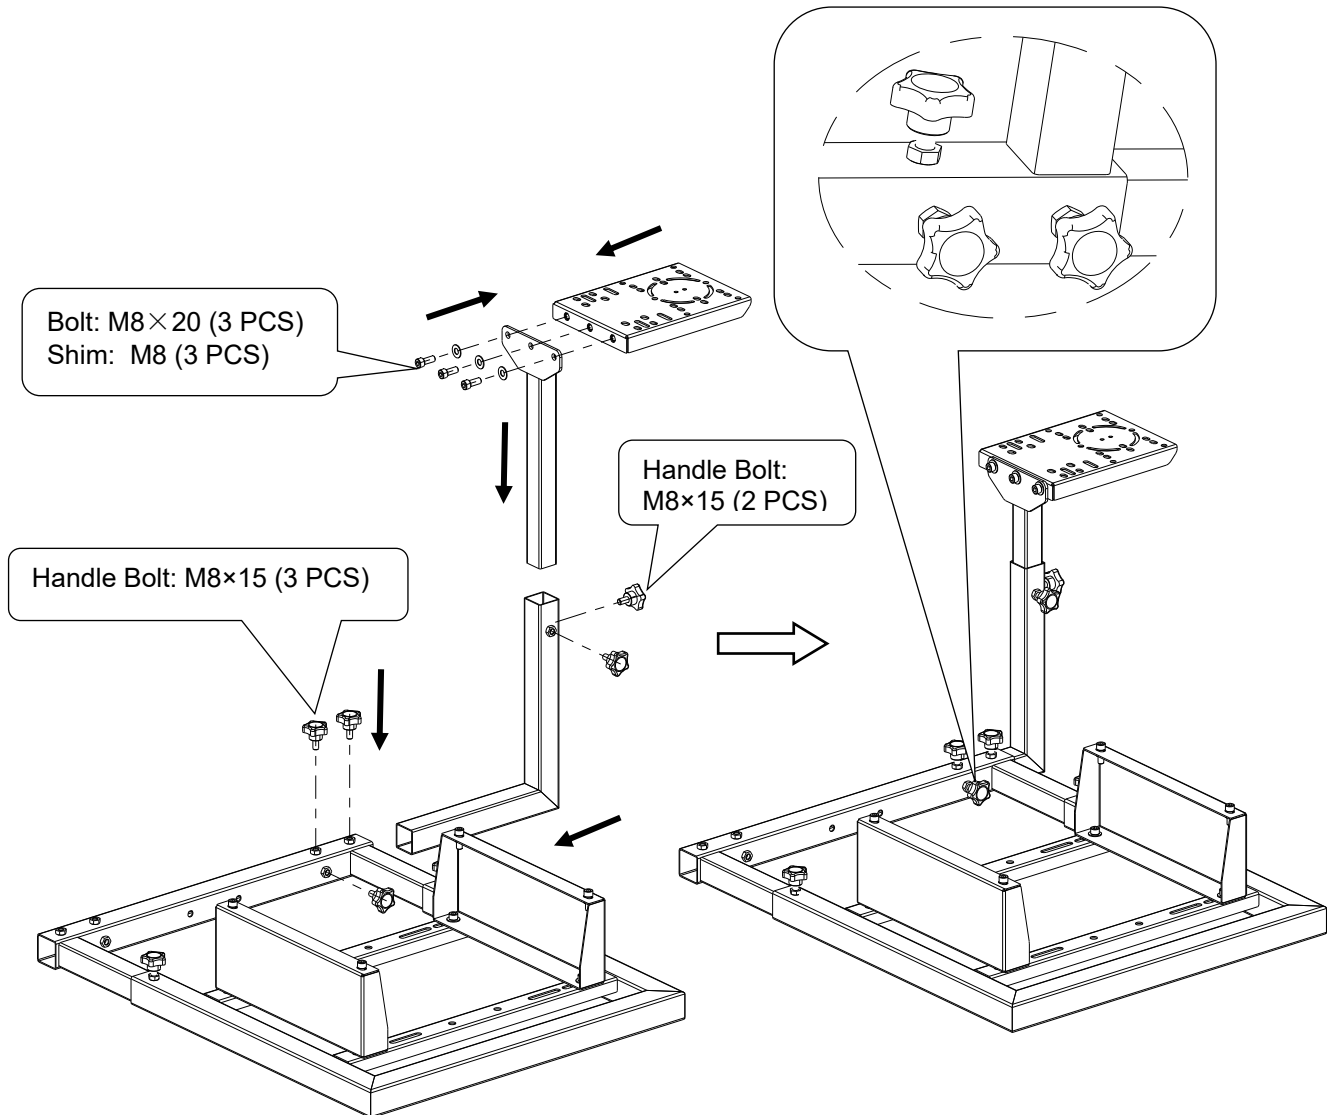

4. Assemble the left and right fixing plates with 6 pieces of the bolt(M8×20) 、 6 pieces of the shim (M8) and 10 pieces of the Handle Bolt (M8×15) , if you need to play flight games

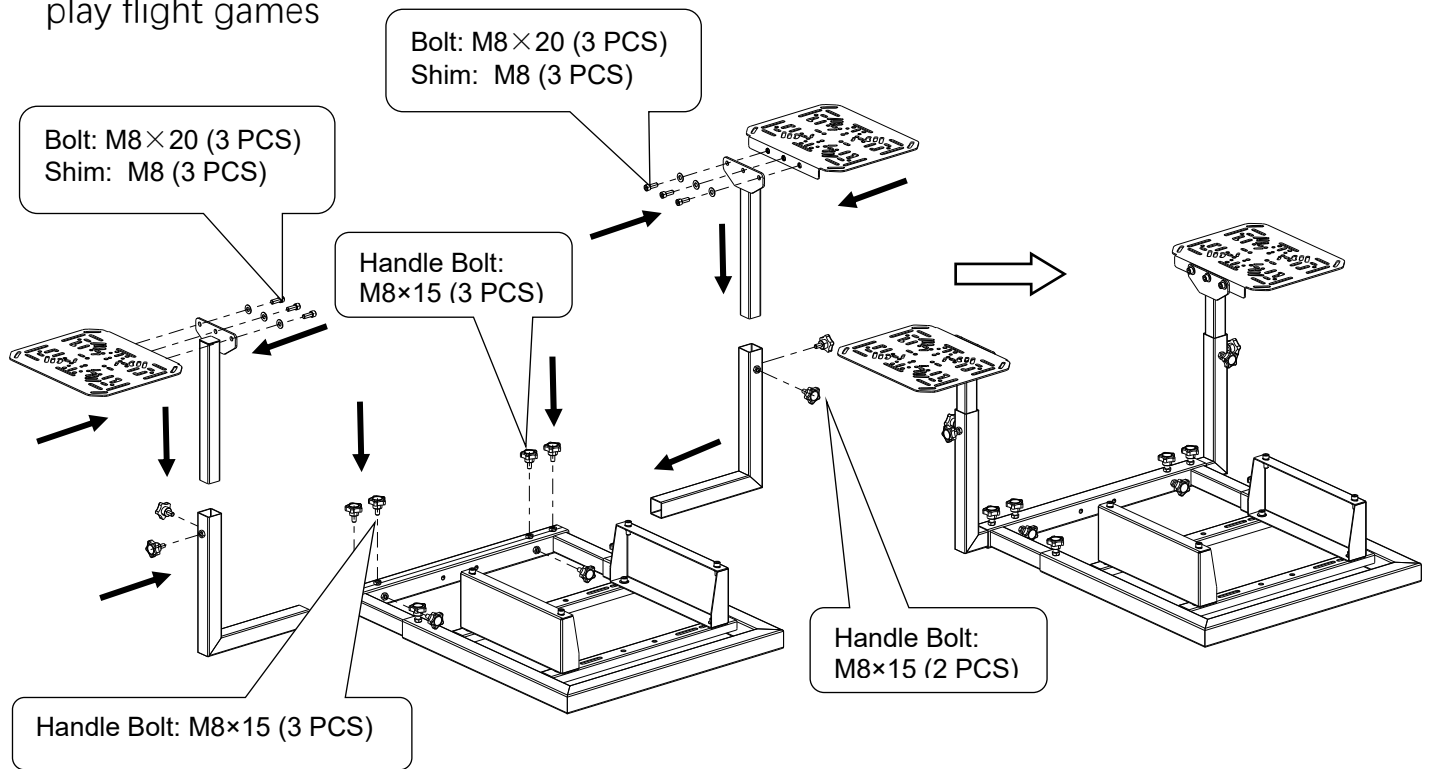


5. Assemble the flight rocker bracket with 2 pieces of the bolt(M8×55) 、 2 pieces of the shim (M8) 、 2 pieces of the nut (M8) and 4 pieces of the Handle Bolt (M8×15) , if you need to play flight games

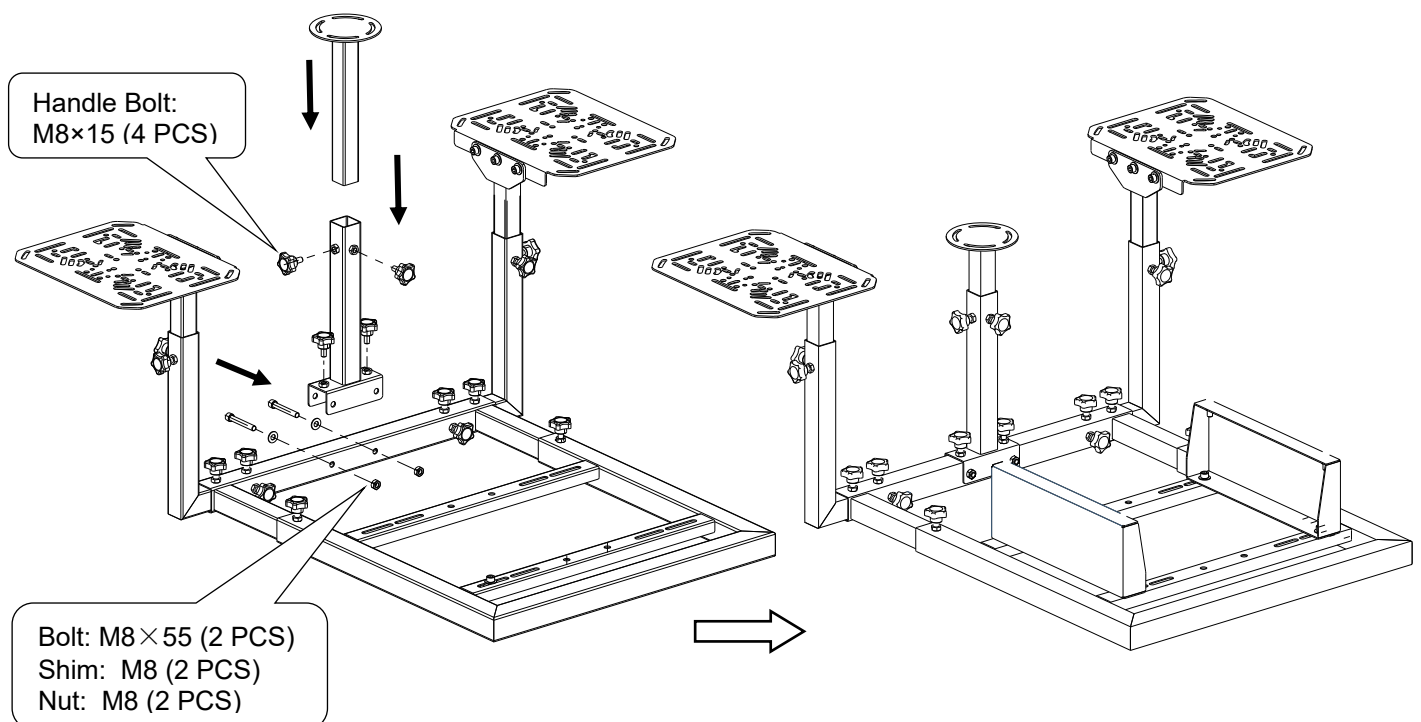


GS42


Product Assembly Manual

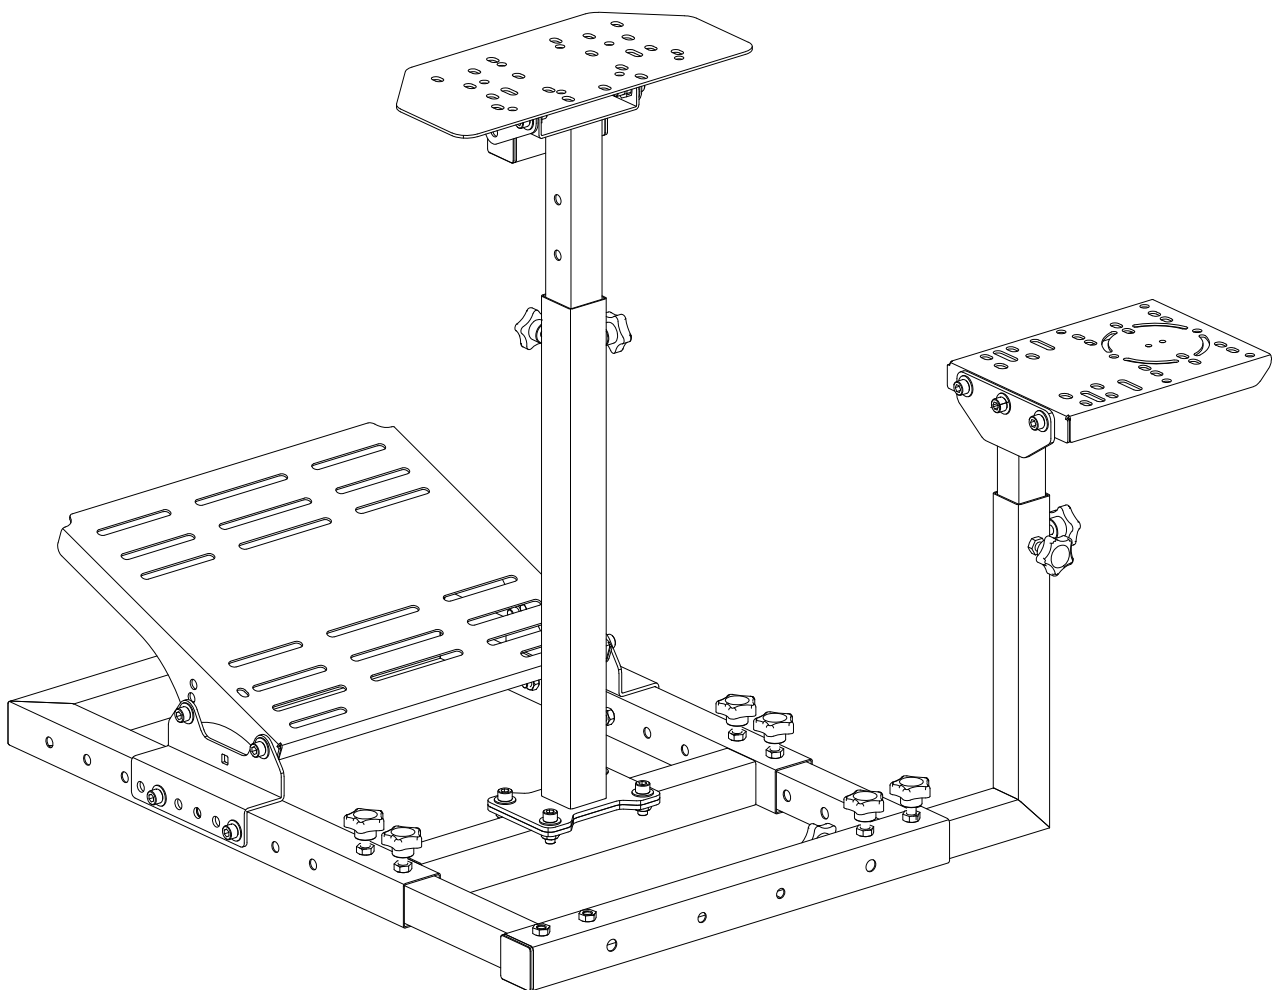


accessories explanation

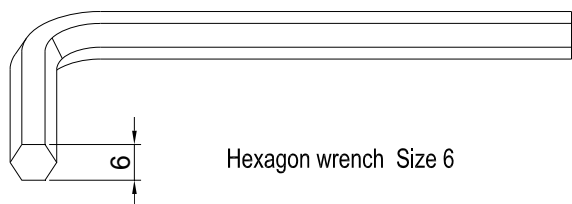


Hexagon wrench Size 6

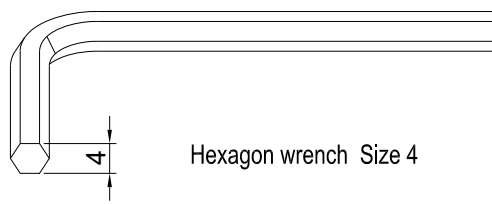


Hexagon wrench Size 4

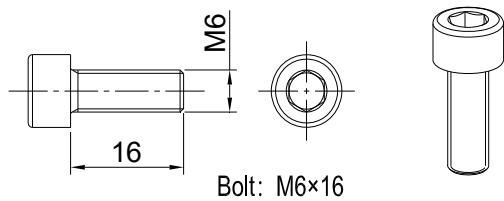


Bolt: M6x16

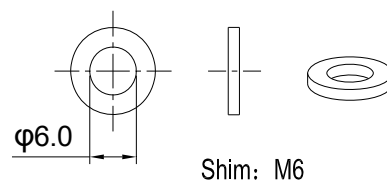


Shim: M6

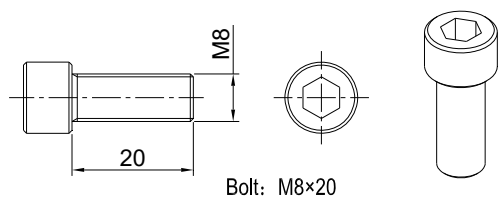


Bolt: M8x20

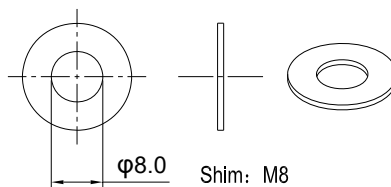



Shim: M8

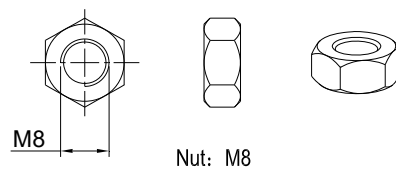


Nut: M8

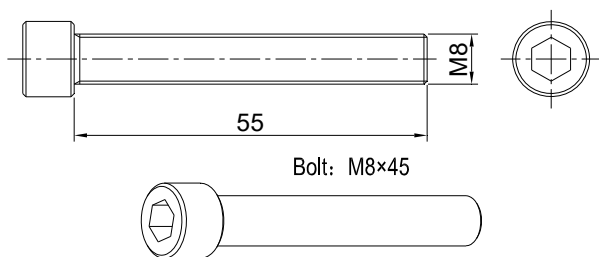

Bolt: M8x45

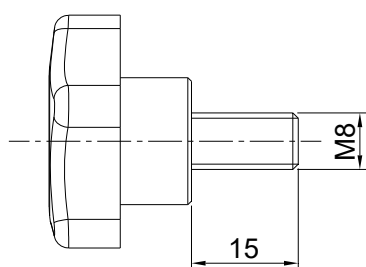


Handle Bolt: M8x15

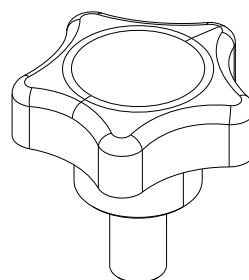


Assembly Processes


1. Assembling column support with 4 pieces of the bolt(M8×20) 、 4 pieces of the shim (M8) and 4 pieces of the nut (M8)

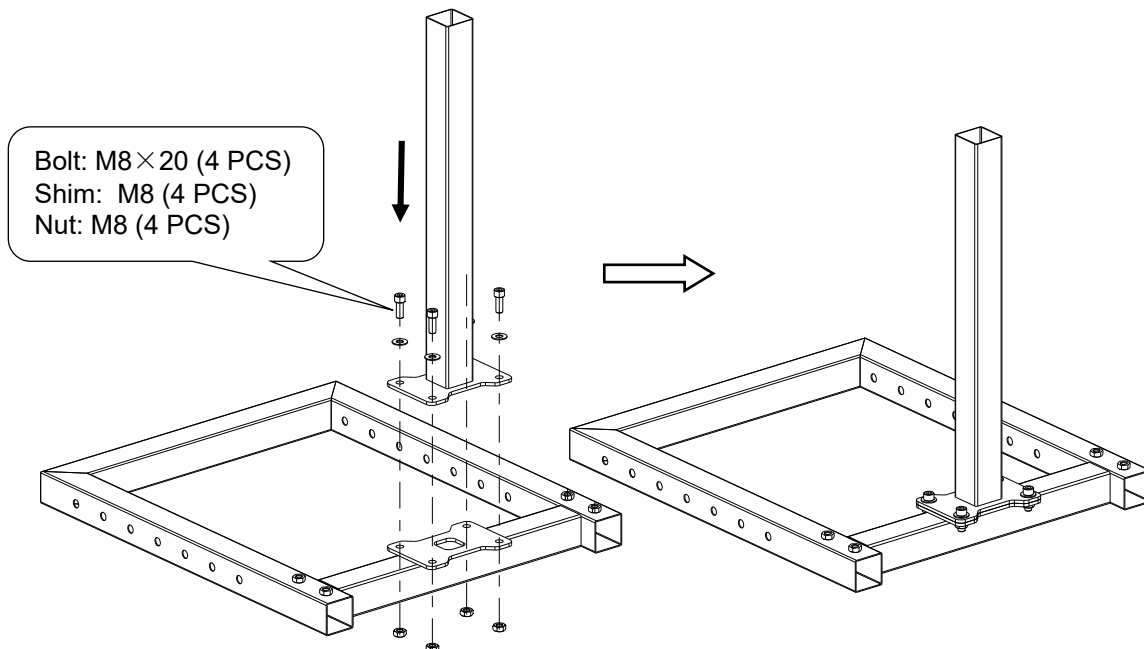


2. Assemble the connection bracket with 2 pieces of the Handle Bolt (M8×15)

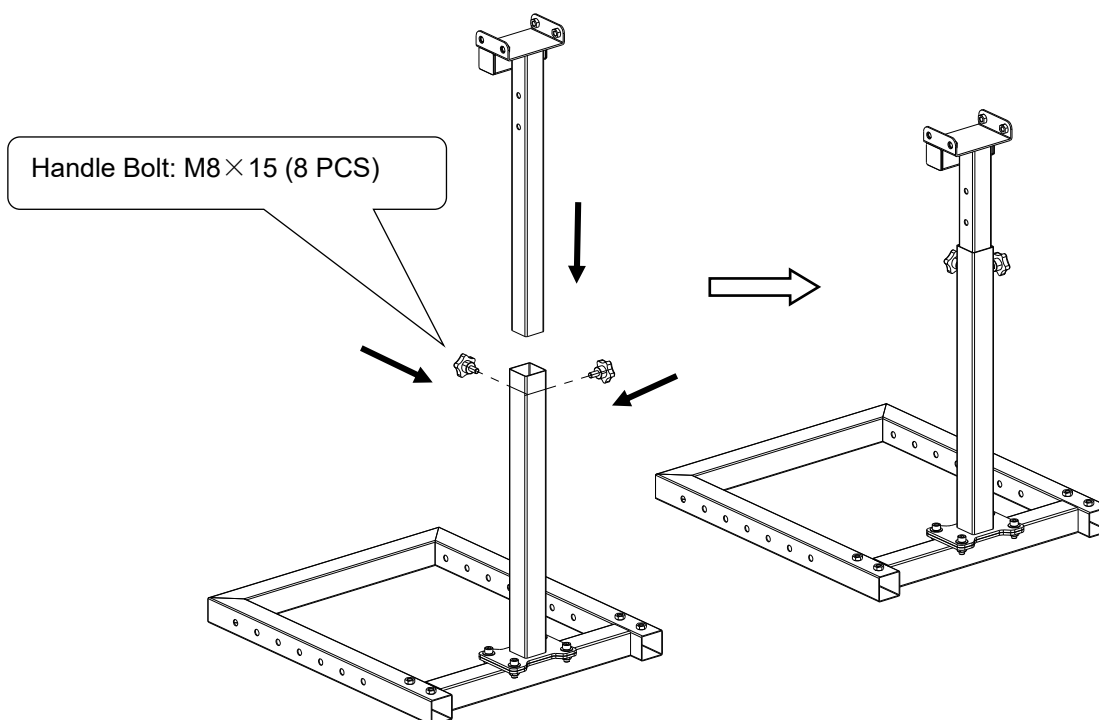


3. Assemble steering wheel support with 4 pieces of bolt(M8×20) and 4 pieces of the Shim (M8)

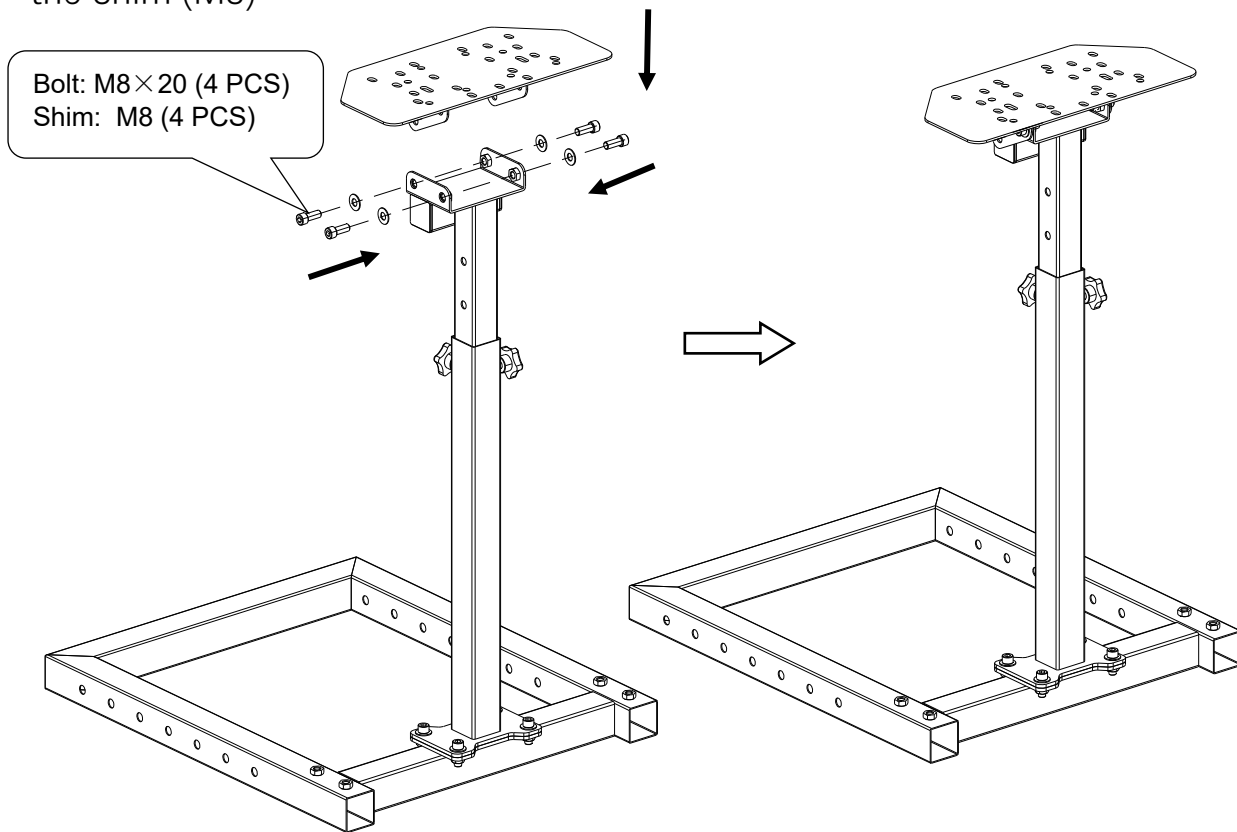

4. Assemble rear connection bracket with 4 pieces of the Handle Bolt (M8×15)

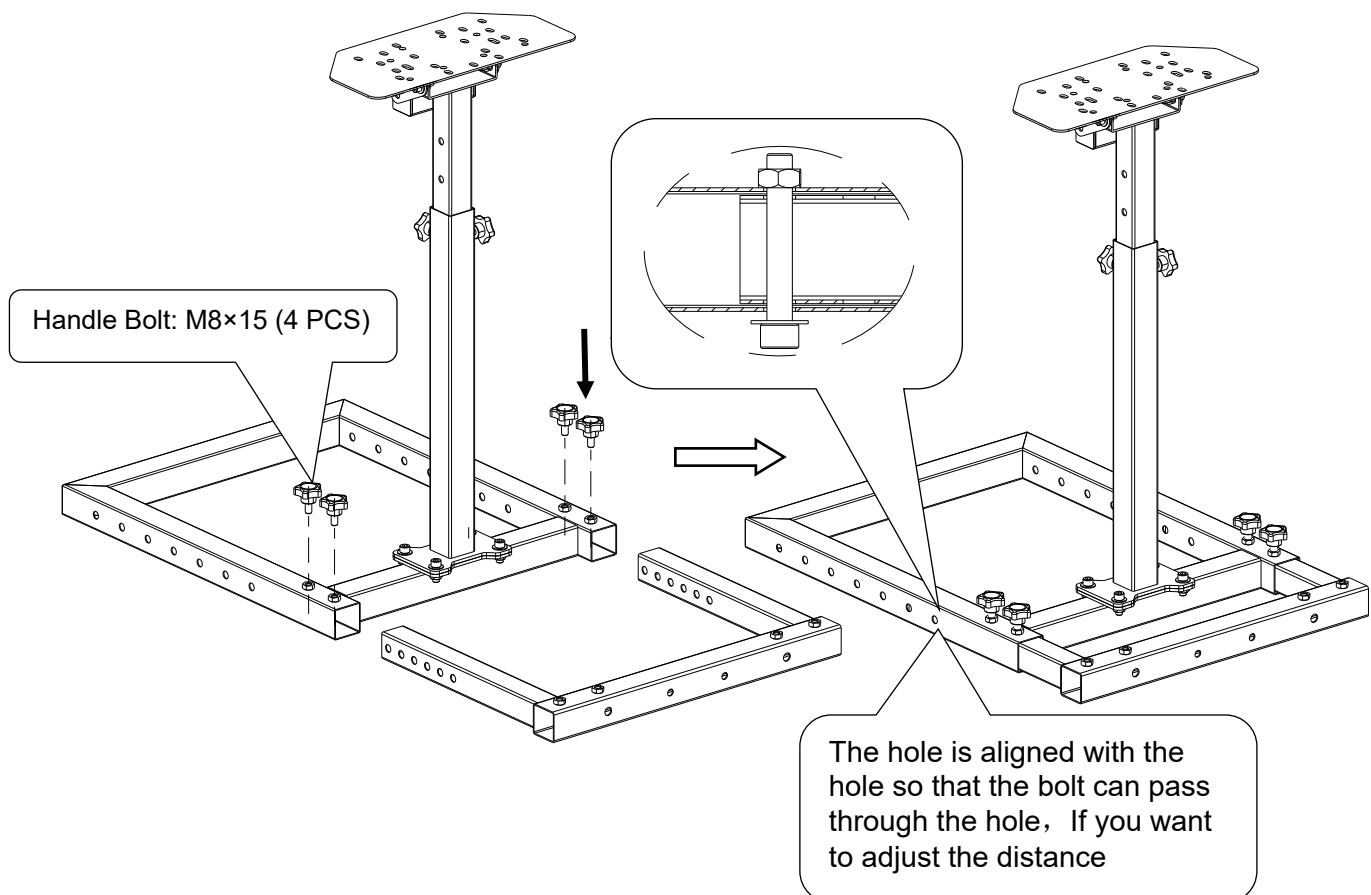

5. Assemble pedal fixing bracket with 4 pieces of the bolt(M8×20) 、 4 pieces of the bolt(M8×55) 、 8 pieces of the shim (M8) and 6 pieces of the Nut (M8)

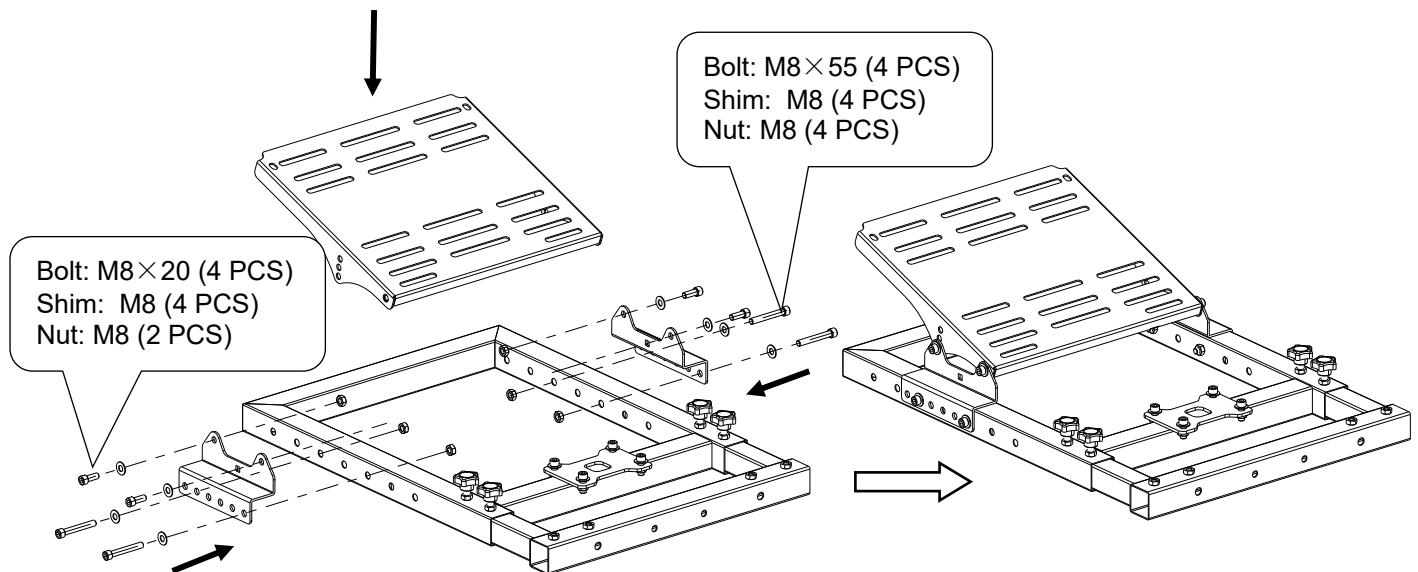

6. Assemble the gear mounting bracket with 3 pieces of the bolt(M8×20) 、 3 pieces of the shim (M8) and 5 pieces of the Handle Bolt (M8×15) ,If you play racing games

