



SILVERSTONE®
Designing Inspiration

OP SERIES

OP1000

Power beyond conventional restrictions

Class-leading single +12V rail with 80A
1000W continuous power output rated up to 50°C

Six PCI-E 6pin connectors

Dual PCI-E 8pin connectors

Six serial ATA connectors

Active PFC

Support ATX 12V 2.2 & EPS 12V

SPECIFICATION

SilverStone OP1000 Switching Power Supply Active PFC

1. Input Requirements

1-1. Input Voltage

The power supply shall be operated at universal input voltage defined in the following table.

Input Voltage	Min.	Nom.	Max.
Voltage	90	100-240	264

1-2. Frequency

The input frequency range is from 50Hz to 60Hz.

1-3. Inrush Current

The max inrush current is 160A for 230VAC 90A for 115VAC.

1-3-1. Cold Start

Conditions	Limits
115/230VAC, full load. 25°C ambient.	No component over stress or damage should occur to the power supply.

1-3-2. Warm Start

Conditions	Limits
Turn off at 132/264VAC full load for 1 sec then turn on at the peak of the input voltage cycle at 25°C	No component over stress or damage should occur to the power supply.

1-4. AC Input Current

AC Input	MAX	Units
100~240V	9~16	AMPS

1-5. Efficiency

Power supply typical efficiency is 80% under full Load at nominal input voltage of 115VAC or 230VAC.

2. Output Requirements

2-1. Output Regulations

Output Voltage	Range	Min.	Nominal	Max.	Unit
+5V	$\pm 5\%$	+4.75	+5.00	+5.25	Volts
+12V	$\pm 5\%$	+11.40	+12.00	+12.60	Volts
-12V	$\pm 10\%$	-10.80	-12.00	-13.20	Volts
+3.3V	$\pm 5\%$	+3.14	+3.30	+3.46	Volts
+5Vsb	$\pm 5\%$	+4.75	+5.00	+5.25	Volts

Note : 1). The above voltage range should also include ripple and noise.

2). The output voltage should be measured at the terminals of output connector.

2-2. DC Load Requirements

Output Voltage	Min.	Nom.	Max.	Unit
+5V	1.0	20	40	AMPS
+12V	4.0	40	80	AMPS
-12V	0.0	0.4	0.8	AMPS
+3.3V	1.0	15	30	AMPS
+5Vsb	0.0	2	4	AMPS


Note : 1). The maximum continuous total DC output power shall not exceed 1000 Watts.

2). The maximum continuous combined load on +5V and +3.3V outputs shall not exceed 200 Watts.

3). The maximum continuous combined load on +5V, +3.3V and +12V outputs shall not exceed 980 Watts.

2-3. Cross Regulation

The DC loads shall remain within the ranges specified in 2-2 DC Load Requirements and the DC output voltages also shall remain within the regulation ranges specified in 2-1 Output Regulation when measured at the load end of the output connectors.

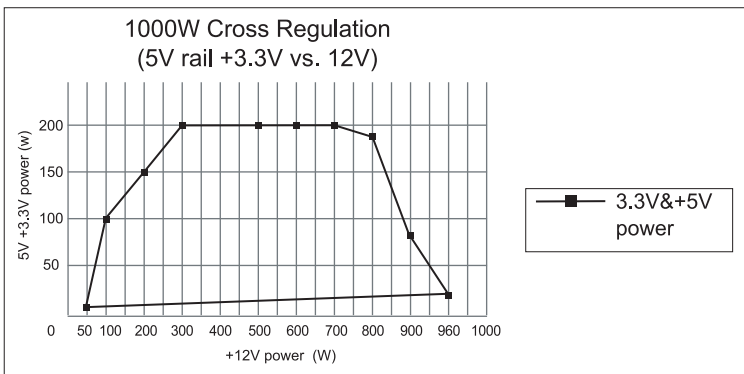

2-4. +5V standby voltage

The +5Vsb is on whenever the AC power is present.--

2-5. DC Output Voltage Ripple and Noise

Output Voltage	Ripple & Noise Max	Units
+5V	50	mV
+12V	120	mV
-12V	120	mV
+3.3V	50	mV
+5Vsb	50	mV

Note : 1). The measurements should be made by crossing a 10uF/ electrolytic and a 0.1uF ceramic disk capacitors at each output with measuring bandwidth from DC to 20 MHz. If ambient temperature is under 20°C or over 30°C, the AC input should be nominal input.


2-6 Total Output Power

MAX	Units
1000	Watts

2-7. Remote ON/OFF Control

The power supply outputs shall be enabled with an active-low TTL signal. When TTL signal is low, the DC outputs are to be enabled. When TTL signal is high or open circuited, the DC outputs are to be disabled. Electronic means or a mechanical switch may activate the TTL signal. After the TTL signal is active high, must wait for 3 seconds before active low again.

2-8. Power Sequence

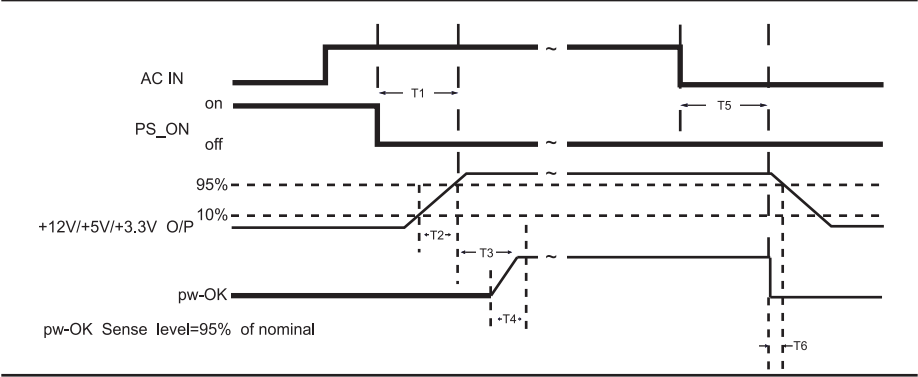

2-9. Power On Time (T1)

MAX	Units
1000	ms

2-10. Rise Time (T2)

MIN.	MAX.	Units
1.0	50	ms

2-11. Power Good Delay Time (T3)

MIN.	MAX.	Units
100	500	ms

The test environment is 25°C condition @ nominal input.

2-12. Power Good Rise Time (T4)

MAX	Units
10	ms

2-13. Hold Up Time (T5)

MIN	Units
16	ms

The test environment is 25°C & full load condition @ nominal input

2-14. Power Fail Signal (T6)

Power good signal shall go to a down level 1ms before +5V output voltage falls below the regulation limits during PS-ON signal pull high.

MIN	Units
1.0	ms

3. Protections

3-1. Over Voltage Protection

When the DC outputs (+5V, +12V, +3.3V, -12V, +5VSB) have over voltage condition, the power supply shall provide latch mode over voltage protection.

DC output	Max.	Unit
+12V	15.5	V
+5V	6.5	V
+3.3V	4.6	V
-12V	-15.5	V
+5VSB	6.5	V

3-2. Short Circuit Protection

A short circuit placed to ground shall cause no damage or power supply shall be shutdown. (The contact resistance is 0.05 ohm when the outputs short circuit.)

3-3. Protection Reset

When the power supply latches into shutdown condition due to a fault on an +5V, +3.3V, +12V output (OVP, UVP), the protection shall reset after the fault has been removed, use remote on/off control or recycle the AC power again for a typical of 5 seconds.

3-4. Over Shoot

Any output overshoot at turn on shall be less than 15% of the nominal output value (with resistive load) as described in sec. 2.1.

3-5. Over Power Protection

At 115/230Vac input the power supply will shut down all DC output within 110% to 150% of full load.

4. Environment

4-1. Operation/Storage Temperature Range

Operation : 0°C to 50°C (nominal input)

Storage : -40°C to 70°C

4-2. Humidity (none condensing)

Operation: 20% to 85% RH (nominal input)

Storage : 10% to 95% RH

5. Safety

5-1. UL60950-1,

5-2. TUV EN 60950-1

5-3. CB

6. EMI REQUIREMENTS

6-1. CE

6-2. BSMI

6-3. FCC part 15 sub part J class B at system load

6-4. CISPR 22 CLASS B

7. Dielectric Voltage Withstand (HI-POT)

The power supply shall withstand for 3 seconds without breakdown the application of an 1800Vac-supply voltage applied between both input line and chassis (10mA AC Cutoff current). Isolating transformers shall similarly withstand 4242Vdc applied between both primary and secondary windings for a minimum of one minute.

8. PFC

Active Power Factor Correction, complies with EN 61000-3-2: 1995+A1+A2:1998, Class D.

9. Electrostatic Discharge (ESD)

Comply with IEC 61000-4-2.

10. EFT/ Burst

Comply with IEC 61000-4-4.

11. Surge

Comply with IEC 61000-4-5.

12. Burn-In

Applying 115 Vac $\pm$ 10 % or 230 Vac $\pm$ 10% input voltage and maximum load (80%) for this product in 45 $\pm$ 5 °C chamber.

13. M.T.B.F.

The power supply shall have a minimum mean time between failure greater than 100,000 hours at continuous operation of 100% load and an ambient temperature of 25°C .

14. Dimension.

150(W)X86(H)X 220(D) mm.



To be valid, this sheet must be filled out by
your salesperson at the time of purchase.

Store :

Purchaser :

Purchase date :

Model No. :

Serial No. :

SILVERSTONE

SilverStone Technology Co., Ltd.

www.silverstonetek.com

support@silverstonetek.com

Issue date: October, 2007

NO:G11202581