

Solar-Powered Floodlight Pan/Tilt Security Camera Kit

Tapo C615F KIT

works with alexa

works with Google Home

2K
Resolution



Wire-Free Easy Installation with Smart Lighting

800-Lumen Dimmable Floodlight	Solar Charging, Maintenance-Free	Free Person/Pet/Vehicle Detection	360° AI Tracking	Color Night Vision
-------------------------------	----------------------------------	-----------------------------------	------------------	--------------------

// Highlights

Go Where Wires Can't with Smart Lighting

Enhance your security with customizable 800-lumen floodlight while not being limited to power outlet placement. Monitor your property day and night.



// Highlights

All-in-One Floodlight and Camera

The compact camera kit features an 800-lumen floodlight that illuminates your property, keeping your space bright and your neighbors undisturbed.



Dimmable Floodlight Control

Set the brightness according to your needs.




Activate with Motion

Activate the floodlight with motion or just control it manually.



Install with Adjustable Angle

Adjust the angle of the floodlight to light up your monitoring area.

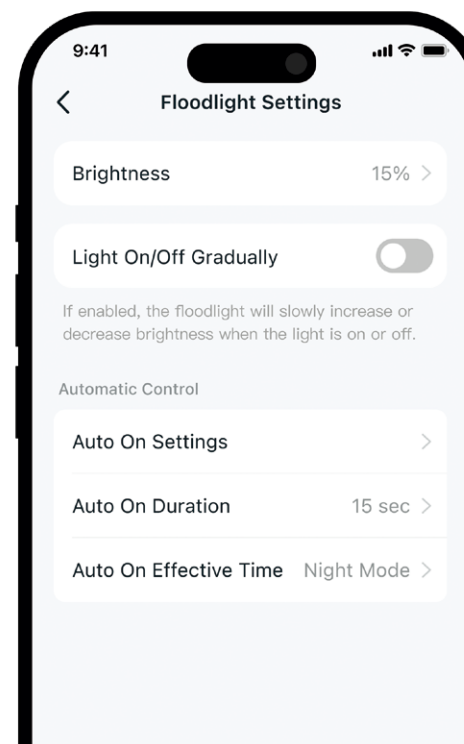

*The app screen shown is for reference only and may differ from the actual final experience.

// Features



Free Person/Pet/Vehicle Detection

The camera identifies people, pets and vehicles while only sending your alerts when truly needed.



360° AI Tracking

The camera provides 360° coverage and tracks people, pets, and vehicles automatically.



High-Efficiency Solar Charging

Just 45 minutes of direct sunlight* powers Tapo C615F for full-day use.



Patrol Mode

Assign points for the camera to patrol for dynamic monitoring.



Customizable Sound and Light Alarm

Record custom audio for alarms and adjust the brightness of the floodlight to suit your needs.



Local and Cloud Storage

Store footage on a microSD card (up to 512 GB)[†] with no subscription required, or opt for cloud storage[‡] with a 30-day free trial for added convenience.



Smart Playback

Swiftly find and download moments of interest by choosing the event type or sliding the timeline.



Privacy Lock

Secure your microSD card with a password through the Tapo app for enhanced privacy protection.



Two-Way Audio

Talk and listen through the device with its integrated microphone and speaker.

[†]microSD card purchased separately. Actual storage capacity depends on the size of the microSD card used.

[‡]Subscribe for cloud storage at <https://www.tapo.com/tapocare/>

[‡]45 min of sunlight is based on standard environmental conditions (1000W/m², 25°C, AM1.5) and specified working scenes (up to 100 events triggered per day). Actual required time of sunlight may vary.

^{**}Actual charging power may vary based on installation location, weather conditions, temperature, and other environmental factors.

Specifications are subject to change without notice. All brands and product names are trademarks or registered trademarks of their respective holders.

// Specifications

Camera	Image Sensor	1/2.8" Progressive Scan CMOS Sensor
	Lens	Focal Length: 4 mm ± 5% Aperture: F1.6 ± 5% Field of View: 100.6° (Diagonal), 84.4° (Horizontal), 44.3° (Vertical)
	Pan-Tilt Range	Pan Mechanical Range: 338° (360° Pan Coverage) Tilt Mechanical Range: 97° (141° Tilt Coverage)
	Night Vision	2× 850 nm IR LEDs (32.8 ft / 10 m) Color Night Vision
	Day/Night Switch	IR-Cut Filter with Auto-Switching
	Lighting	2× Built-in Spotlights 1× Floodlight (Brightness: 800 Lumens) Motion Activated, App-Controlled
	Interface & Button	1× POWER Button 1× RESET Button 1× microSD Card Slot (Up to 512 GB)
Solar Panel	Connection Capacity	A solar panel can only connect to one camera.
	Output Port	Type-C
Video & Audio	Maximum Resolution	2K 3MP (2304 × 1296 px)
	Frame Rate	15/20 fps
	Digital Zoom	10.8×

Video & Audio	Video Compression	H.264
	Live View	Yes
	Image Enhancement	3DNR
	Audio Input & Output	Built-in Microphone and Speaker
	Audio Communication	Two-Way Audio with Noise Cancellation
	Siren Volume	91.5 dBA (Level measured at 10 cm distance) 75 dBA (Level measured at 3 m distance)
Storage	Local Storage	microSD Card Slot on Camera (Up to 512 GB, Purchase Separately)
	Cloud Storage	Tapo Care Cloud Storage Services (Subscription required)
Detection & Notification	AI Detection	Motion Detection Person Detection Vehicle Detection Pet Detection
	Activity Zones	Yes
	Output Notification	System Notification System Notification with Snapshot (Tapo Care Services) System Notification with Clip (Tapo Care Services)
Network	Network Connectivity	Connect via Wi-Fi
	Wireless Connectivity	IEEE 802.11b/g/n, 2.4 GHz Wi-Fi

Network	Transmission Rate	11b: 11 Mbps 11g: 54 Mbps 11n: 72.2 Mbps
	Protocol	TCP/IP, DHCP, ICMP, DNS, NTP, HTTPS, TCP, UDP
Security	Security	WPA/WPA2-PSK WPA3-PSK
Power	Power Source	Built-in Rechargeable Lithium-ion Battery Solar Panel: Tapo A201(included)
	Solar Panel Max Charging Voltage	5.2 V
	Solar Panel Max Charging Power	2.5 W**
	Input Voltage	5 V, DC
	Power Cord Length	USB Charging Cable Length: 0.5 m (19.68 in.) Solar Panel Extension Charging Cable Length: 3.8 m (149.61 in.)
	Camera Typical Power Consumption	1.04 W
	Camera Maximum Power Consumption	11.28 W
General	Smart Integration	Google Assistant, Amazon Alexa
	Weather Resistance	IP65

General	Mounting Options	Wall-Mounted/Eave-Mounted/ Pole-Mounted (Pole-Mounting loops required but not included)
	Operating Temperature	-20 °C ~ 45 °C (-4 °F ~ 113 °F)
	Charging Temperature	0 °C ~ 45 °C (32 °F ~ 113 °F)
	Storage Temperature	-40 °C ~ 60 °C (-40 °F ~ 140 °F)
	Operating Humidity	10% ~ 90% RH, Non-condensing
	Storage Humidity	0 %~ 90% RH, Non-condensing
	Mounting Screw Size	
	Dimensions	Camera Dimensions: 132.86×82×161.1 mm (5.23 x 3.22 x 6.34 in.) Solar Panel Dimensions: 173.42×120.42×15.7 mm (6.82 x 4.74 x 0.61 in.)
	Weight	Camera: 24.06 oz / 682 g Solar Panel: 5.08 oz / 144 g
Package Contents	Tapo C615F Camera × 1 Tapo A201 Solar Panel × 1 Tapo A201 Solar Panel Bracket × 1 Base Cover × 1 USB Charging Cable × 1 Solar Extension Cable × 1 Mounting Template Stickers × 2 Mounting Screws and Anchors Quick Start Guide	