

Emergency start power supply & air pump

## User Manual

# catalogue


<b>1. Product Overview</b>	01
1.1 Product description	01
1.2 Function display area	01
1.3 Display and key	02
<b>2. Packing list</b>	03
2.1 Standard configuration	03
<b>3. Type parameter</b>	04
<b>4. Usage method</b>	05
4.1 Aeration guide	05
4.2 Jump-Starter guide	07
4.3 Charge and discharge	09
4.4 Lighting operation	09
<b>5. Troubleshooting guide</b>	09
<b>6. Safety statement</b>	11
6.1 Matters needing attention	11
6.2 Product care Tips	13
<b>7. Disclaimer</b>	13

# 1. Product Overview


## 1.1 Product description

This product is a car jump starter with air compressor multi-functional machine. It can give the car that can not start due to battery loss for emergency ignition, and pump for car tires. With USB output, it can charge mobile phones, tablet computers and other devices, while having emergency lighting function.

## 1.2 Functional area display



1. Display
2. Lighting
3. Switch
4. Air pressure +



5. Unit adjustment
6. Air pressure -
7. Type-C input port
8. USB output

## 9.LED lights

## 10.EC5 interface

## 11. Inflation hose jack

### 1.3 Display and button



### Function of button

	Press and hold the Switch button for 2 seconds to power on
	Press and hold the "Switch" button for 2S to shut down the machine. In non-working state, the machine will shut down automatically for 1 minute
	In the startup state, long press the "Unit adjustment" key to switch between the four units of "PSI, BAR, KPA, KG/CM2"
	In the startup state, click the "Unit Adjustment" button to switch between the five modes: Cars, Motorcycles, Bicycles, Basketball, Pressure protection
	In the startup state, press + or - to set the target pressure value, or hold down to set the pressure value in quick succession
	In the startup state, press the light button, LED lighting. Press the button the second time, the red and blue lights flashing. Press button the third time, the red light flash. Click again to turn off the light.

## 2. Packing list

### 2.1 Standard configuration



Inflatable electric  
all-in-one machine×1



User Manual x1



USB  
Charging cable×1



Inflation hose×1



Packing box×1



EVA storage bagx1



Swim ring  
changeover head×1



Ball needle  
×1



Rubber boat  
conversion head×1



Presta  
valve x1



Smart battery clip×1


### 3. Type parameter

<b>Product model</b>	QS003
<b>Enter Type-C</b>	5V = 2A
<b>Output USB-A</b>	5V = 2.4A
<b>Charging time</b>	4-5h
<b>Product size</b>	190*95*75 mm
<b>Operating temperature</b>	-20°C~60°C
<b>Battery type</b>	Polymer battery
<b>Shell material</b>	PC\ABS
<b>Standby power consumption</b>	<50μA
<b>enforce standards</b>	Q/BWKJ001-2023


The above data comes from laboratory measurements, but the data may be different or inaccurate due to changes in the objective environment.

## 4. Usage method


### 4.1 Aeration guide




Step 1: Screw on the inflation hose

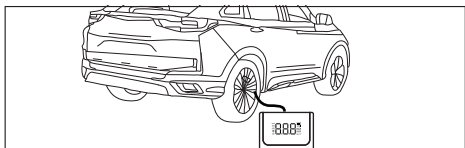

Step 2: Clamp the tire nozzle

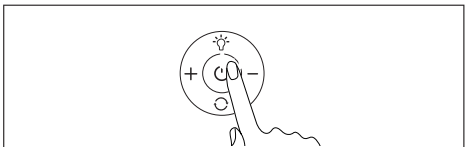


Step 3: Long press the key to start, at this time, the product screen will automatically display the current tire pressure value

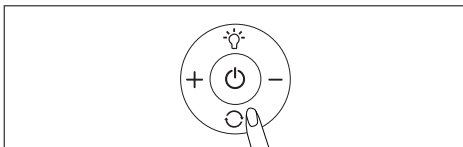

Step 4: Select and press the mode key to switch to car mode. The default tire pressure of car mode is 2.5Bar. You can choose to press “+” or “-” to adjust the appropriate air pressure value


Tips: During the inflation process, the tire pressure value is displayed in real time, and it will automatically stop when it is full.

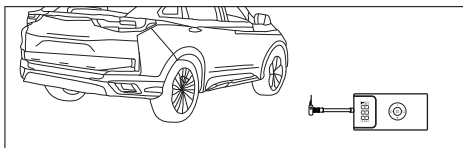


Step 5: Automatically stop when the air pressure reaches the preset value, or press the switch key again to stop the inflation, and remove the air pipe from the car tire and fuselage after the air pipe has cooled

Tips: The machine in the inflatable mode will automatically stop working after using 10 minutes, and the screen shown “8.88” flashing for at least 2 minutes for cooling down purpose. After the screen restores to original state, the machine could start working again.


## 4.2 Jump-Starter guide

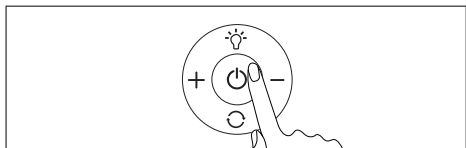

Step 1: Press the power button to power on, check the power, and ensure that the power is sufficient (more than 75% is recommended)




Step 2: Insert Battery clip into the EC5 interface of the product. At this time, the traffic light of the battery clip flashes, indicating the normal operation of the product



Step 3: The red clip fully clamp the positive electrode of the battery, the black clip fully clamp the negative electrode of the battery, (or the black clip clip on the vehicle metal sheet). At this point, the red and green flashing of the battery holder becomes green and steady



Step 4: Start the car and close the door and all electronic devices. Tip: Automatic, step on the brake and start. Manual transmission, need to step on the clutch and brake at the same time, and then start)

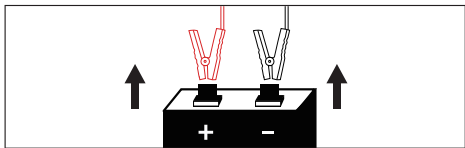


Step 5: After the vehicle starts, please remove the product within 30 seconds. (Tip: First unplug, then remove the positive and negative terminals of the battery clip)

Tip: If the power is not successful, follow the fifth step, remove the battery clip, one minute later, re-operation. Do not start continuously, the start time should not exceed five seconds.

### 4.3 Charge and discharge

#### Charge the product

Connect the USB charging cable to the charging head and connect to the air pump for charging



#### Charge mobile phones, PSP, tablets and other digital products

Press the power button to power on, and then connect the USB charging cable to the USB output, you can charge mobile phones, PSP, tablet computers and other digital products

### 4.4 Lighting operation

In the startup state, press the light button, LED lighting. Press the button the second time, the red and blue lights flashing. Press button the third time, the red light flash. Click again to turn off the light.

### 4.5 Pressure holding operation

The default setting value of pressure holding mode is 8PSI. The adjustable range is: 5~150PSI. When the low pressure is below the set value of 5PSI, the inflation will automatically start.

## 5. Troubleshooting guide

We have summarized the suspected faults and common problems that may be encountered when the equipment is used, as follows

Condition	Possible cause	The way to troubleshoot
<b>Unable to boot</b>	Product collision power off protection	Charge activation
	Low battery	Please charge it
	Press the power button	Hold down the power button for about 3 seconds
	Charging	The charging state fails to turn on. Remove the charging cable
<b>Unable to charge</b>	The charging cable is not fully inserted into the charging port	Insert the charging cable fully into the charging port, and make sure that the charging port is not loose
	The adapter is not fully plugged into the home socket	Plug the power adapter fully into the home outlet
<b>Failure to connect</b>	Low battery	Please charge for 3-5 hours
	The battery clip is not connected properly, and the battery clip does not recognize the battery	Clamp the battery clamp as much as possible with the battery large area, the contact surface of the battery positive and negative poles is clean, and the indicator light is normal
	The electric appliances and doors in the car are not closed	Turn off the electrical appliances in the car and close the doors when the power is on
	Battery problem	No battery lap or negative electrode lap
	Operational problem	Contact customer service
<b>Unable to inflate on startup</b>	Low battery	Please charge it
	Wrong tire pressure pattern	Set the corresponding device mode correctly
	The buckle of the air pipe is loose	Properly connect the gas pipe and buckle

## 6. Safety statement

### 6.1 Matters needing attention

- ① Before use, please read the product instructions carefully to avoid improper use of the product, which may easily cause the product itself or may endanger the safety of life and property
- ② Please check the power of the machine before use, in order to achieve better use, please ensure that the power is above 75%, charging is recommended to use the special charging cable attached to the product
- ③ Make sure the EC5 plug (smart ignition clip) is fully plugged into the boot power port. Otherwise, the startup performance will be affected, and the plastic part of the interface will have a negative impact, and may even melt
- ④ Do not use the emergency starting power to continuously start the car at high frequency, and the time interval between two ignitions must be greater than 30 seconds. After connecting the intelligent ignition clip and the emergency starting power, please start the car immediately
- ⑤ If the car does not start, check whether the smart ignition clip is not securely connected, or check the surface of the battery connector for rust or dirt, and then start the car after the surface is clean. If it doesn't start after three consecutive attempts, stop forcing your car to start, or it will damage the product
- ⑥ Do not store this product in high temperature and humidity, strong light and strong magnetic field environment, do not place in the fire source and other harsh environment, such as due to the improper use of consumers in violation of product instructions,

resulting in personal and property damage will bear all consequences, the company will not assume any legal responsibility, non-professional personnel are strictly prohibited to disassemble this product

- ⑦ Avoid using electrical appliances or loads that exceed the output current of this product (if forced use will trigger circuit protection, the product has no output)
- ⑧ Avoid strong physical effects, including knocking, throwing, trampling, squeezing, etc
- ⑨ This product is not a toy, it is prohibited for children to use, the user is recommended to be over 16 years old, please keep children and the product at a safe distance during the inflating process
- ⑩ In order to extend the service life of the product, if the product is not used for a long time, it is recommended to charge it at least once every three months
- ⑪ Please use in a dry and clean environment, sand and dust intrusion may cause damage to the product, the product is not waterproof, do not wash with water
- ⑫ High pressure gas will generate heat during aeration, never insert the trachea into the mouth, ear or eye of a person or animal to prevent injury.
- ⑬ In order to ensure the good work of this product, after each 10 minutes of inflation, the machine must stop running for 8 minutes, cool down before use, in order to extend the life. If there is abnormal noise in the inflation or the temperature is too high, please shut down immediately and allow it to cool for at least 15 minutes, and be careful when disassembling the gas pipe

## 6.2 Product care Tips

- ① Keep the instrument dry and do not place it in high temperature or humid environment
- ② Product built-in lithium battery, the battery is prohibited to use after immersion
- ③ If you do not use the product for a long time, please charge and discharge it every 3 months
- ④ Do not disassemble, impact, squeeze or put into the fire

## 7. Disclaimer

The illustrations of the products and accessories in the instruction manual are for illustration reference. There may be slight differences with the actual products. Please refer to the actual products. We may make necessary changes to typographical errors and inaccuracies in this manual at any time without prior notice, but such changes will be incorporated into the new version of this manual.