


# QUICK START GUIDE


## Must Read

1



Remove the **seal tape** on the water tank before use.

2



Compressor may delay **3 minutes** at startup. It's normal for unit protection.

3




Keep all windows and doors **tightly closed** for optimal performance.

4



Recommended to run continuously for the **first 24 hours** of use.


5



### Water Tank

- When the tank is full, the compressor stops and the fan continues running for about 3 minutes. The Full Tank indicator then flashes.
- It's recommended to use hose drainage for high humidity or long operation.

6



### Hose Drainage

- Hose Length: 3.3 ft
- Always keep the drain port sealed when no hose is connected.
- For hose drainage, keep the hose running downward at least 3.94 inches (100 mm) below the drain port.

## Tips

- No worries if the dehumidifier is transported upside down—just place it upright and wait 24–48 hours before plugging it in.
- The flammable symbol is required by safety regulations. The dehumidifier is safe to operate under normal conditions—simply keep it away from open flames or sparks.
- When first powered on, the refrigerant needs 20–30 minutes to circulate. Water collection may be slow initially. Please allow the unit time to operate normally.



We may not be superheroes for life—but we can be your HERO for this dehumidifier. Just reach out anytime.

✉ support@waykar.com 📞 (213)-895-4871



# How to Use

## Check List Before Plugging it In

- Has the unit been kept upright for 24 hours?
- Is there at least 18" of clearance around the unit?
- Is the water tank properly seated?
- Is the room temperature between 41°F–90°F?
- Is the drain hose securely attached? If not using a hose, is the drain cap plugged in?


If everything checks out, plug in the dehumidifier and press [⏻] to turn it on.

## Buttons & Symbols


**Humidity Setting Range: Adjustable between 30% and 80% RH**

In Sleep Mode, the display dims after 1 minute of inactivity and then turns off.

Applicable to CTH80B, CTH120B, and CTH150B

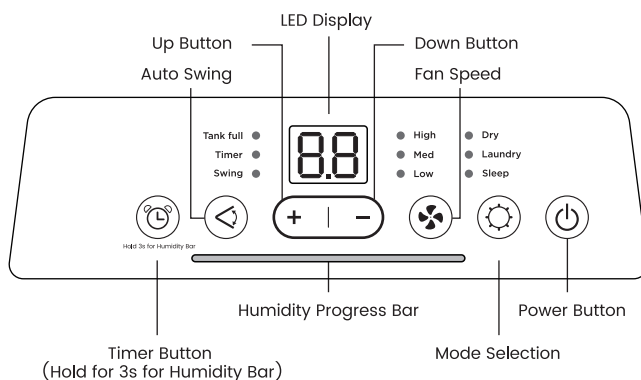

Applicable to CTH150PB (with Pump)

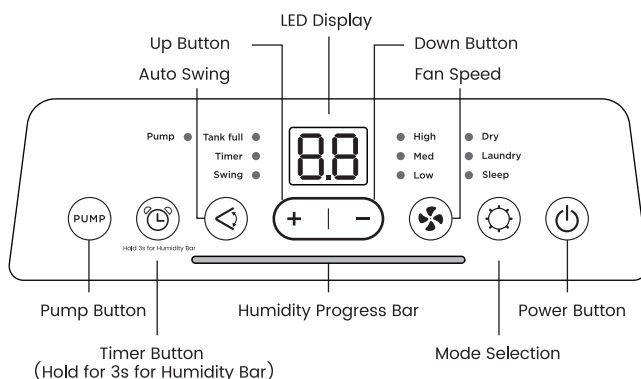

Press and hold the [⏻] button for 3 seconds to enable or disable the Humidity Progress Bar.



## COMMON TROUBLESHOOTING

**Q: Why is the dehumidifier still running when the target humidity has been reached?**

**A:** The compressor will pause when the room humidity drops below your target humidity by more than 5% RH, accounting for the ±5% RH deviation of the humidity sensor.

**Q: Can I connect a garden hose directly to the drain port?**

**A:** Yes. The drain port features a standard 1-1/16" garden hose thread (GHT), so a garden hose can be connected directly.