


WARNING


To help preventing injuries, never use the Object Detection System as a replacement for checking the surrounding pedestrians, cyclists and vehicles. The Object Detection Radar System is not a replacement for careful driving.

1.System overview


Object detection radar means a system to detect and inform the driver of the presence of objects in the close-proximity blind-spot back of the vehicle, if deemed necessary based on manufacturer strategy, warn the driver of a potential collision.

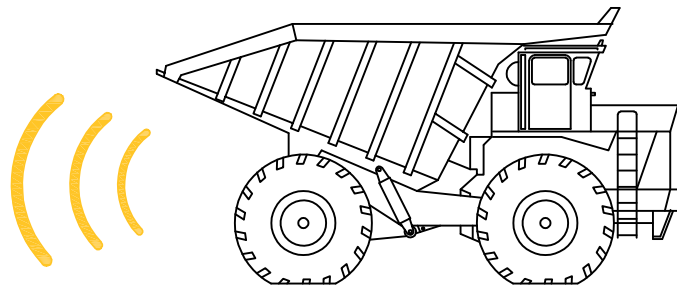

2.Kit Contents

No.	Item	QTY.	Image
1	Radar sensor	1	
2	LED display	1	
3	Sensor bracket	1	
4	Main Harness	1	
5	Extension cable	2	
6	Accessories bag 1	1	M3*8 screw 4pcs M5*12 screw 4pcs M4.8*16 screw 4pcs M5*16 screw 3pcs Cable Tie 10pcs Double side tape 1pc


3. Harness Layout

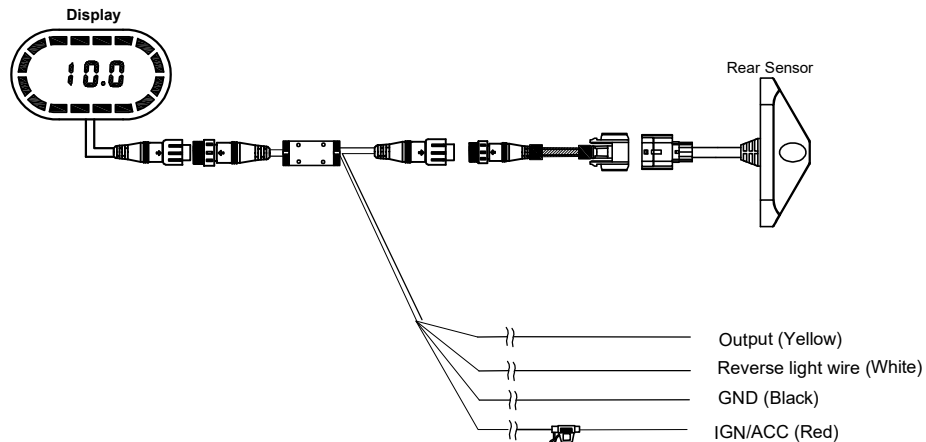

Note:


- 1.If the output cable won't be used, please wrap the cable to avoid short circuit.
- 2.The output is positive, the Max. output voltage is no more than 5V.

4. System Layout

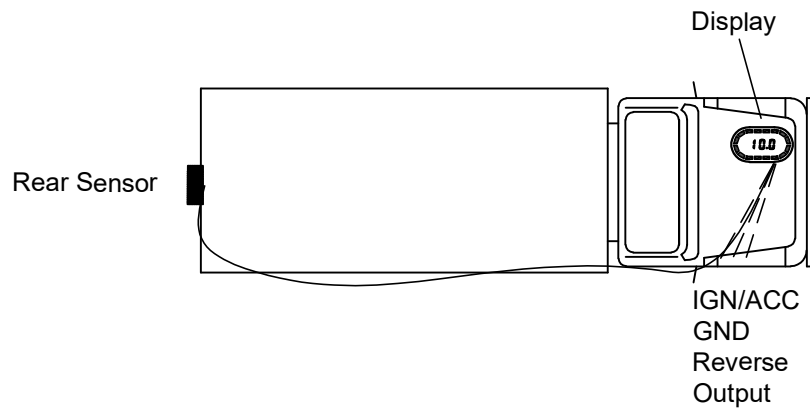


5. Installation

5.1 Installation height

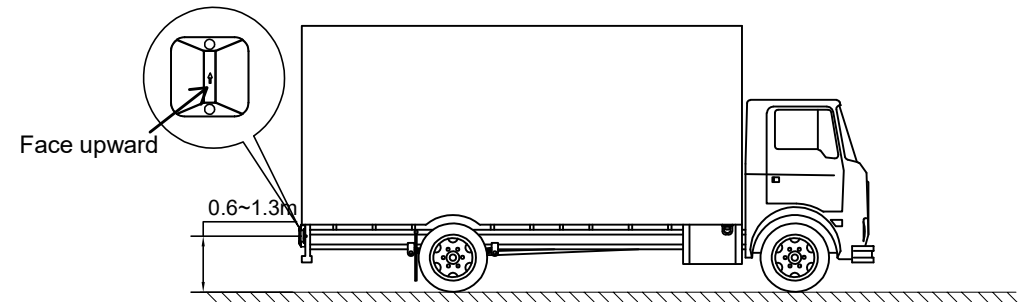


5.2 Requirements for vertical installation angle

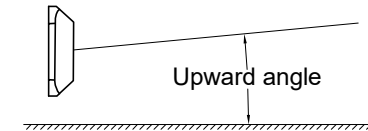

Installation height	Upward angle
0.6 - 0.75m	9°
0.75 - 1.3m	7°

5.3 Sensor fix

The radar is installed on the vehicle body with a bracket, and the vertical installation angle is adjusted through the mounting bracket.

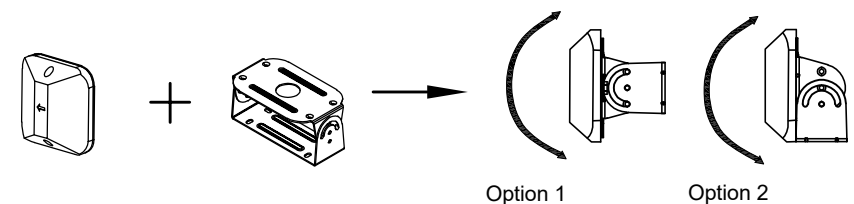

6. Function description


6.1 Self-diagnosis

No.	System status	Display warning method	
		LED bar	Buzzer built in
1	Pass		Beep once (Bi-)
2	Sensor Failed		Beep twice (Bi-Bi-)

6.2 Basic function

When the key is turned to ON, the front radar sensor starts to work;
When the Reverse gear is engaged, the front and rear radar sensors both work.
The LED display will provide audible and visible warnings to driver, the warning principles as below:

- (1) If there's object being detected, the output cable will provide high level voltage; if there's no object being detected, it will output float;
- (2) If the reverse gear is engaged, the display will show the nearest distance of rear detected object;

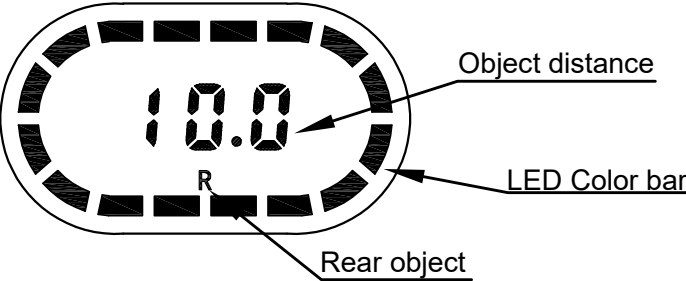

- (3) Display will provide audible and visible warnings:
The display will show the distance of the detected object, and provide warning beep, according the warning section; the warning sections are equally divided into 5 stages. Take the max. detection as 10m, the warning sections will be divided as below:


6.3 Learning function

When the installation position of the radar is not at the outermost side of the vehicle, the radar is easy to detect the accessories of the vehicle or vehicle body, which will result in false alarm. Therefore, in order not to make false alarm, it is necessary to enter into the learning mode to make the radar ignore the object.

Users need to follow the following steps to realize the learning function:

a.Move the vehicle to an open area and confirm that there are no obstacles other than body accessories within (a*b)m of the radar;

- (1) $a1 > 4 * L1$, and $a1 > 3m$;
- (2) $b1 > W1 + W2$, and $b1 > 6m$;

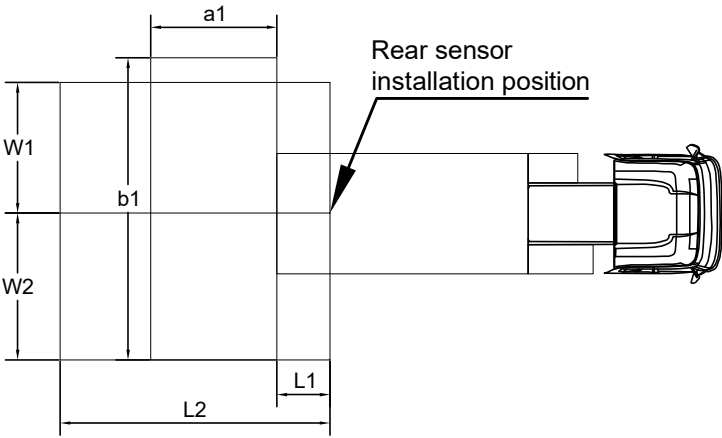

- b.Power on the system and wait for the completion of system self diagnosis;
- c.Constantly press the setup button for 3.0s-4.5s, the buzzer will beep once, the display will show "L0", and enter into the automatic learning function setup mode; Release the button, and then briefly press the key to make the display shows "L2", the system enters into the automatic learning mode, and the learning results are shown after the learning process is completed. If "LS" is shown and beeps once, the learning is successful; if "LE" is shown and beeps twice, the learning is failed.




Item No.	Object distance	Distance showing	Color bar showing	Beep frequency
1	No detection	— —	No. showing	No beep
2	6.1 - 10.0m	6.1-10.0	Green LED bar 	BI----BI----BI BI--BI--BI BIBIBI The closer the distance, the faster the warning frequency
3	4.1 - 6.0m	4.1 - 6.0	Yellowish green LED bar 	
4	2.1 - 4.0m	2.1 - 4.0	Yellow LED bar 	
5	0.81 - 2.0m	0.81 - 2.0	Orange LED bar 	
6	≤0.8m	-P-	Red LED bar 	Constant beep

Note:


Above tracing LED display figure is alarm distance 10m as a reference.




No.3,4,5,6 color bar alarm showing segmentation can be setup by setup tool;

No.2 color bar alarm showing segmentation is the maximum alarm distance value.

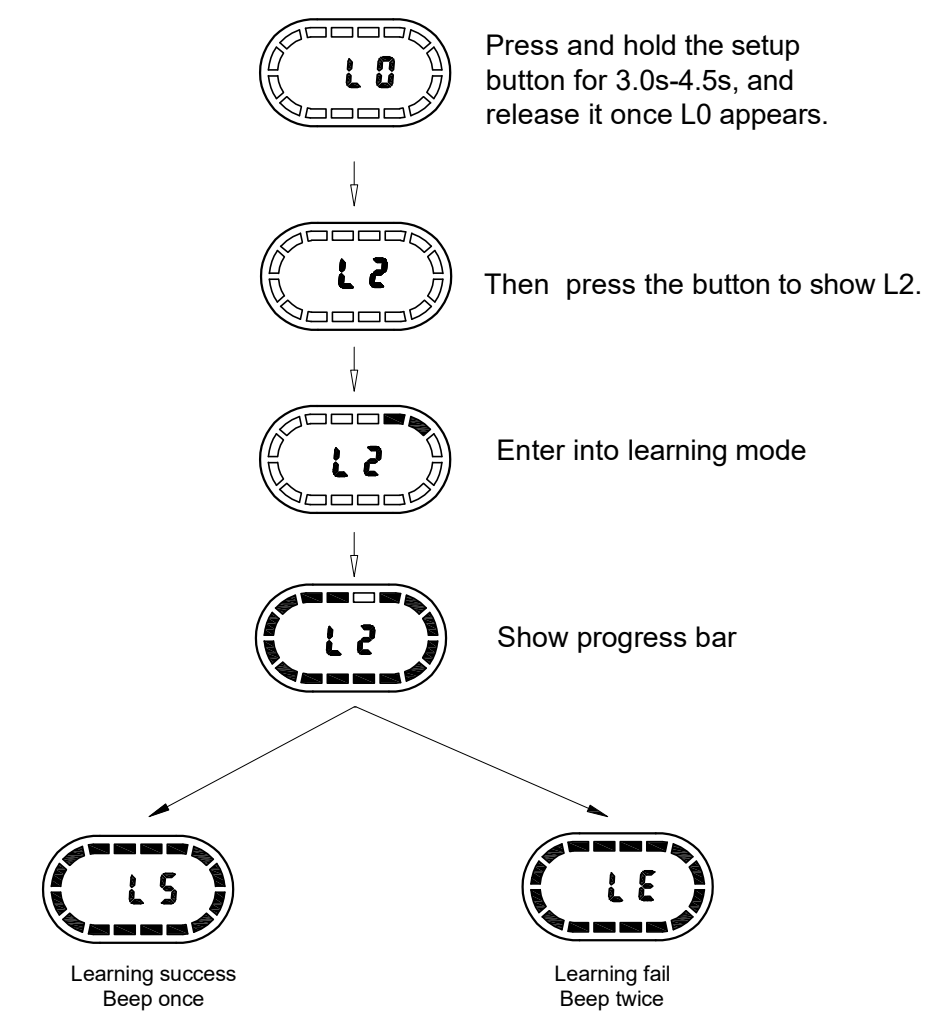

7. Display setup



Setup button	Button pressing time	Setting function	LED bar showing	Definition	Remark
Volume button	0-1.5s	Volume	0	OFF	Shortly press the setup button, the buzzer will beep once and enter into the volume adjustment mode, the display will show the current volume; Each time you press the setup button, 3, 2, 1 and 0 cycle, stop pressing, and the display will automatically save the status and exit. 
			1	Low	
			2	Middle	
			3	High	
Setup button	0s-1.5s	Imperial VS Metric display	F0	Metric	Constantly press the setup button the buzzer will beep once and enter into the display system setting mode, and the display will show the current status; Each time you press the setup button, F0 and F1 cycle, after stop pressing, and automatically save the status and exit. 
			F1	Imperial	
	1.5s-3.0s	Automatic learning function	L0	OFF	Constantly press the setup button the buzzer will beep once and enter into the display system setting mode, and the display will show the current status; Each time you press the setup button, L0, L1 and L2 cycle, after stop pressing, and automatically save the status and exit. 
			L1	Front sensor automatic learning	
			L2	Rear sensor automatic learning	

8. Detection range setup


The detection range of the sensor is shown in the drawing below. For different vehicle models and conditions, the detection area can be configured by handheld setup tool:

L1: Setup for the protruding object in the front of the vehicle, the distance from the sensor installation position to the front most part of the vehicle: default value=0m;

L2: Warning distance: default value=10m (setup range 1-50m, accuracy 0.1m);

W1: Right side detection width: default value=2m (setup range 1-5m, accuracy 0.1m);

W2: Left side detection width: default value=2m (setup range 1-5m, accuracy 0.1m).

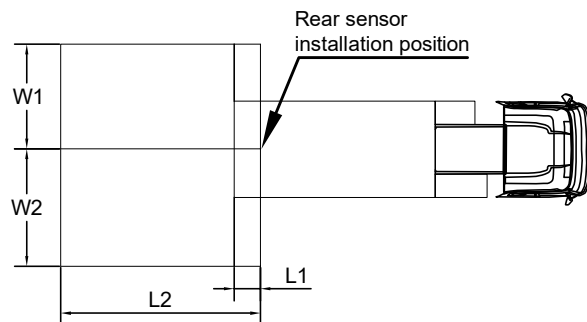

FCC WARNING

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This transmitter must not be co - located or operating in conjunction with any other antenna or transmitter.

This equipment should be installed and operated with minimum distance 20cm between the radiator& your body.