

Floor Troughs

INSTALLATION INSTRUCTIONS

CAUTION


INSPECT CONTENTS IMMEDIATELY AND FILE CLAIM WITH DELIVERING CARRIER FOR ANY DAMAGE.

SAVE YOUR BOX AND ALL PACKING MATERIALS.


YOU ARE RESPONSIBLE FOR DAMAGE TO YOUR UNIT IF RETURNED IMPROPERLY PACKED.



Plumbing Rough-ins

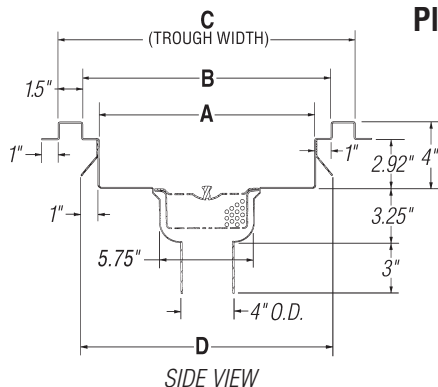

SIDE VIEW

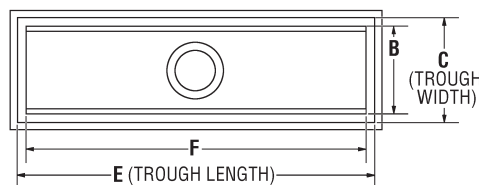

TOP VIEW


(see chart below for dimensions A through F)

12" (305mm)-WIDE TROUGHS	15" (381mm)-WIDE TROUGHS	18" (457mm)-WIDE TROUGHS	24" (610mm)-WIDE TROUGHS	TROUGH LENGTHS	dimension E	dimension F
dimension A: 7" (178mm)	dimension A: 10" (254mm)	dimension A: 13" (330mm)	dimension A: 19" (483mm)	dimension A: 18"	18"	15"
dimension B: 9" (229mm)	dimension B: 12" (305mm)	dimension B: 15" (381mm)	dimension B: 21" (533mm)	dimension B: 24"	24"	21"
dimension C: 12" (305mm)	dimension C: 15" (381mm)	dimension C: 18" (457mm)	dimension C: 24" (610mm)	dimension C: 30"	30"	27"
dimension D: 9.25" (232mm)	dimension D: 12.25" (311mm)	dimension D: 15.25" (387mm)	dimension D: 21.25" (540mm)	dimension D: 36"	36"	33"
model #	model #	model #	model #	dimension E	dimension E	dimension F
FT-1218-FG	n/a	n/a	n/a	in.	mm	in.
FT-1224-FG	FT-1524-FG	FT-1824-FG	FT-2424-FG	457	610	381
FT-1230-FG	FT-1530-FG	FT-1830-FG	FT-2430-FG	610	610	533
FT-1236-FG	FT-1536-FG	FT-1836-FG	FT-2436-FG	762	914	686
FT-1248-FG	FT-1548-FG	FT-1848-FG	FT-2448-FG	914	1219	838
FT-1260-FG	FT-1560-FG	FT-1860-FG	FT-2460-FG	1219	1524	1143
FT-1272-FG	FT-1572-FG	FT-1872-FG	FT-2472-FG	1524	1829	1448
FT-1284-FG	FT-1584-FG	FT-1884-FG	FT-2484-FG	1829	2134	1753
FT-1296-FG	FT-1596-FG	FT-1896-FG	FT-2496-FG	2134	2438	2057
FT-12120-FG	FT-15120-FG	FT-18120-FG	FT-24120-FG	2438	3048	2362
				3048	117"	2972

The above chart indicates troughs with fiberglass grating. For troughs with ADA-approved wide "T" Bar fiberglass grating, add suffix **-ADA**. Example: FT1224-FG-**ADA**
For troughs with stainless steel grating, replace suffix **-FG** with **-SG**. Example: FT1224-**SG**

- Size of rough-in hole for trough should be as follows:
Width = "Dimension D"
Length = "Dimension E"
Depth = 4 1/4"
- Size of rough-in hole for drain should be 5 7/8" diameter.
Depth, to accommodate plumbing, may vary.
- Place trough in hole.
- Lay finished floor so that it overlaps outer flange on all four sides of trough.
- Lay grating inside trough accordingly.

(End)

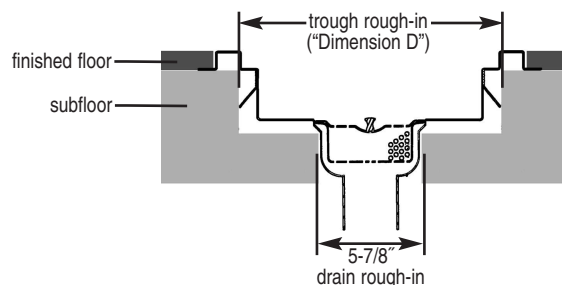

EG10094 Revised 01/15

Anti-Splash Floor Troughs

INSTALLATION INSTRUCTIONS

CAUTION


INSPECT CONTENTS IMMEDIATELY AND FILE CLAIM WITH DELIVERING CARRIER FOR ANY DAMAGE.

SAVE YOUR BOX AND ALL PACKING MATERIALS.


YOU ARE RESPONSIBLE FOR DAMAGE TO YOUR UNIT IF RETURNED IMPROPERLY PACKED.



Plumbing Rough-ins

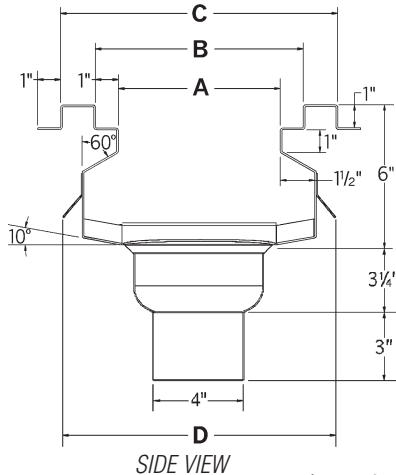

SIDE VIEW

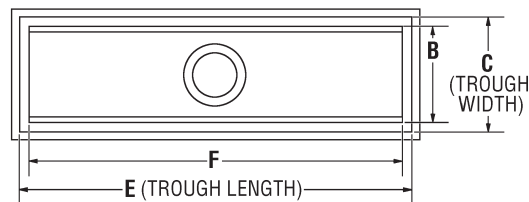

TOP VIEW


(see chart below for dimensions A through F)

12" (305mm)-WIDE TROUGHS	15" (381mm)-WIDE TROUGHS	18" (457mm)-WIDE TROUGHS	24" (610mm)-WIDE TROUGHS	TROUGH LENGTHS	
dimension A: 7" (178mm)	dimension A: 10" (254mm)	dimension A: 13" (330mm)	dimension A: 19" (483mm)	dimension E	dimension F
dimension B: 9" (229mm)	dimension B: 12" (305mm)	dimension B: 15" (381mm)	dimension B: 21" (533mm)	in.	in.
dimension C: 12" (305mm)	dimension C: 15" (381mm)	dimension C: 18" (457mm)	dimension C: 24" (610mm)	mm	mm
dimension D: 11.25" (286mm)	dimension D: 14.25" (362mm)	dimension D: 17.25" (438mm)	dimension D: 23.25" (591mm)		
model #	model #	model #	model #		
ASFT-1218-FG	n/a	n/a	n/a	18"	15"
ASFT-1224-FG	ASFT-1524-FG	ASFT-1824-FG	ASFT-2424-FG	457	381
ASFT-1230-FG	ASFT-1530-FG	ASFT-1830-FG	ASFT-2430-FG	24"	21"
ASFT-1236-FG	ASFT-1536-FG	ASFT-1836-FG	ASFT-2436-FG	610	533
ASFT-1248-FG	ASFT-1548-FG	ASFT-1848-FG	ASFT-2448-FG	30"	27"
ASFT-1260-FG	ASFT-1560-FG	ASFT-1860-FG	ASFT-2460-FG	762	686
ASFT-1272-FG	ASFT-1572-FG	ASFT-1872-FG	ASFT-2472-FG	36"	33"
ASFT-1284-FG	ASFT-1584-FG	ASFT-1884-FG	ASFT-2484-FG	914	838
ASFT-1296-FG	ASFT-1596-FG	ASFT-1896-FG	ASFT-2496-FG	48"	45"
ASFT-12120-FG	ASFT-15120-FG	ASFT-18120-FG	ASFT-24120-FG	1219	1143
				60"	57"
				1524	1448
				72"	69"
				1829	1753
				84"	81"
				2134	2057
				96"	93"
				2438	2362
				120"	117"
				3048	2972

The above chart indicates troughs with fiberglass grating. For troughs with ADA-approved wide "T" Bar fiberglass grating, add suffix **"-ADA"**. Example: ASFT1224-FG-ADA

For troughs with stainless steel grating, replace suffix **"-FG"** with **"-SG"**. Example: ASFT1224-SG

- Size of rough-in hole for trough should be as follows:
Width = "Dimension D"
Length = "Dimension E"
Depth = 6 1/4"
- Size of rough-in hole for drain should be 5 7/8" diameter.
Depth, to accommodate plumbing, may vary.
- Place trough in hole.
- Lay finished floor so that it overlaps outer flange on all four sides of trough.
- Lay grating inside trough accordingly.

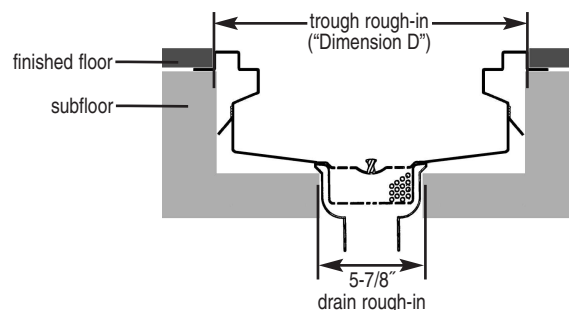

• 100 Industrial Boulevard, Clayton, Delaware 19938-8903 U.S.A. • www.eaglegrp.com
• Phone: 302/653-3000 • (Foodservice) 800/441-8440 • (MHC/Retail) 800/637-5100
• Fax: 302/653-2065

Eagle Foodservice Equipment, Eagle MHC, SpecFAB®, and Retail Display are divisions of Eagle Group. ©2015 by the Eagle Group