California Prop 65 Warning

WARNING:

This product can expose you to chemicals, which is known to the state of California to cause cancer birth defects and other reproductive harm. Do not ingest.

For more info go to: www.PyleWarnings.ca.gov

PYLE®

PLG5C
PLG6C

INSTALLATION MANUAL

www.PyleUSA.com

INTRODUCTION

CONGRATULATIONS!

YOU HAVE PURCHASED ONE OF THE FINEST CAR AUDIO PRODUCTS AVAILABLE TODAY.

PYLE PLG-SERIES SPEAKER IS A STATE OF THE ART PRODUCT CAREFULLY DESIGNED & MANUFACTURED FOR VEHICLE USE,AND HAS BEEN THOROUGHLY TESTED TO ENSURE CONSISTENT AND RELIABLE PERFORMANCE.

MOUNTING INSTRUCTIONS

MIDWOOFERS



1.Using mounting template for speaker,mack the correct mounting loction by a pencil or pen.

2.Cut out the panel by this marking and drill 4 holes for the mounting bolts to pass through.

3.Separate the punching metal from the grill frame.

4.Connect the terminal of speaker to car audio correctly by using cord provided.
Caution:Be carefful not to misconnect polarity.

5.Insert grill frame & speaker Unit in the speaker mounting hole at the rear panel and fix speaker with bolts & screw & nuts provided.

6.Put the parching metal back with the grill frame.

TWEETERS

• SURFACE MOUNT

1.Assemble each parts as above method. Put the tweeter unit into bracket and rotate clock-wise unit the bracket.
2.Before screwing up the bracket, investigate the layout of your automobile thoroughly.This it to check whether there is enough space for screw in behind and to check whether there is no electrical wiring in behind. Take care when working near to the petrol line or hydraulic lines and electrical wiring.

• FLUSH MOUNT

1.Assemble each parts as above method. Put the tweeter unit into bracket and rotate clock-wise unit the tweeter unit is locked to the bracket.
2.Make 45mm diameter hole where you want to install.Before cutting hole,investigate the layout of check whether there is no electrical wiring in behind.Take care when working near to the petrol line or hydraulic lines and electrical wiring.
3.Push the assembled tweeter into the hole after connecting each wires.

WIRING INSTRUCTIONS

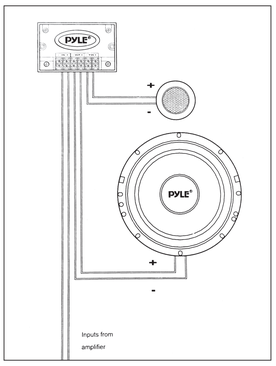

SPECIFICATIONS

TWEETER

Frequency Response:	1.3K~22k Hz
Power Handling:	100 Watts
Nominal Impedance:	4 Ohms
SPL:	92 dB

PLG5C MIDWOOFER

Frequency Response:	60~6k Hz
Power Handling:	300 Watts
Nominal Impedance:	4 Ohms
SPL:	89 dB

PLG6C MIDWOOFER

Frequency Response:	50~5k Hz
Power Handling:	400 Watts
Nominal Impedance:	4 Ohms
SPL:	91 dB

TEMPLATE

PLG5C MIDWOOFER(115mm)/PLG6C MIDWOOFER(142mm)



PLG5C/PLG6C/147*217mm/80g双铜/8页