


The product name is **Bluetooth voice remote control** model name is **RC-48**

Product description:

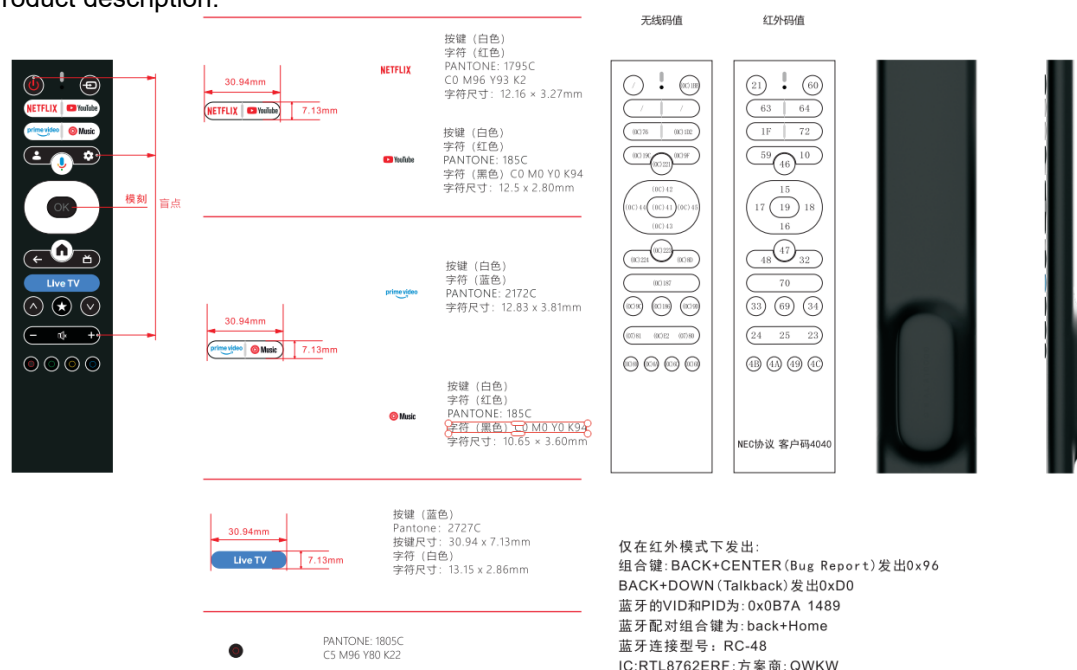

instructions

1. Bluetooth remote control pairing instructions

device name: RC-48

Press and hold the [BACK] key and [HOME] key on the remote control at the same time for about 3 seconds to work the indicator flashing, indicating that you have entered pairing mode. Turn on Host Bluetooth - click host Bluetooth - Search for devices - Connect to the "RC-48" device name and connect. If pairing is successful, the red light of the remote control stays on for 3 seconds; if pairing fails after 30 seconds, the red dot goes out Equipment.

2. Low power alarm

When the battery power is lower than 2.2V, Every time the user presses a key, Press any key, the red light flflashes for 3s, and the frequency is 1Hz

3. Back connection

When there is pairing information, press any key to send the corresponding infrared code and send the backlink broadcast for 5s(the POWER key and the combination key do not send the backlink broadcast). The reconnection was successful and the indicator light went out.

The remote control and the projector should remain connected at 4m for at least 2 hours without any disconnection. The remote control and the projector should remain connected for at least 1 hour at a distance of 6 meters without any disconnection.

4. sleep and wake up

Bluetooth sleep mode: The Bluetooth sleep time is ≥ 1 hour.

When Bluetooth is in sleep mode, the function is normal: When operating the remote control in Bluetooth sleep mode, the first key press can normally respond to the infrared function, and the second key press can normally respond to the Bluetooth function.

5. OTA

When the TV is turned on, the upgrade file of the remote controller is detected. If the upgrade file exists, the remote controller performs OTA upgrade, and the LED lamp flashes. At this time, the remote controller can't be used, and any buttons don't respond. After the upgrade is successful, the LED light stops flashing, and the remote controller can be used normally at this time. If the upgrade fails, it will be detected and upgraded again at the next boot. After OTA fails, the LED light stops flashing, and the remote controller returns to the old version for normal operation.

6. Blue tooth remote control PID/VID

vendor: 0x0B7A. product: 0x1489

FCC Warning:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 0cm between the radiator and your body.