
INSULATED JACKETS	H	W	DEPTH
MODEL	**A**	**B**	**C**
BLZ-3-IJ	9 5/8	25 9/16	22 1/4
BLZ-4-IJ	9 5/8	33	22 1/4
BLZ-5-IJ	9 5/8	40 3/4	22 1/4
BLZ-3PRO-IJ	11	34 7/8	24 1/2
BLZ-4PRO-IJ	11	44 5/8	24 1/2
BLZ-SB2-IJ	9 5/8	13	22 1/4
BLZ-PB-IJ	9	16 1/2	20 5/8
BLZ-PROPB-IJ	10 1/4	16 1/2	20 5/8
BLZ-GRIDDLE-IJ	12 3/4	30 5/8	25

REFRIGERATOR AND TRIM KITS	H	W	DEPTH
MODEL	**A**	**B**	**C**
BLZ-SSRF130	33 3/4	21 9/16	23
BLZ-SSRF-40DH	33 3/4	21 9/16	23 1/2
BLZ-SSRF-50DH	34 1/2	24 1/2	24 1/2
BLZ-TRIMKIT-4.1/4.5	33 3/4	21 9/16	
BLZ-TRIMKIT-5.2	34 1/2	24 1/2	
BLZ-ICEMKR-50GR	34	16 5/8	27 5/8
BLZ-TRIMKIT-ICEMKR	34	16 5/8	
BLZ-SSRF-DBDR5.1	34 1/4	24 1/2	26
BLZ-TRIMKIT-DR5.1	34 1/4	24 1/2	

COUNTER TOP NOTCH DETAIL

Measurements of the notch dimension depends on the counter top material installed.

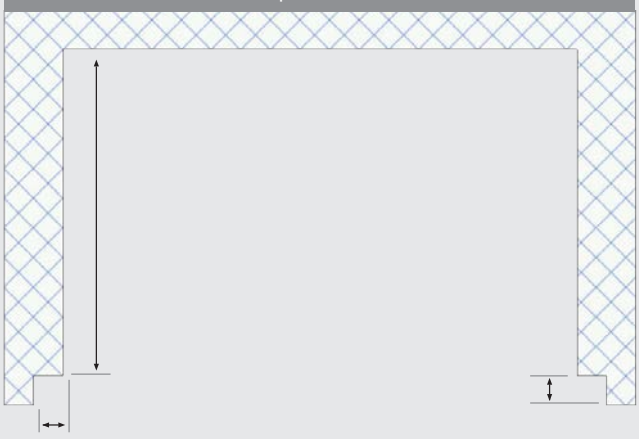

- Your application will have additional requirements, consult owner's manual for full instructions.
- Ensure your island cavity is adequately vented. Number of vents shown in diagram is for informational purposes only. Consult your local licensed professional for adequate requirements.
- Ensure your outdoor kitchen is constructed out of non-combustible materials.
- If your outdoor kitchen is constructed of combustible materials, an insulated jacket is REQUIRED.
- Cutout dimensions do not allow for lid clearance or other measurement requirements. Consult the Owner's Manual for specifics.