


PS-300 Pillow Speaker

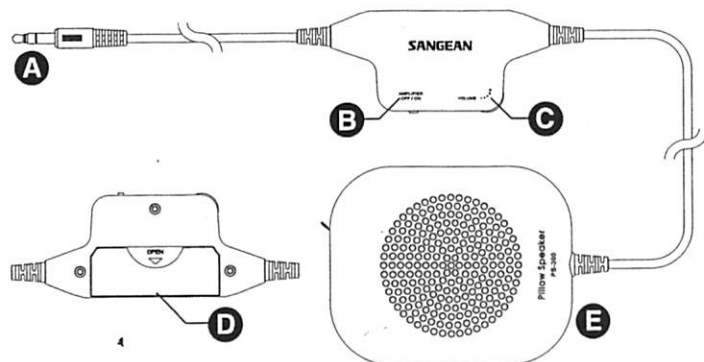

- A. 3.5mm Input connector B. Amplifier on / off C. Volume control
D. Battery compartment E. Pillow speaker

Volume : Adjust To Desired Audio Output Level

Amplifier On / Off : Switch On To Increase Audio Output Level

Note : Install One AAA / UM-4 / R3 Battery (Battery not included) To Power the Optional Internal Audio Amplifier Only Connect To Headphone Jack, As Connection To Higher Output Speaker Connection Will Cause Damage.

- Speaker : 57mm 16 ohm 50mW full range
- Amplifier output power: Typical 50mW 16 ohm
- Input impedance: 200 ohm
- Frequency response : 100Hz ~20kHz
- Maximum input power: 50mW (amplifier OFF)
- Input sensitivity: 500mVrms
- Length of the cable (mm / inch): 1200 / 47.24

