


Centralite Temperature & Humidity Sensor

CLZ-3374-C



Version: 20200413

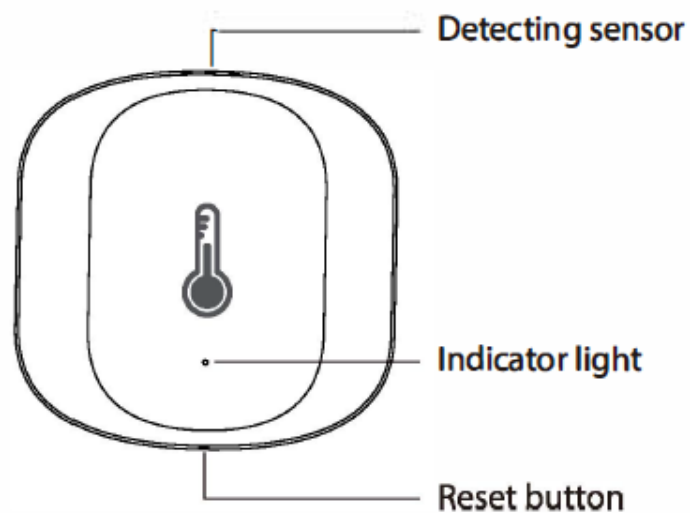

Specification

Battery: CR2032 x 1 (included)

Temperature accuracy: $\pm 0.3^{\circ}\text{C}$

Humidity accuracy: $\pm 3\%$

Wireless connection: Zigbee 3.0

Connection distance: indoor 10-30m

Frequency: 2.4-2.483GHz

Working temperature: -20°C - 50°C

Working humidity: 0-95%RH, no condensation

Introduction

The smart temperature and humidity sensor detects temperature and humidity in real time, also shows temperature and humidity records.

Requirement to use

1. MIOS app
2. MIOS zigbee gateway (not included)

Installation

1. Make sure the temperature and humidity sensor is in the range of Zigbee gateway's signal. Effective range testing: short press the reset button of temperature and humidity sensor after connected to gateway. If the indicator light is flashing, it means that the temperature and humidity sensor communicate effectively with the Zigbee gateway.
2. Pull the insulation sheet from battery compartment of the temperature and humidity sensor.
3. Attach the temperature and humidity sensor to wall with provided double-sided mounting tape.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.
- This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.