
PURPLE LEAF

est. 2013

Dimmable Strip Lights for 12' × 24' PERGOLA

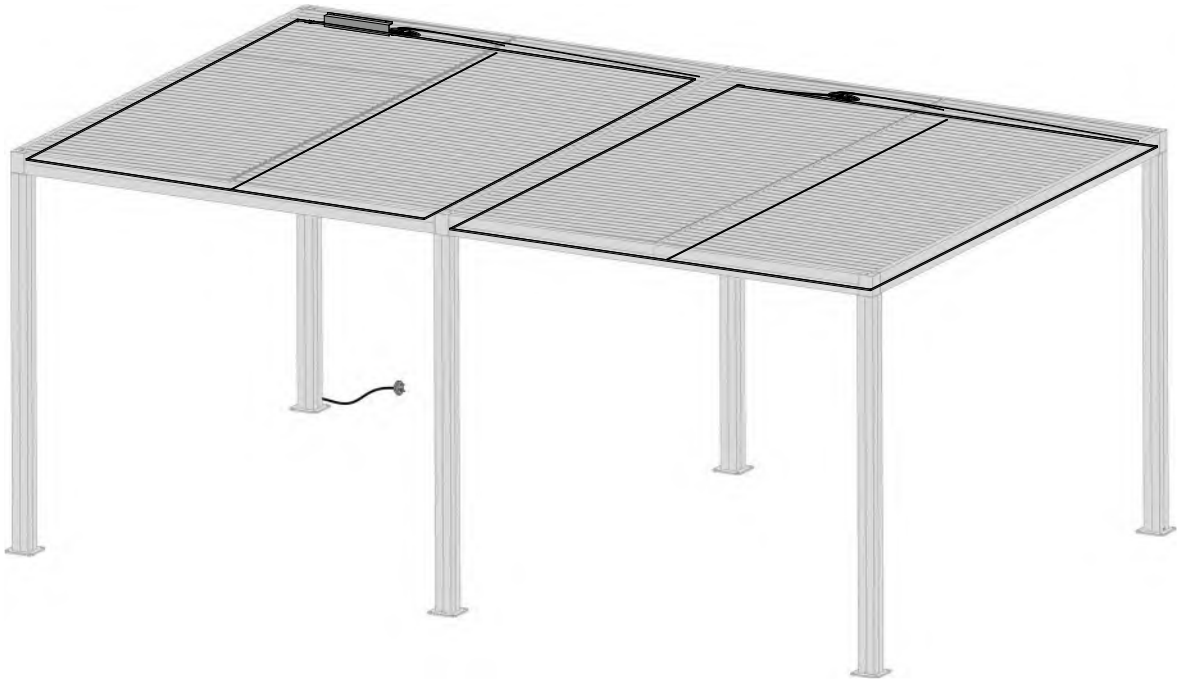


Assembly Manual


©Copyright 2013-2027 Purple Leaf Inc. All Rights Reserved

CHECK LIST


aa X1




hh-2 X1




bb X2
(3.45X2.7m)




ii-1 X2




cc X6
(3.45X1.5m)




jj X1




dd X2
(3.45X5m)




kk-1 X1



ff X3



ll X4
(M4×10mm)



mm1 X10
(1707mm)




nn X1



mm2 X10
(1781mm)




aa ×1

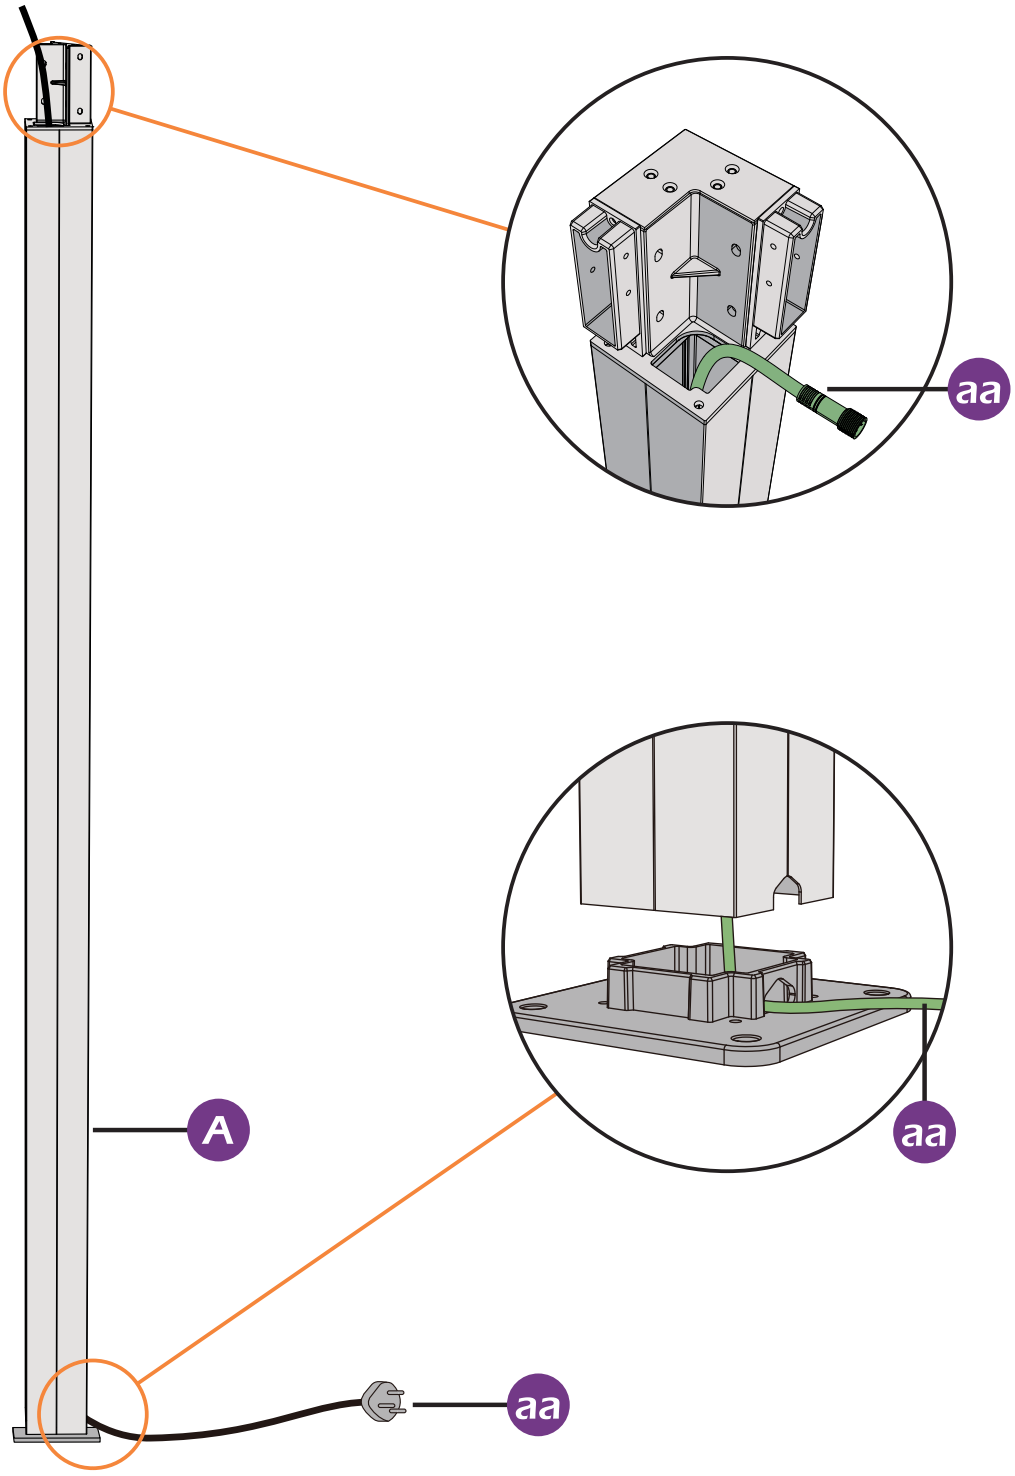


STEP 1

aa ×1




With the pergola already assembled:

1. Lower a rope of sufficient length from the top of the column all the way through, keeping one end accessible at the top.
2. Retrieve the other end through the drainage hole.
3. Attach it to Part aa.
4. Pull from the top to draw Part aa up through the column.

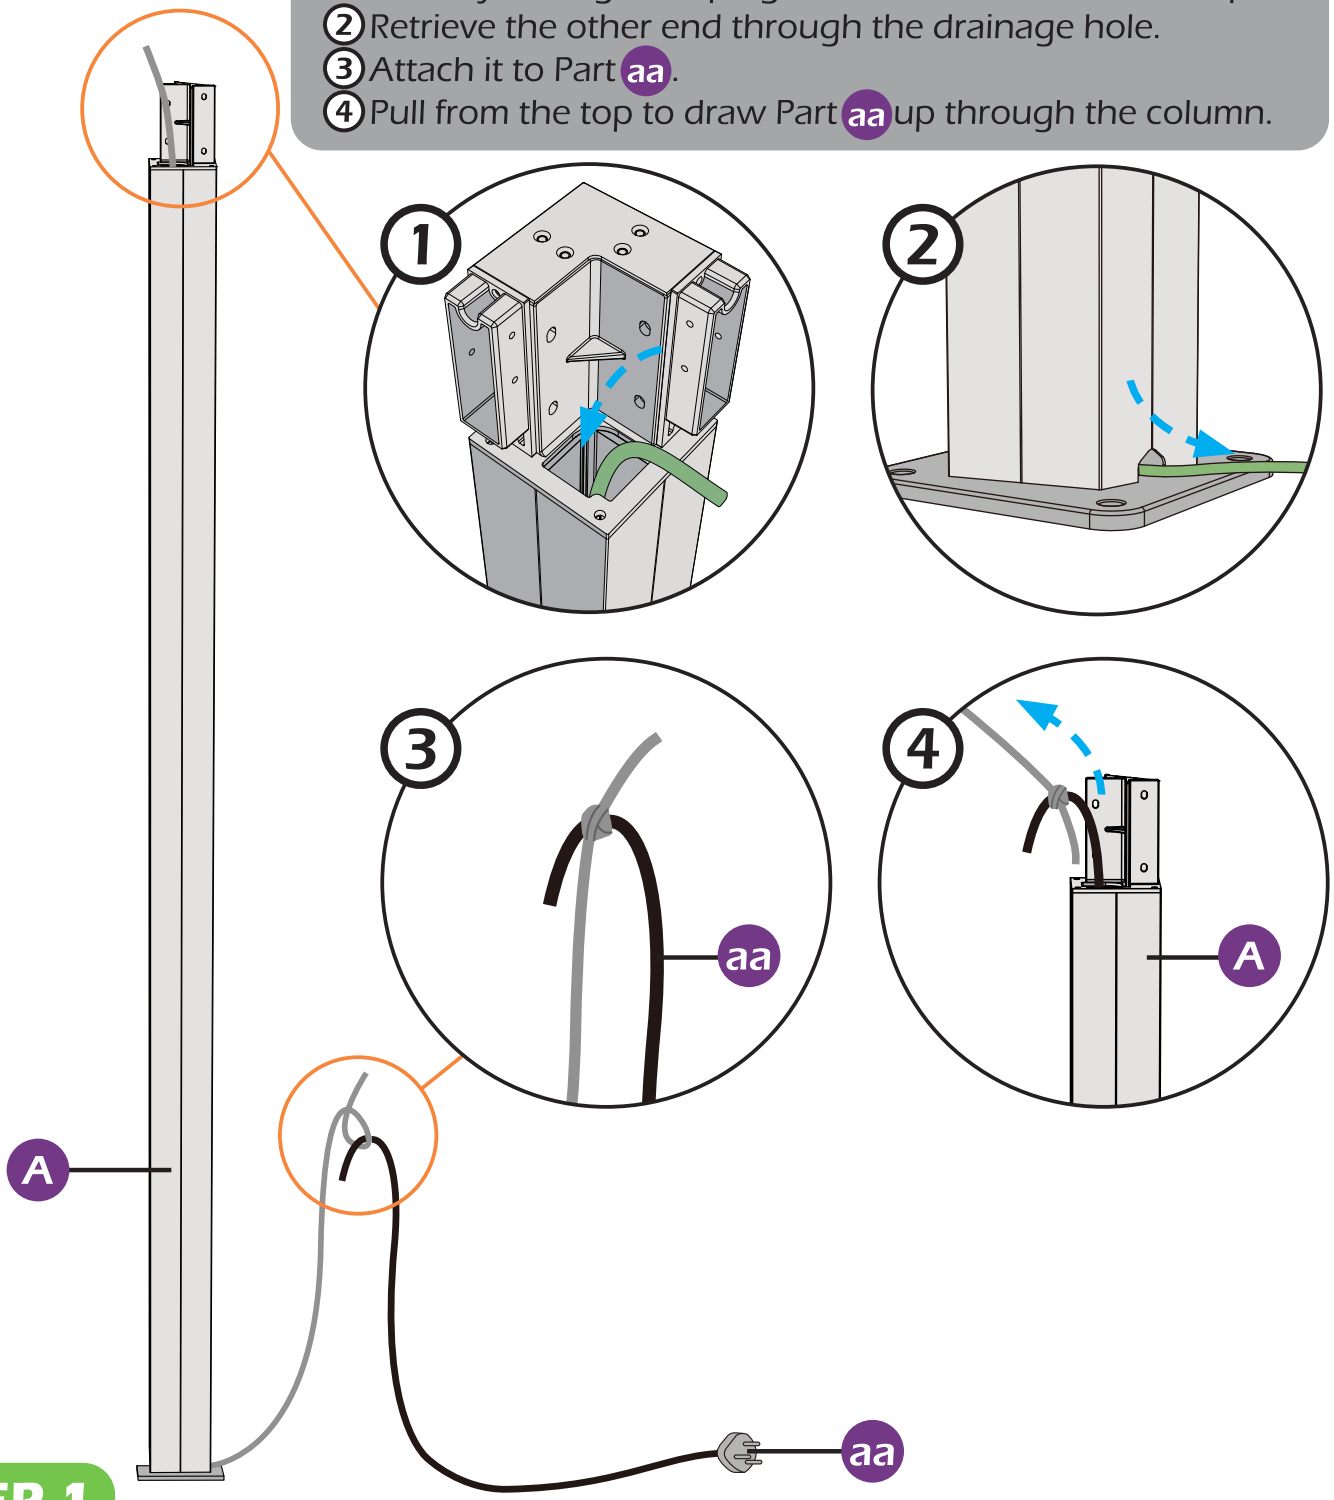


STEP 1

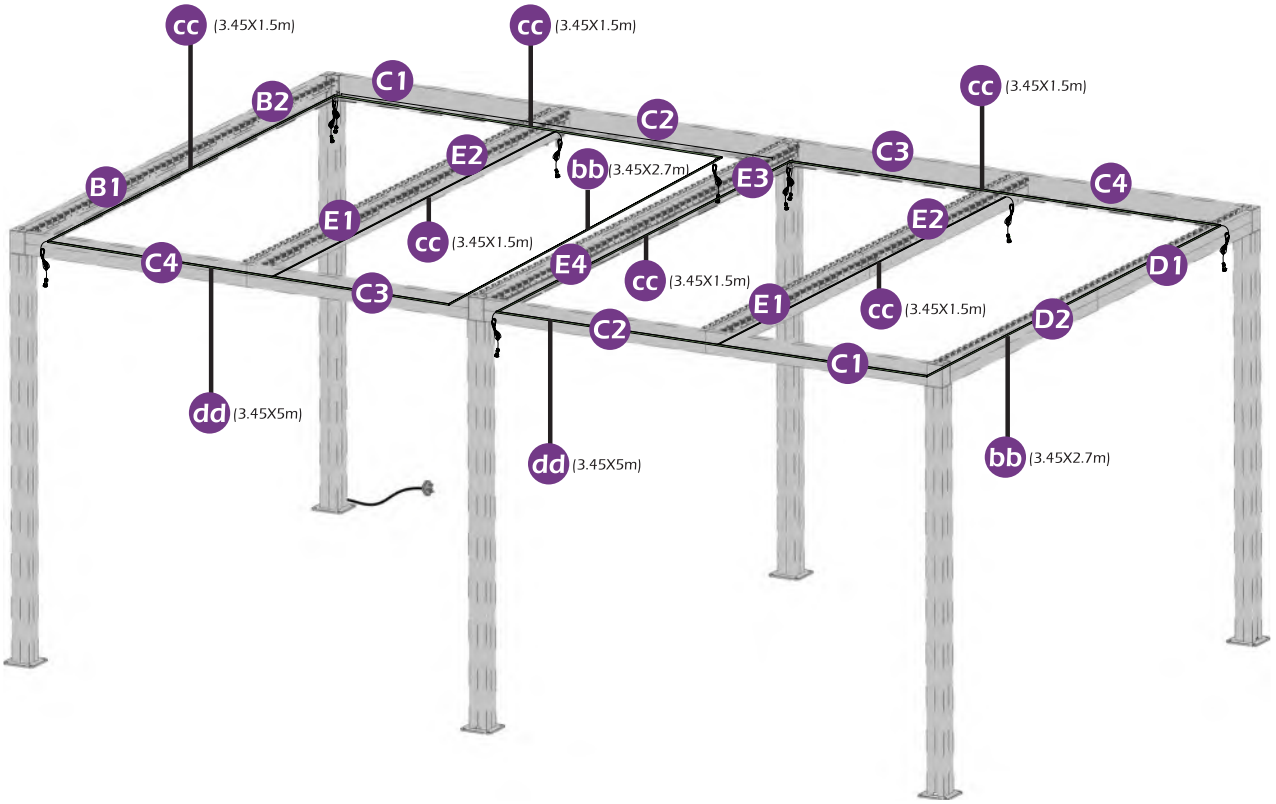

cc (3.45X1.5m)
cc (3.45X1.5m)
cc (3.45X1.5m)
B2
C1
C2
C3
C4
B1
E2
bb (3.45X2.7m)
E3
E1
cc (3.45X1.5m)
E2
C4
E4
cc (3.45X1.5m)
D1
C3
E1
cc (3.45X1.5m)
D2
C2
C1
dd (3.45X5m)
dd (3.45X5m)
bb (3.45X2.7m)


STEP 2


ff ×3





First paste the double-sided adhesive tape in the lamp tank.




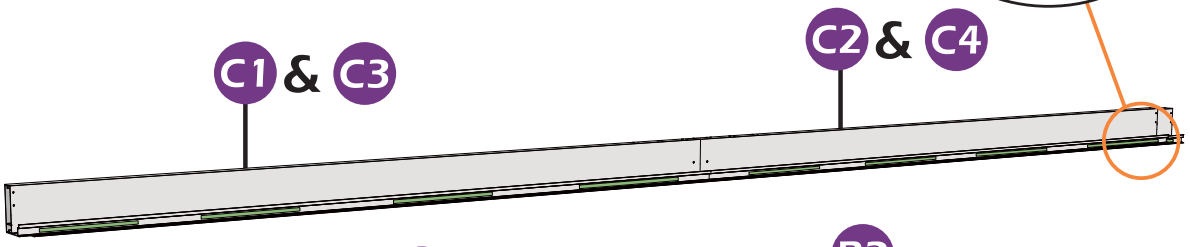


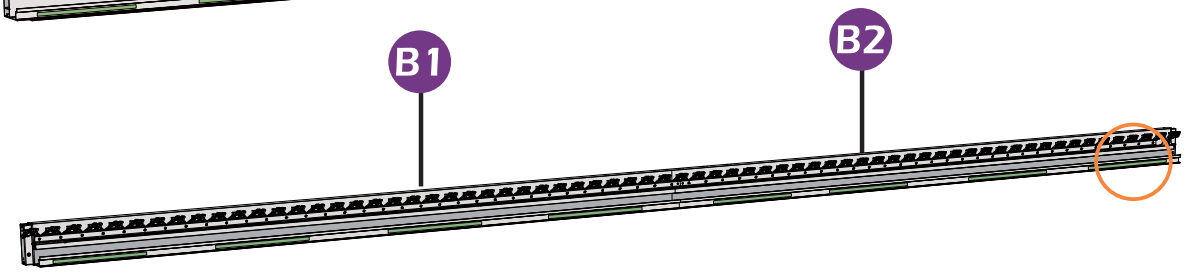

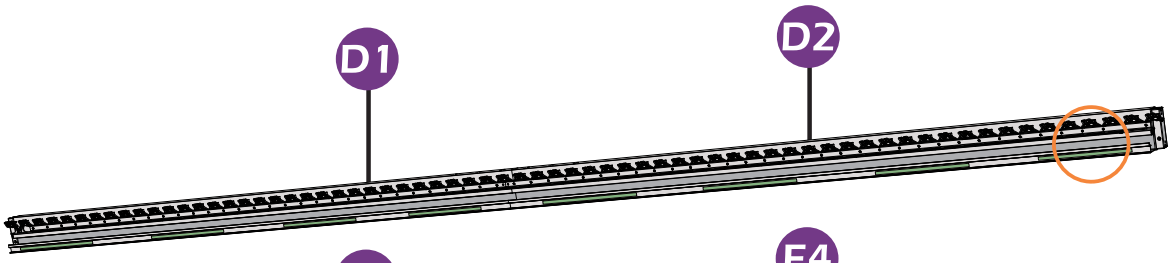


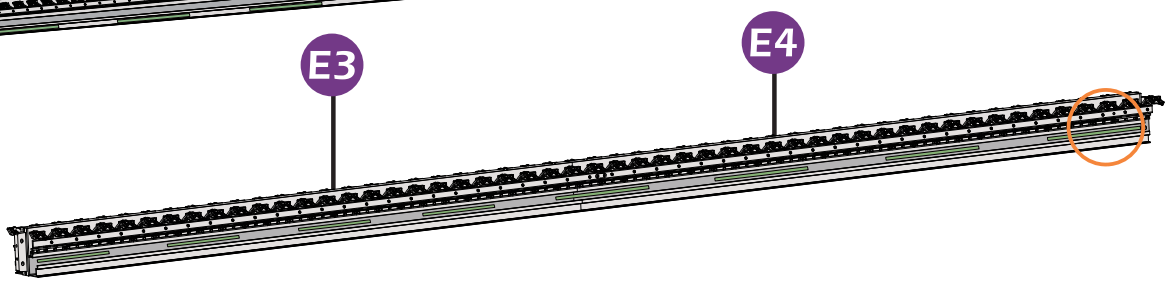

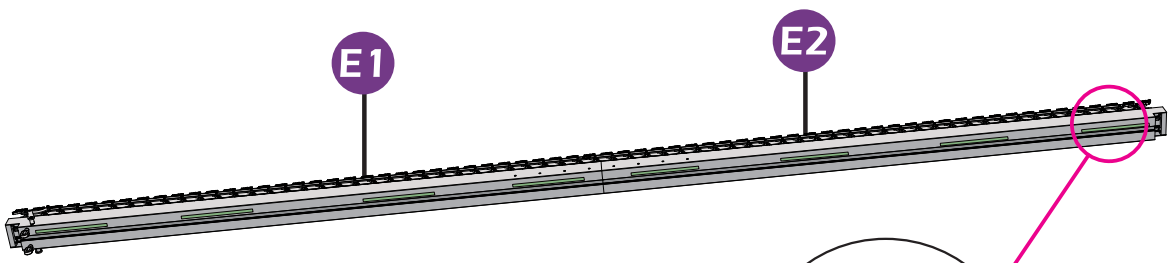






STEP 2

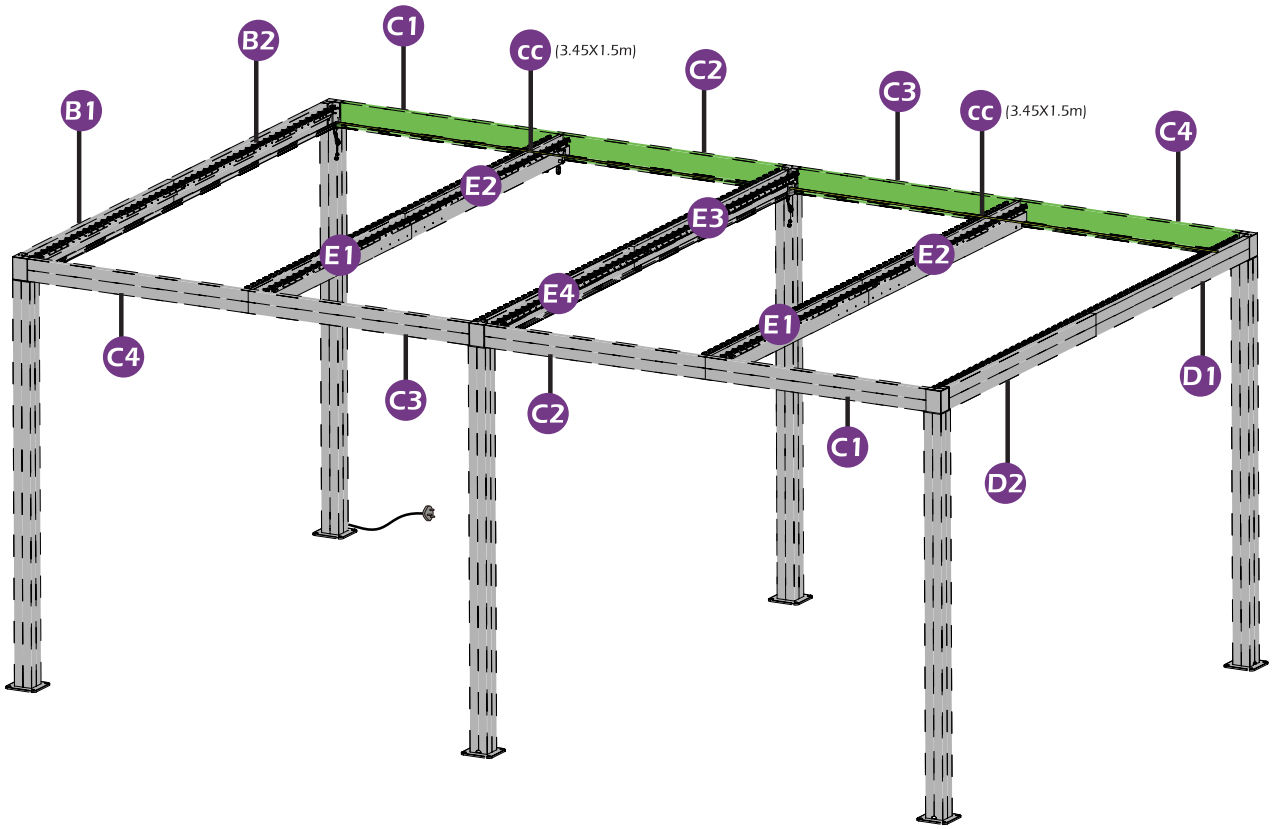
B2
C1
CC (3.45X1.5m)
C2
C3
CC (3.45X1.5m)
C4
B1
E2
E3
E1
E2
E4
E1
C4
C3
C2
C1
D1
D2


STEP 2

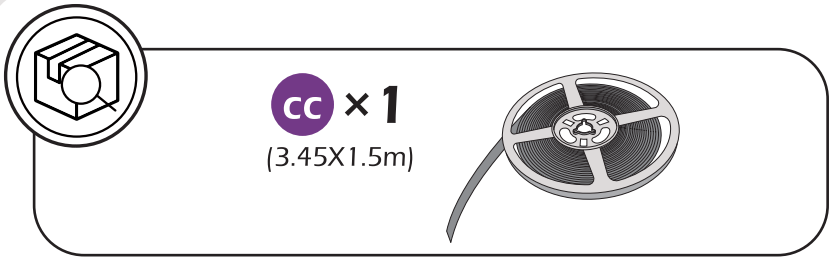

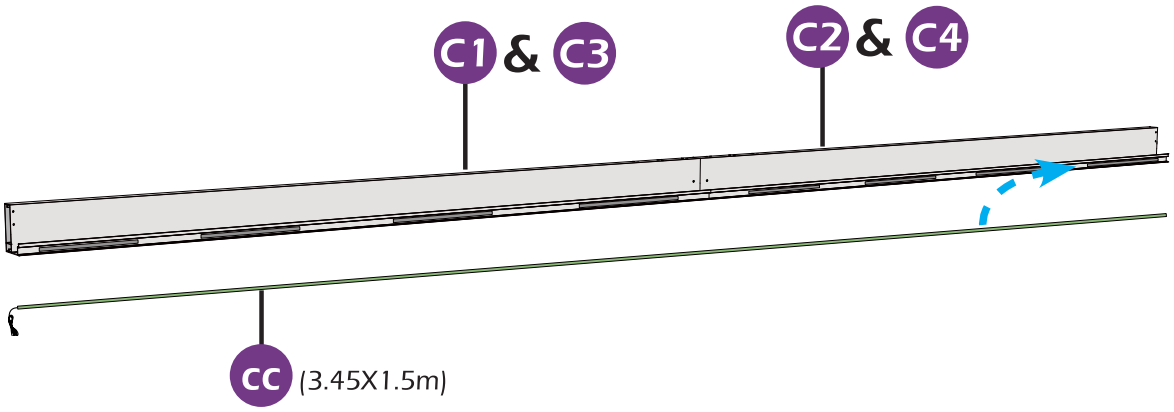

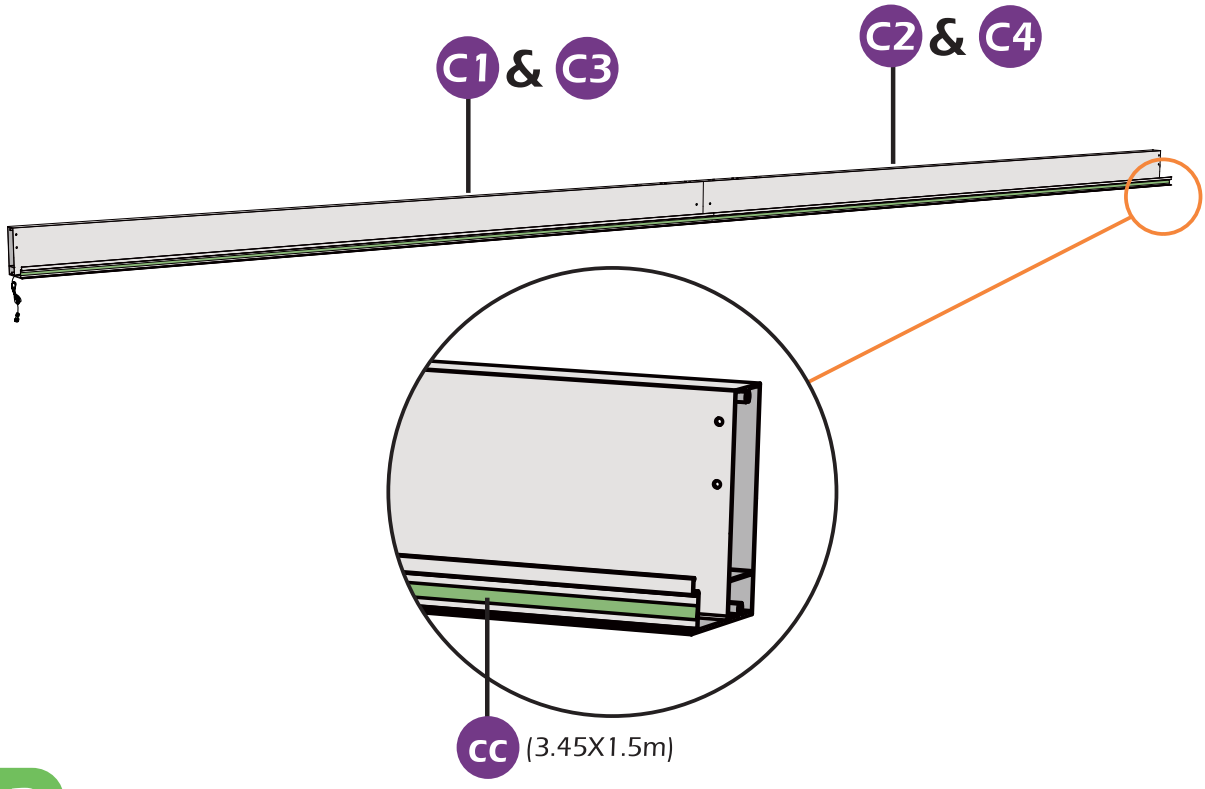



STEP 2

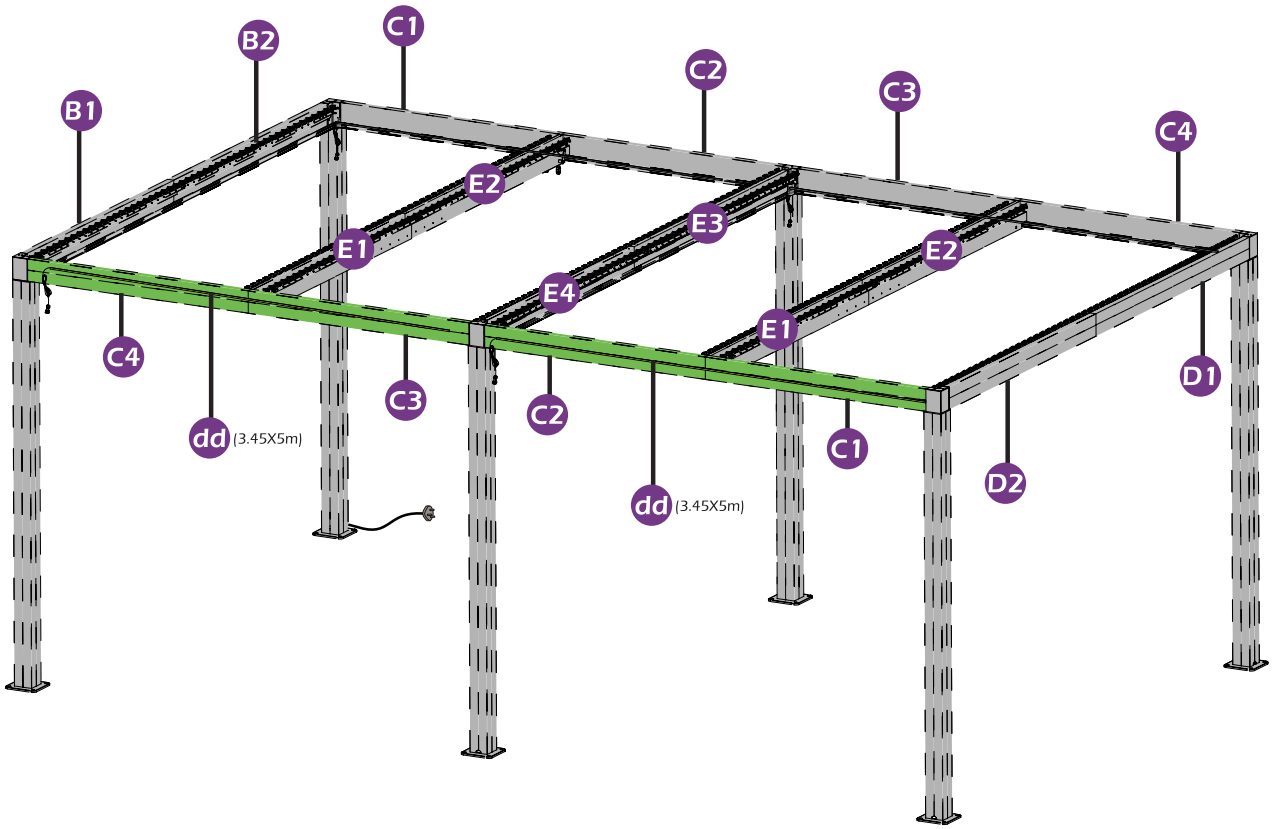

B1
B2
C1
C2
C3
C4
E1
E2
E3
E4
C4
dd (3.45X5m)
C3
C2
dd (3.45X5m)
E1
E2
C1
D2
D1

STEP 2


dd × 1
(3.45X5m)



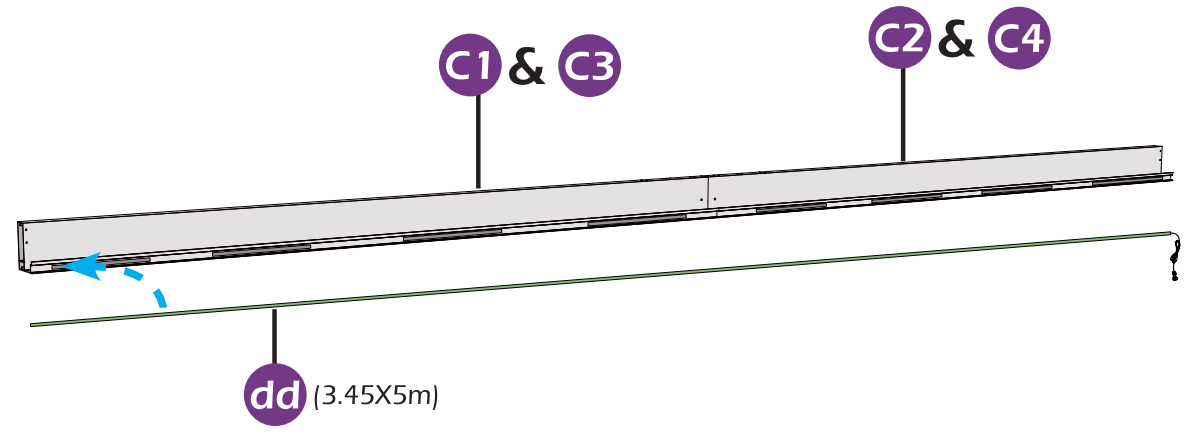

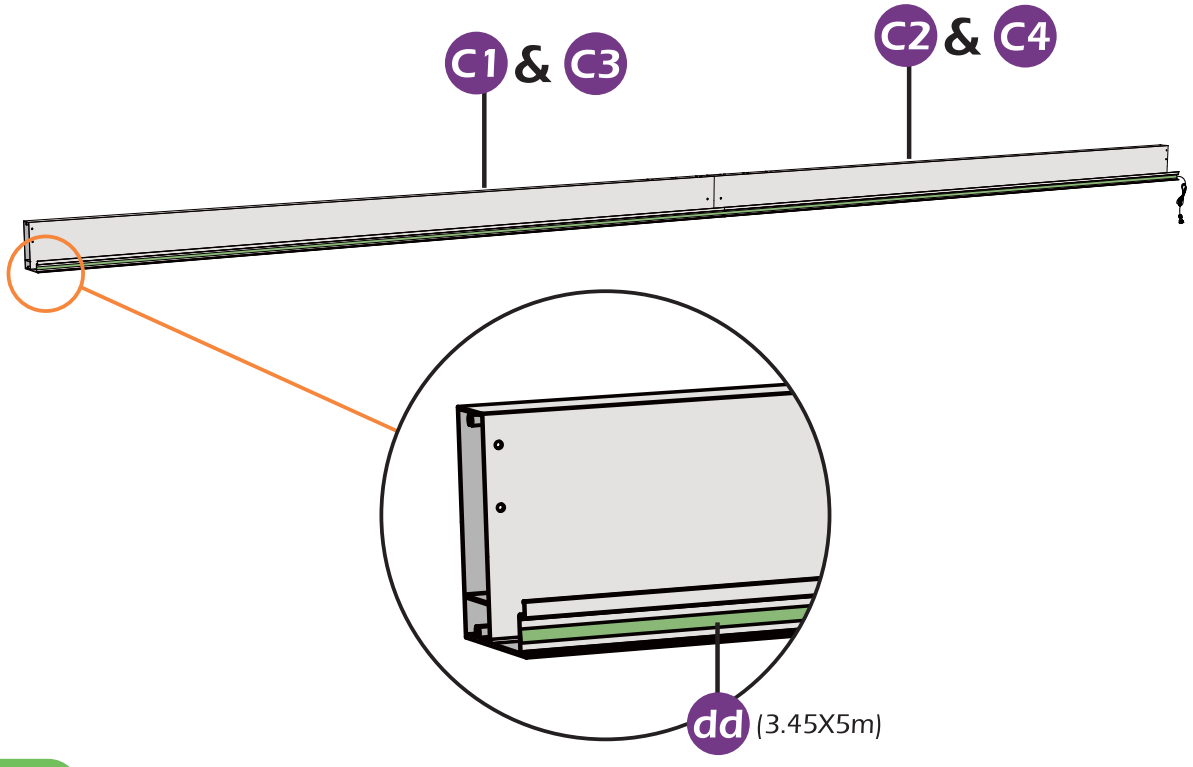



STEP 2

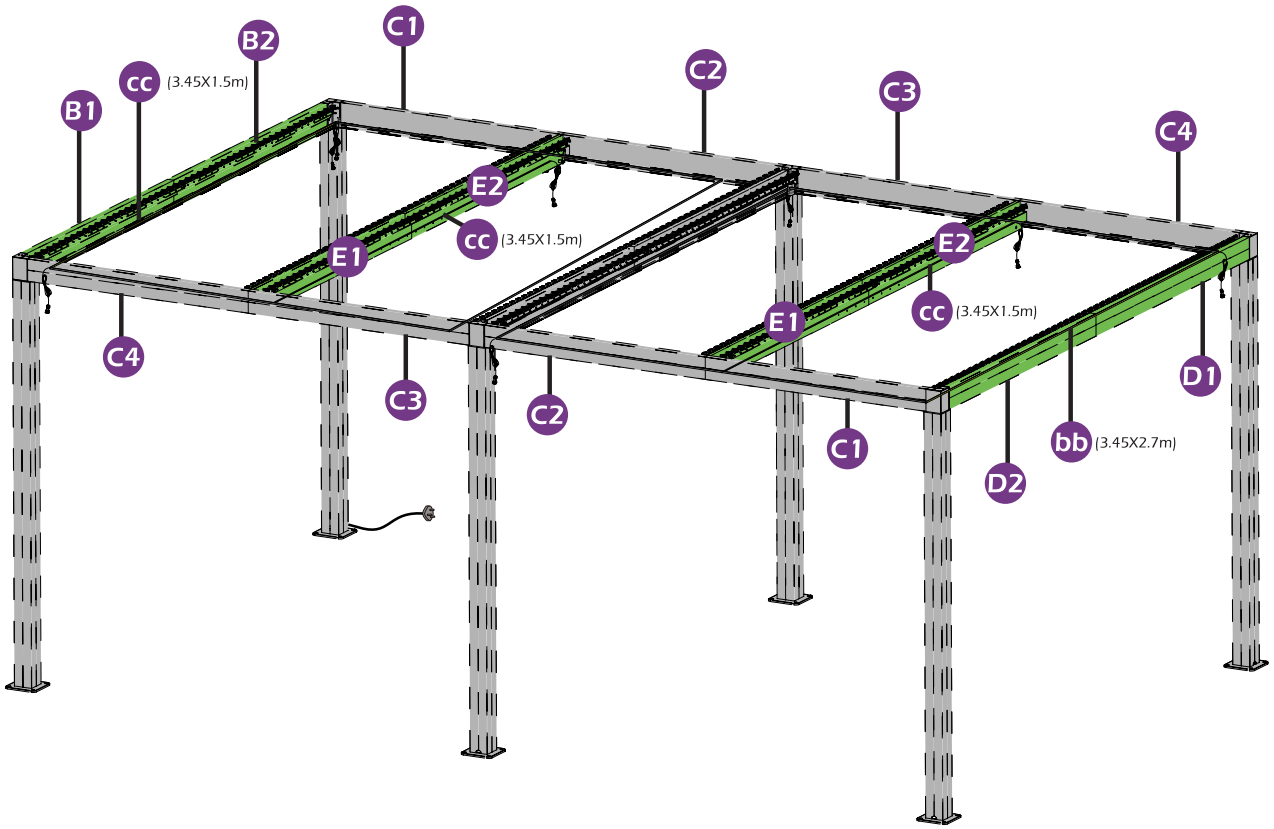

B1
cc (3.45X1.5m)
B2
C1
C2
C3
C4
E2
cc (3.45X1.5m)
E1
E2
cc (3.45X1.5m)
E1
C4
C3
C2
C1
D1
bb (3.45X2.7m)
D2

STEP 2

CC ×1
(3.45X1.5m)

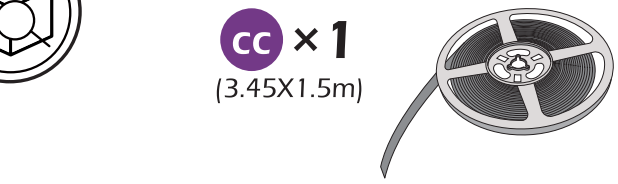


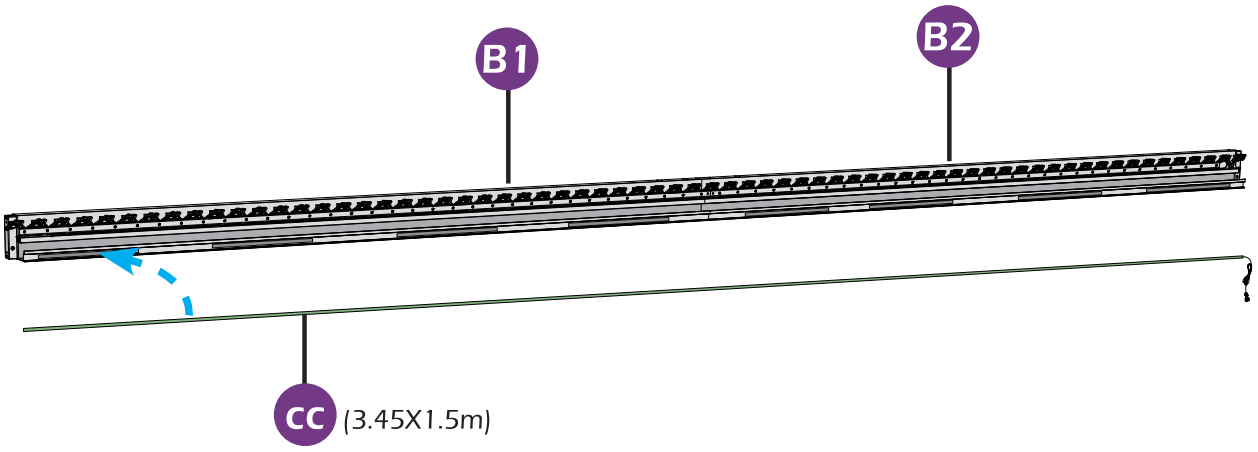


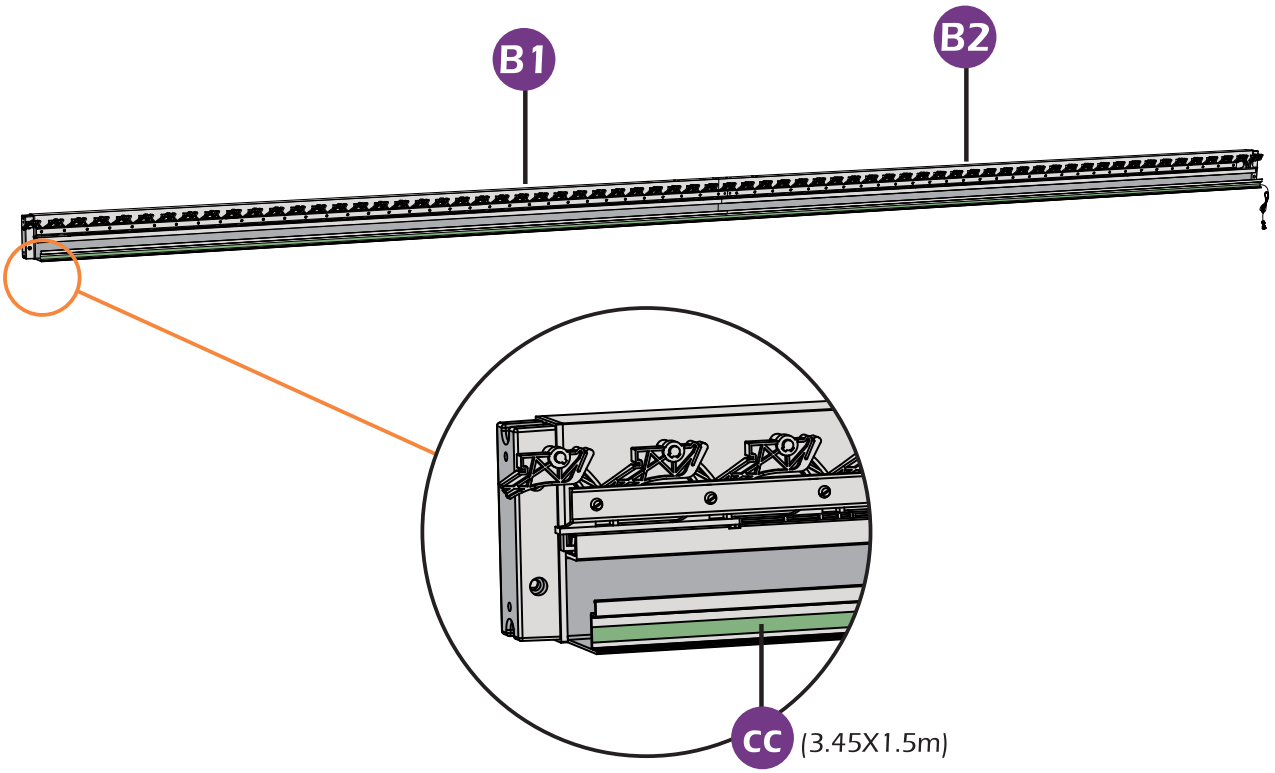

STEP 2

bb ×1
(3.45X2.7m)

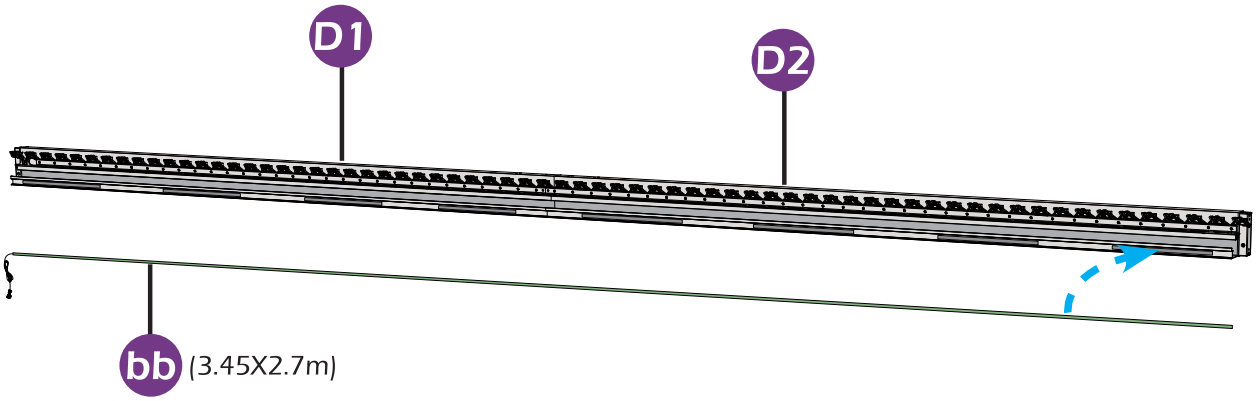

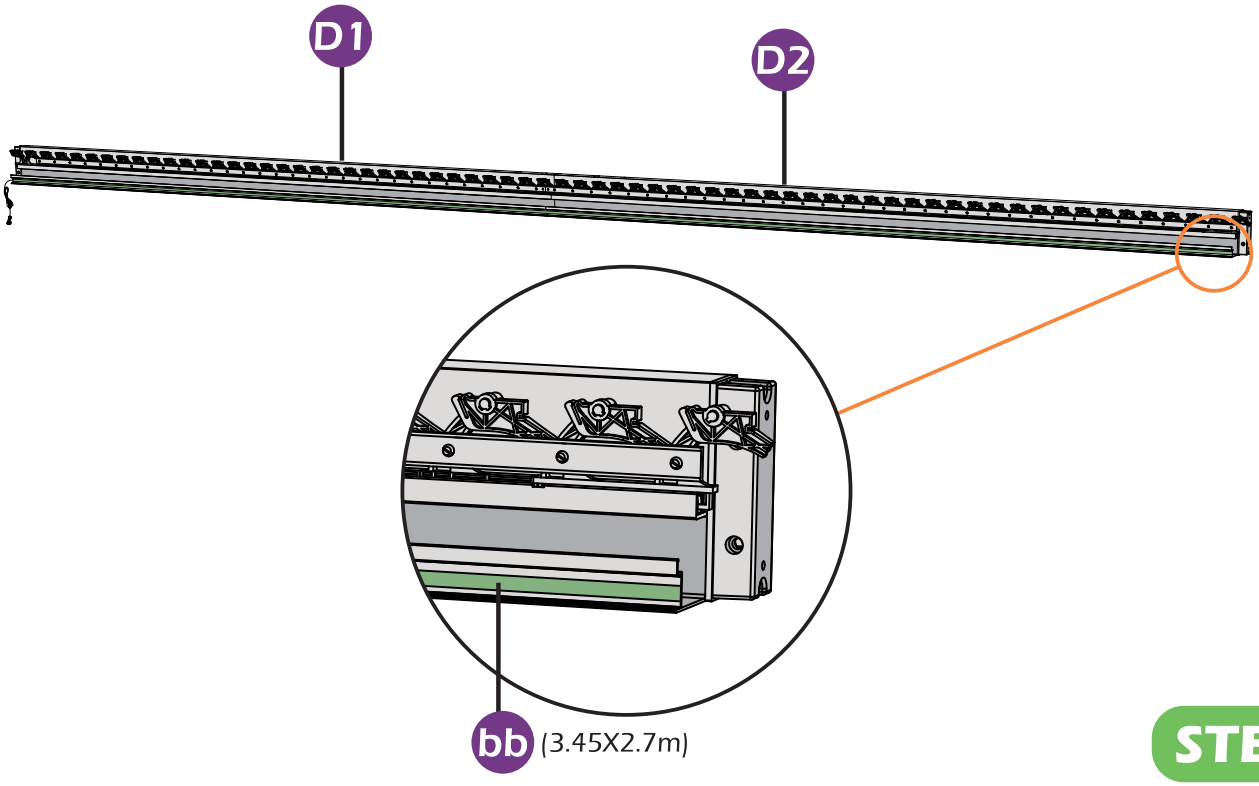



STEP 2




CC ×2


(3.45X1.5m)



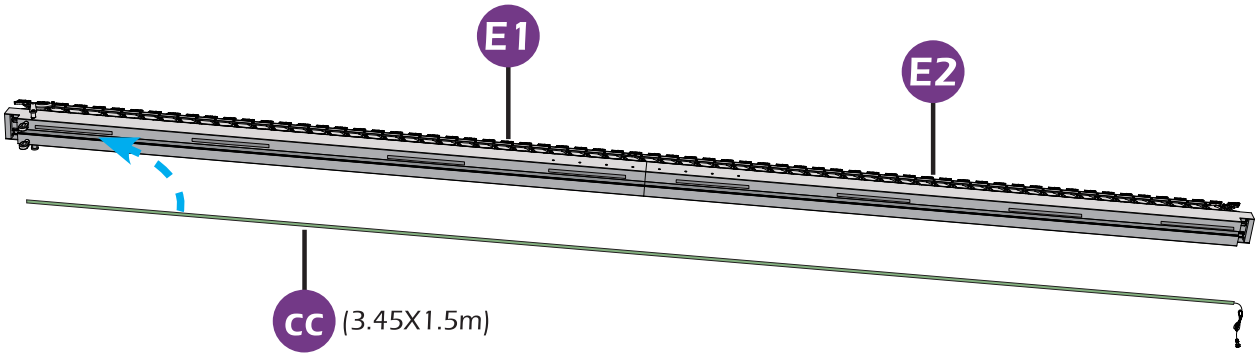

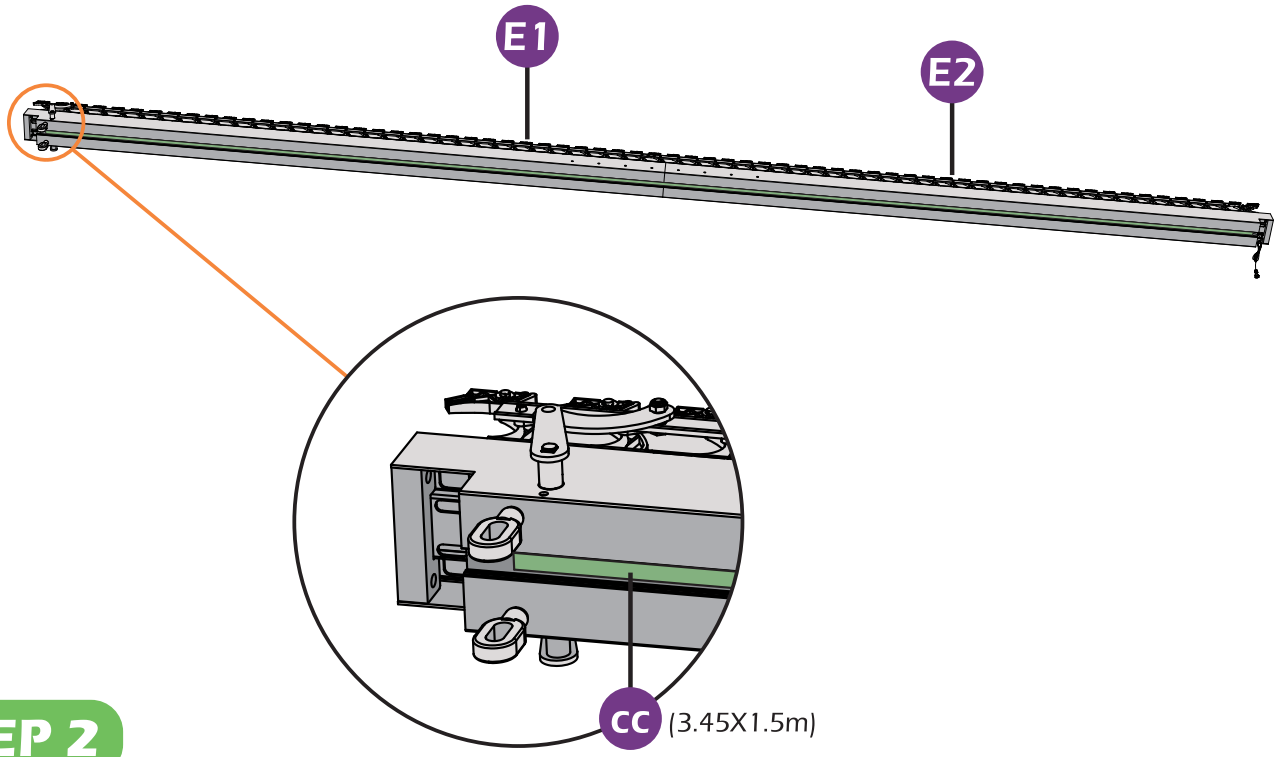


STEP 2

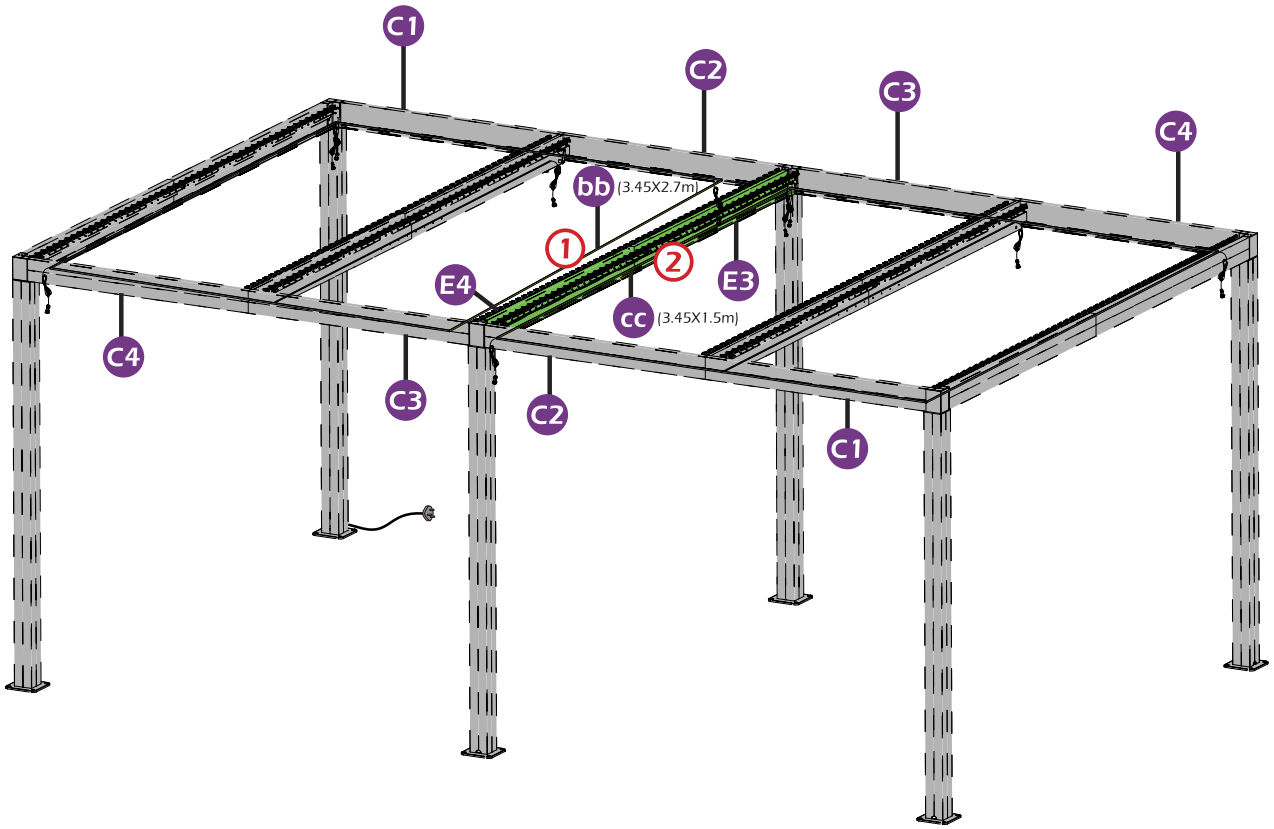



STEP 2

bb ×1
(3.45X2.7m)




Side 1 for Beam E3 & E4.

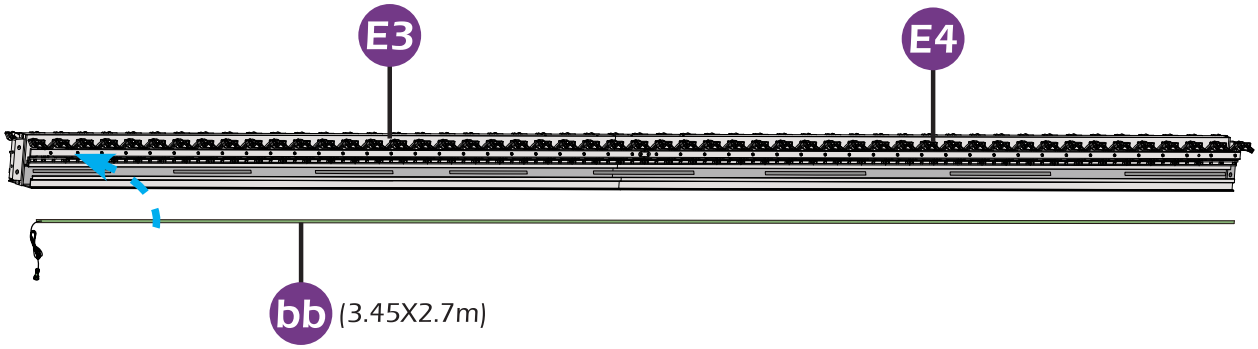

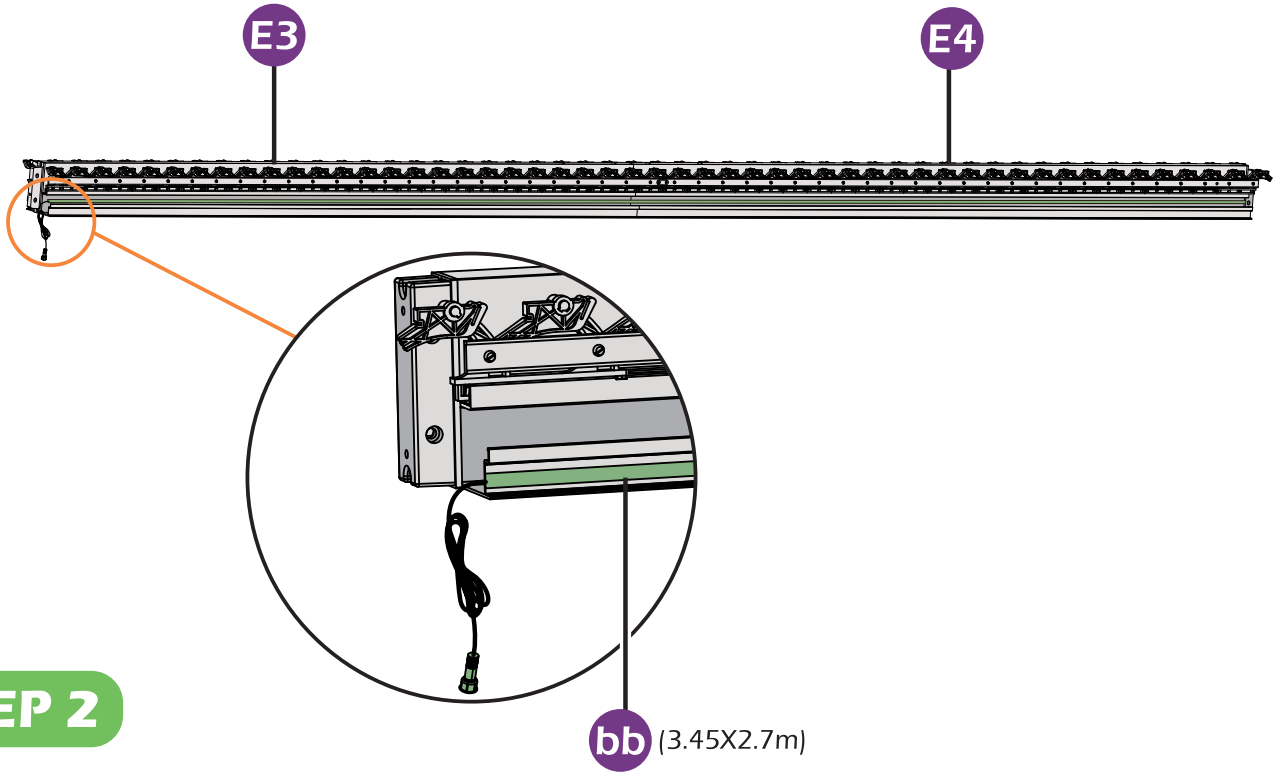



STEP 2

CC ×1
(3.45X1.5m)




Side 2 for Beam E3 & E4.

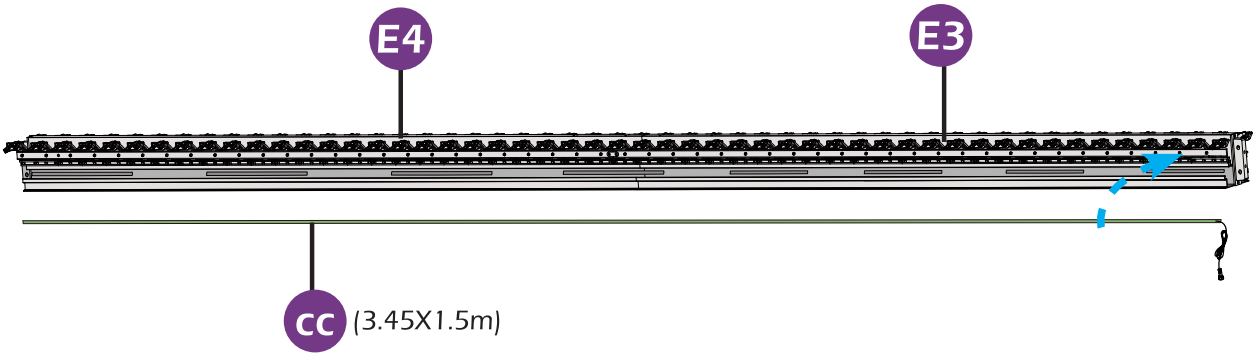


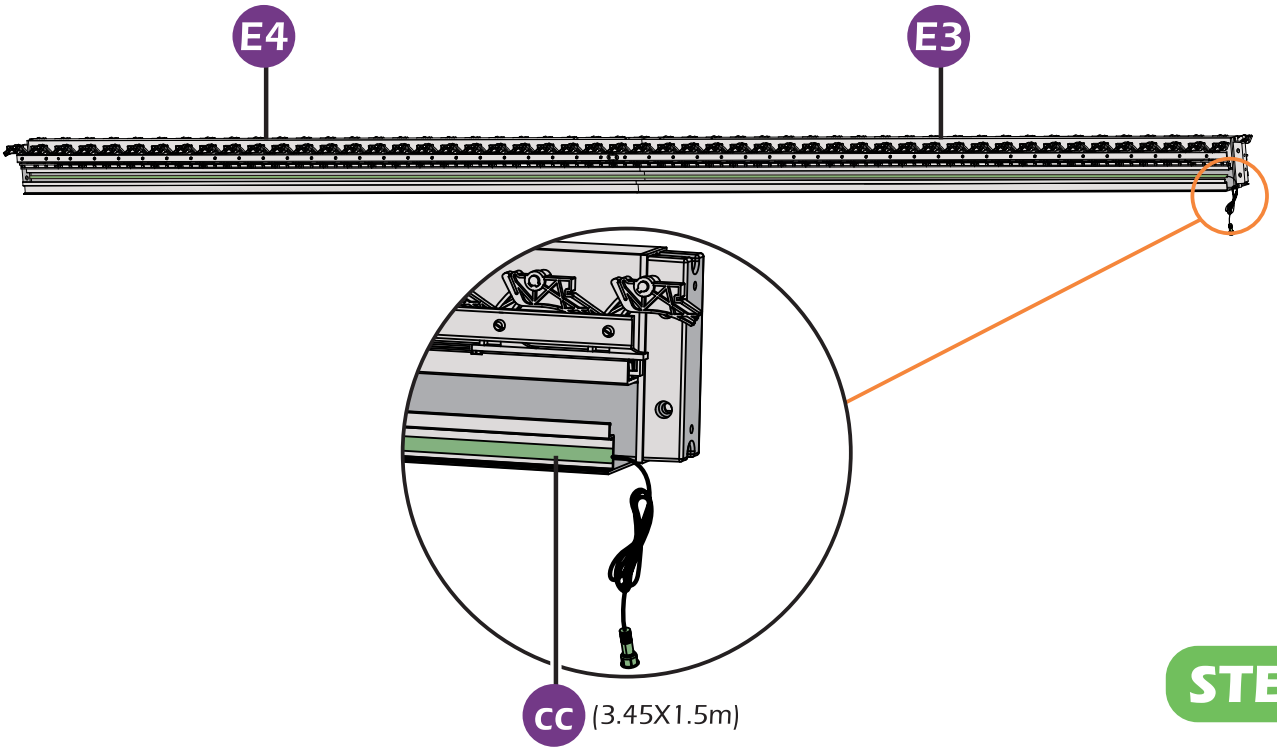

STEP 2

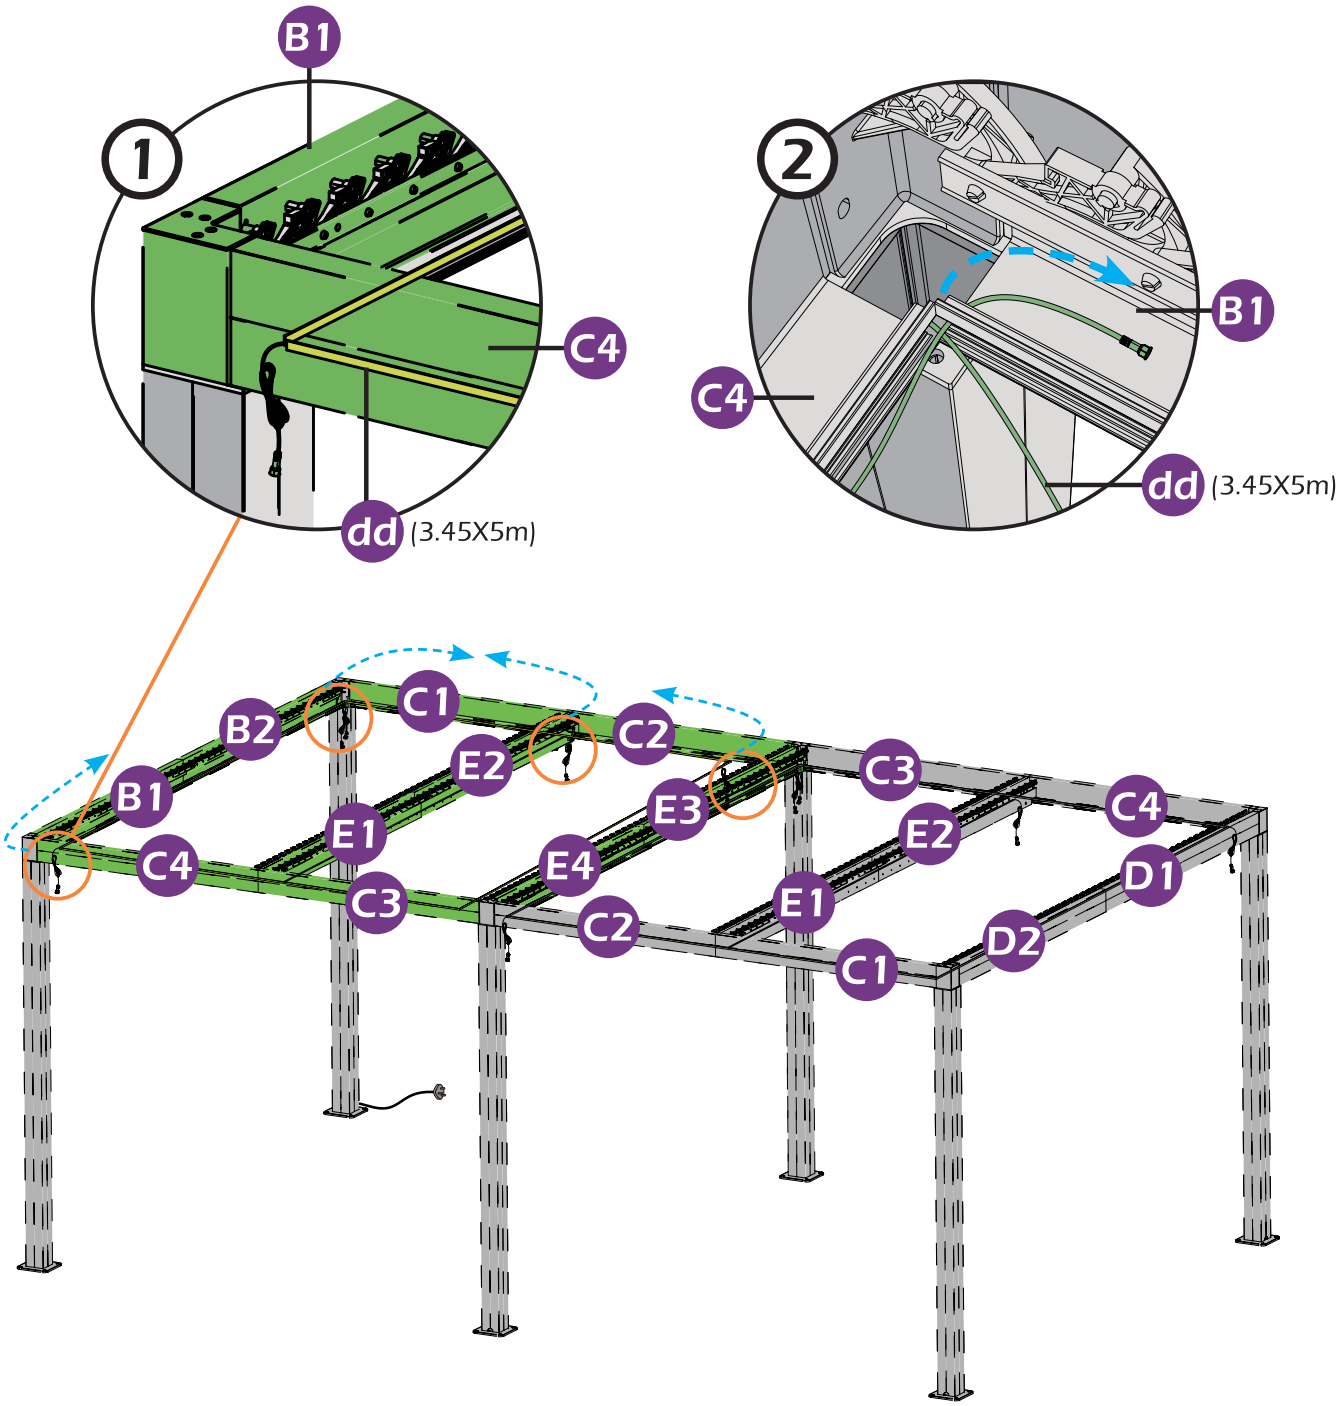

B1
1
C4
dd (3.45X5m)
2
B1
C4
dd (3.45X5m)
C1
B2
C2
E2
B1
C3
C4
E3
E1
E2
C4
E4
D1
C3
E1
C2
D2
C1

STEP 2

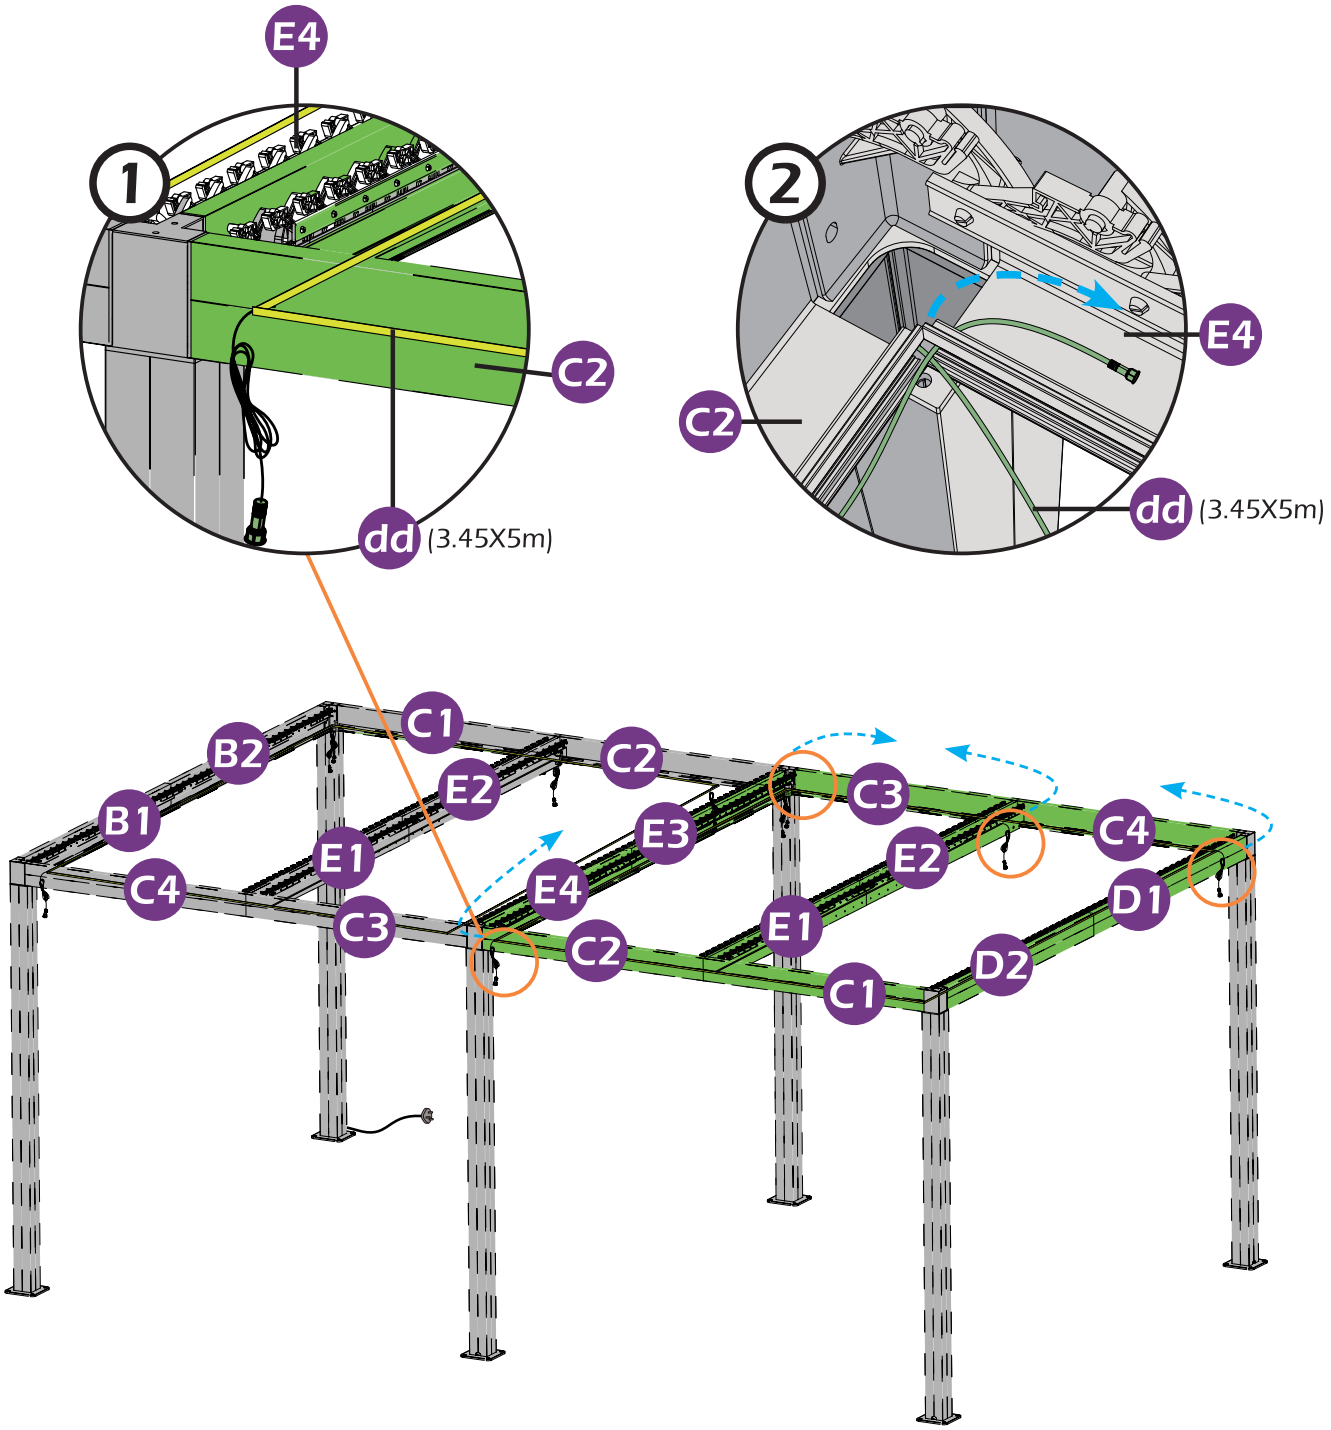

E4
1
C2
dd (3.45X5m)
2
E4
C2
dd (3.45X5m)
C1
B2
C2
E2
C3
B1
E3
E2
C4
E1
C4
E4
D1
C3
E1
C2
D2
C1

STEP 2


aa ×1




hh-2×1




II ×2




Attention: An electric drill was required to drill pilot holes. Please keep the control box away from the water tank bottom at least 0.8 inch.

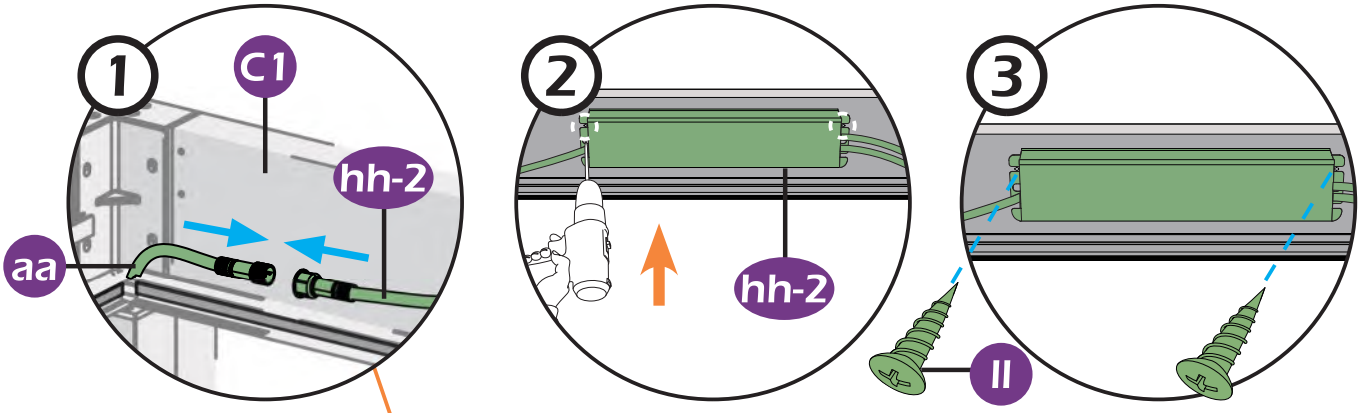

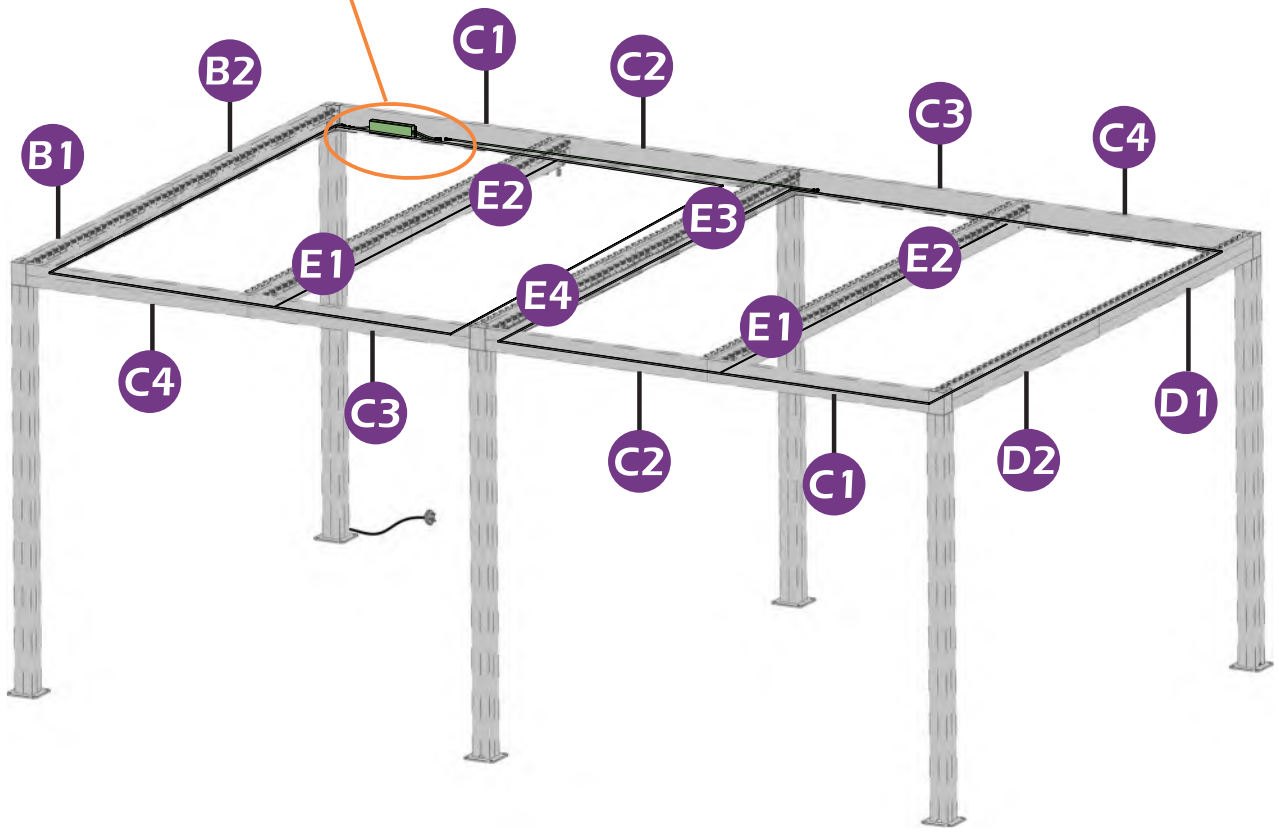


STEP 3


nn ×1

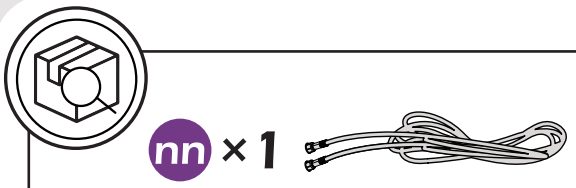


Attention: Connect extension cable nn to accessory hh-2, then route extension cable nn to beam C3 as shown in the figure.

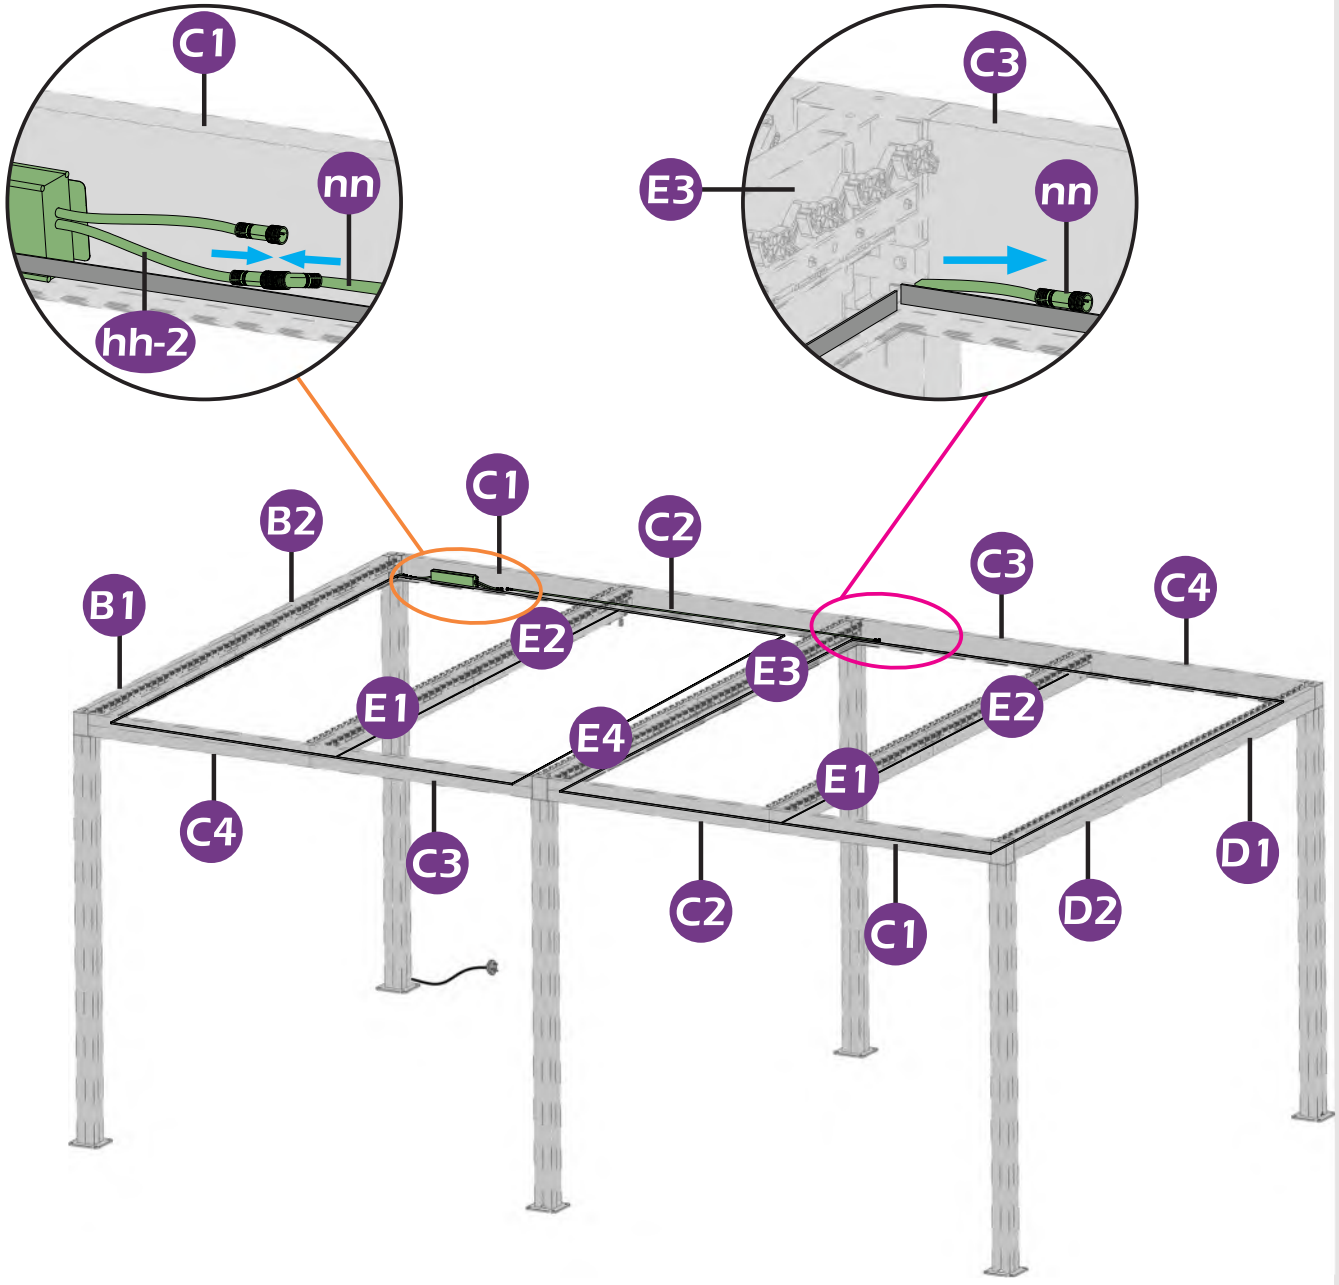


STEP 3

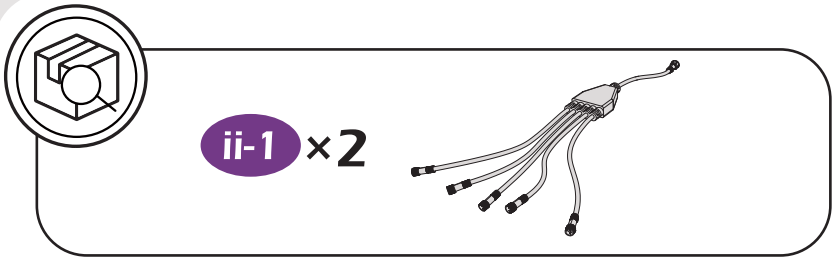

ii-1 ×2

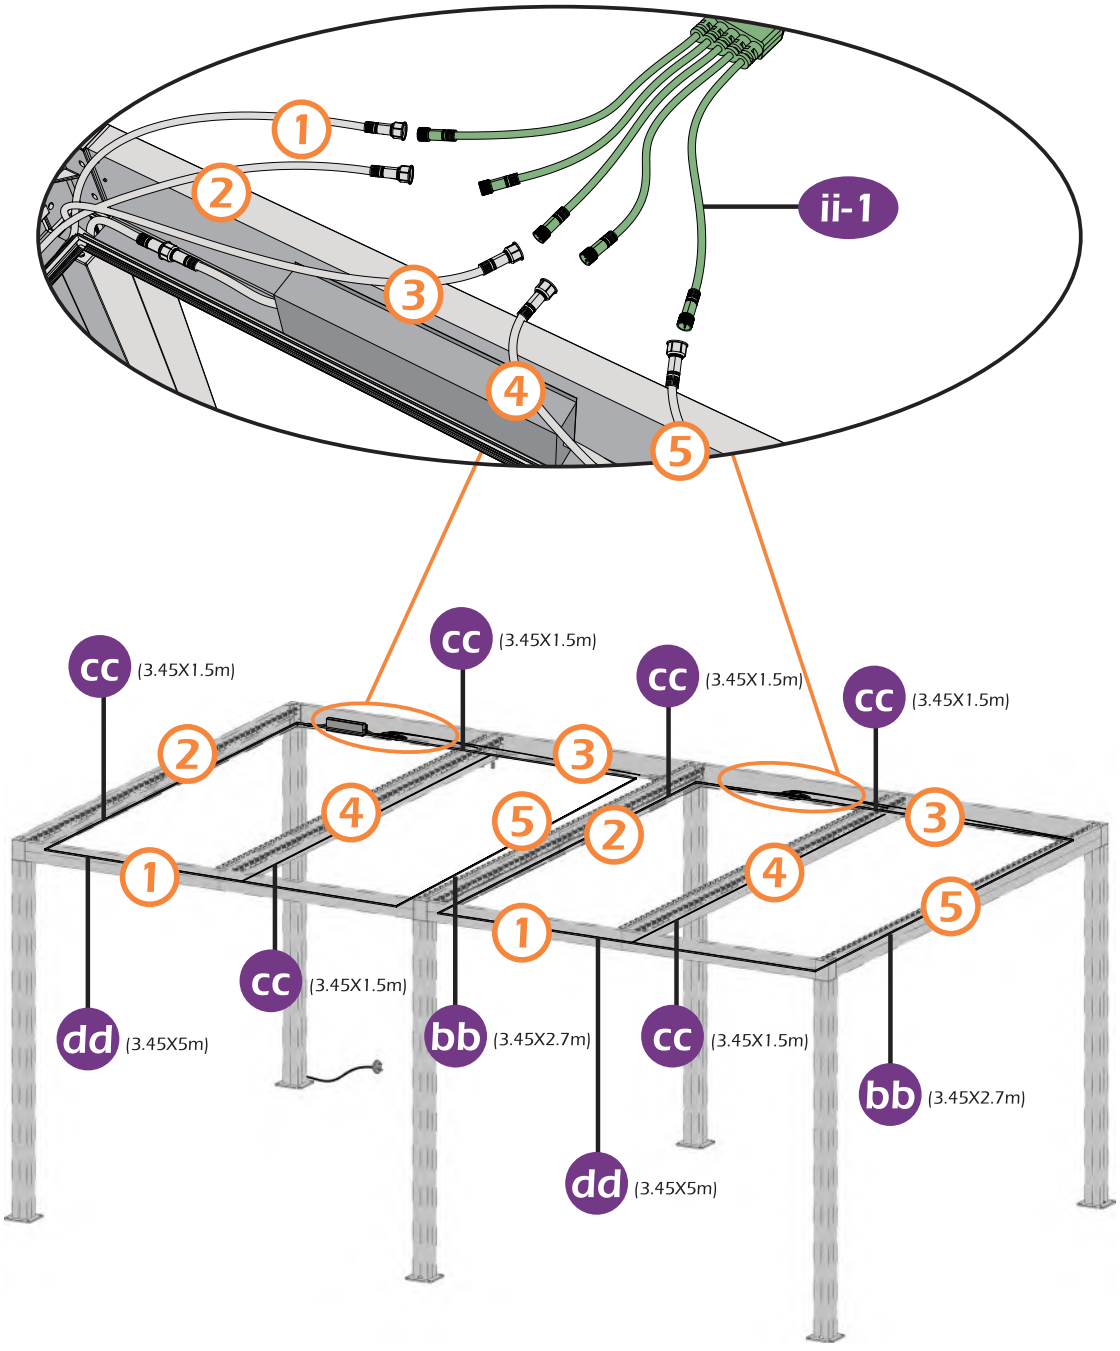
1
2
3
4
5
ii-1
cc (3.45X1.5m)
cc (3.45X1.5m)
cc (3.45X1.5m)
cc (3.45X1.5m)
dd (3.45X5m)
cc (3.45X1.5m)
bb (3.45X2.7m)
cc (3.45X1.5m)
bb (3.45X2.7m)
dd (3.45X5m)

STEP 4

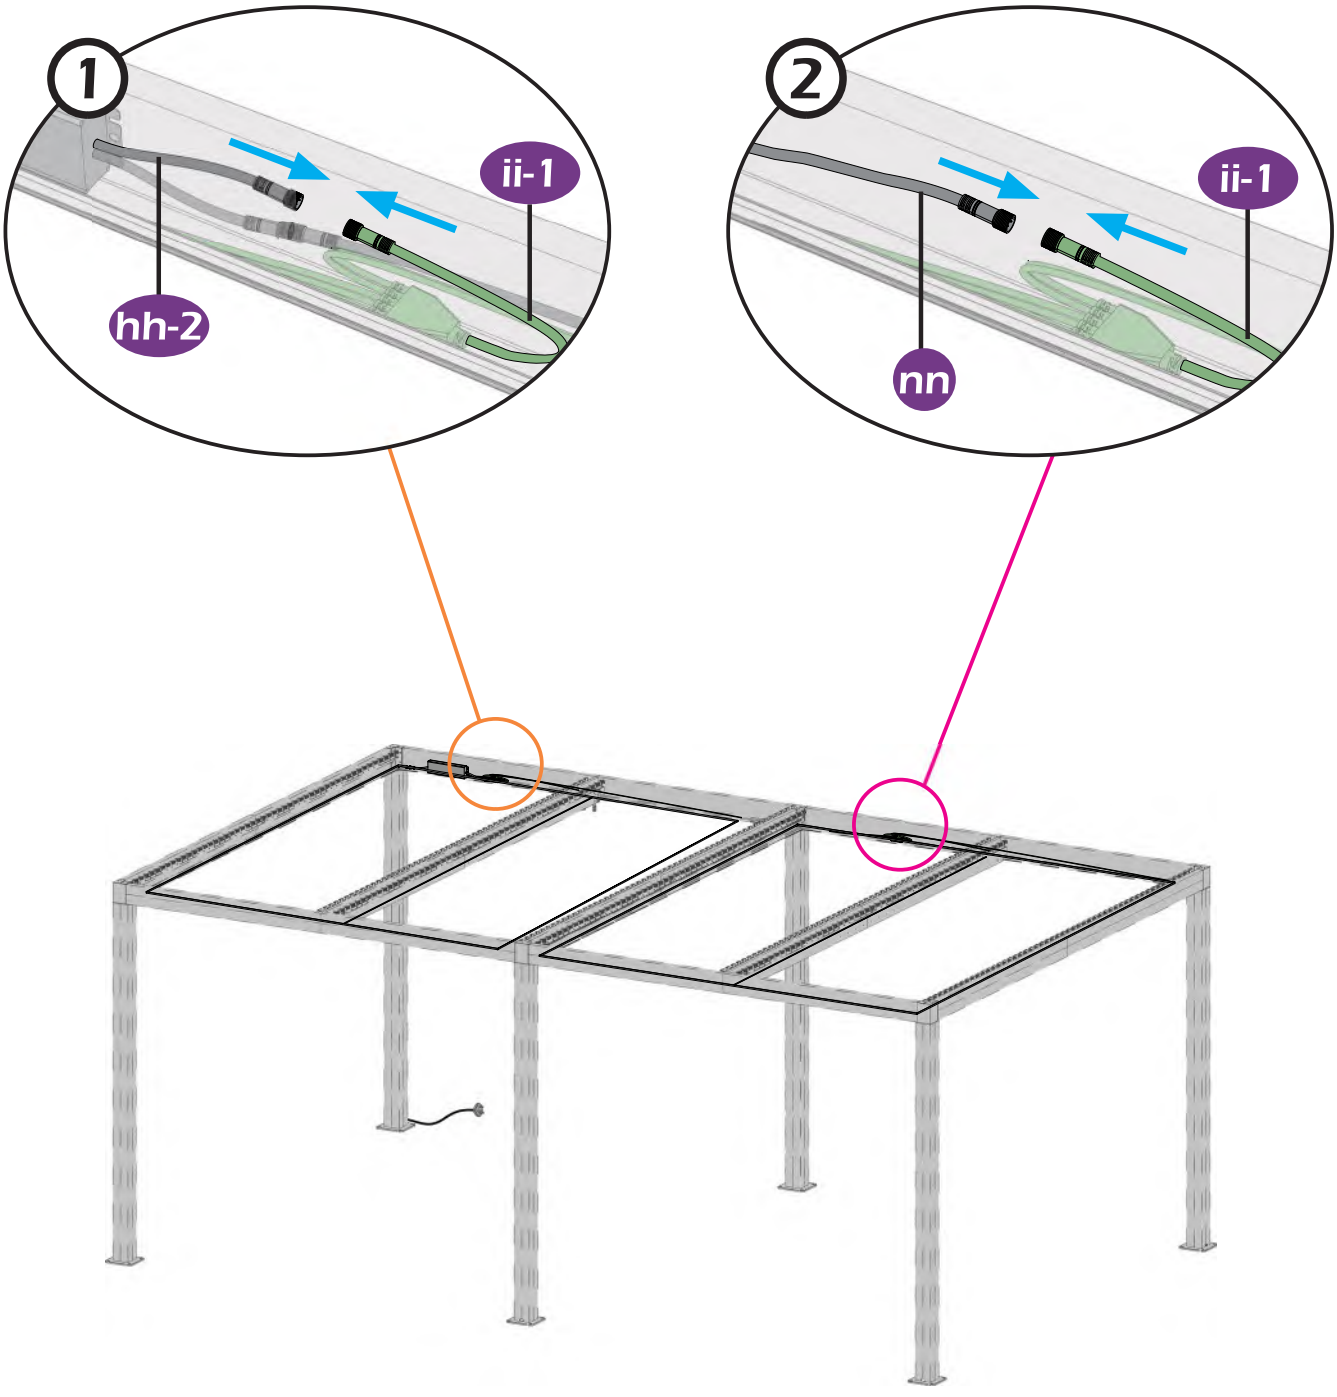


STEP 4

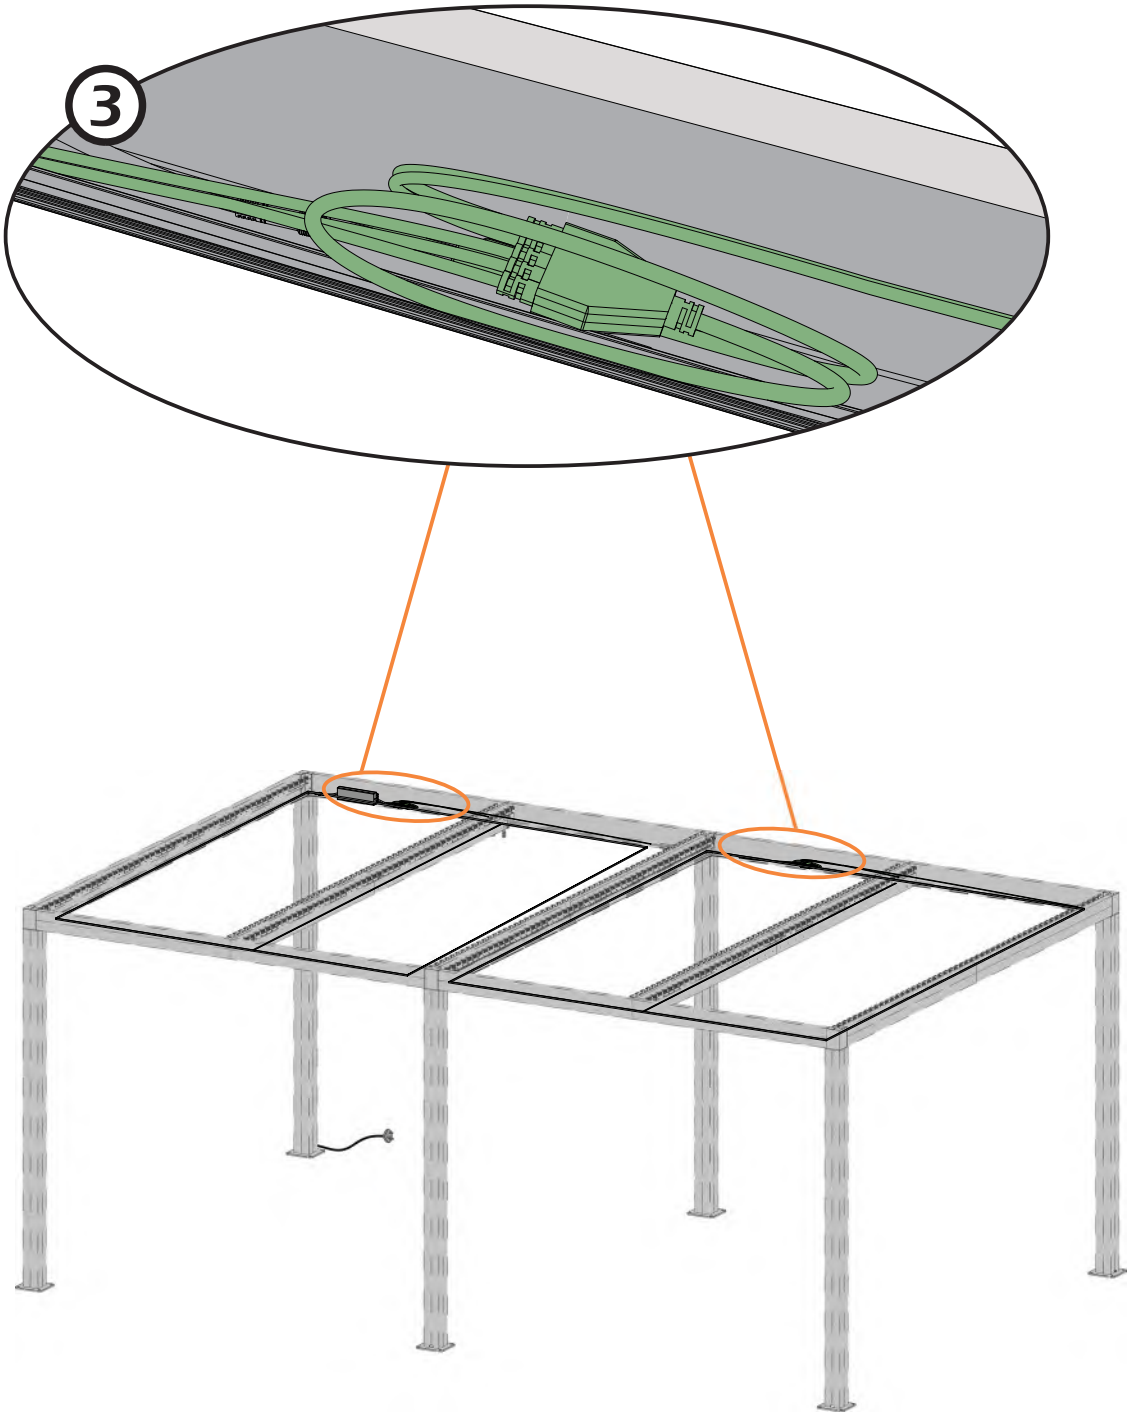


STEP 4


jj ×1




II ×2



Attention: An electric drill was required to drill pilot holes.

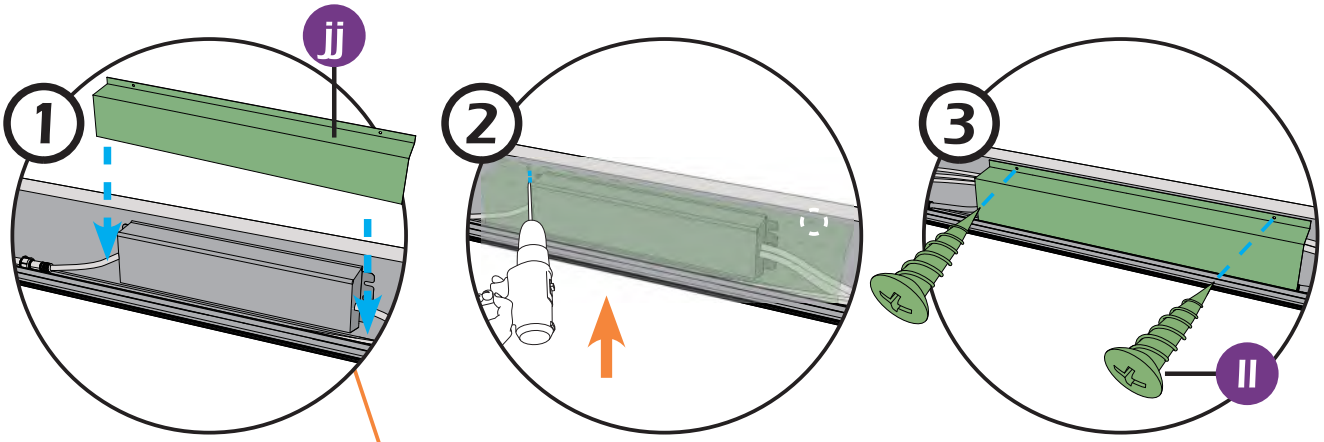


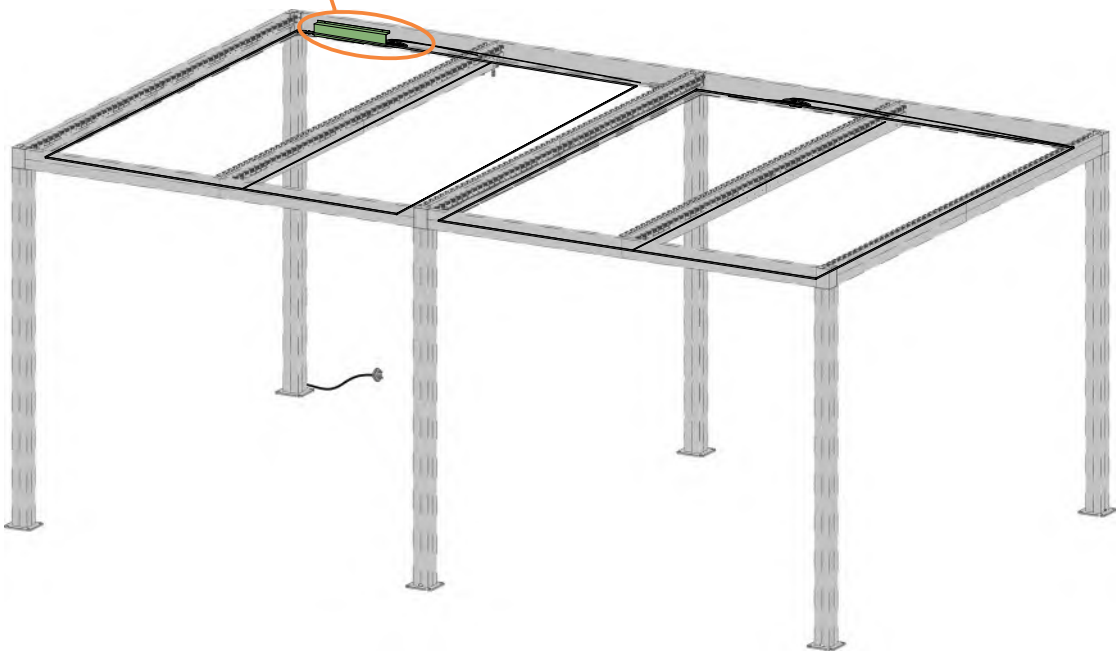

STEP 5

mm1 ×10
(1707mm)


mm2 ×10
(1781mm)

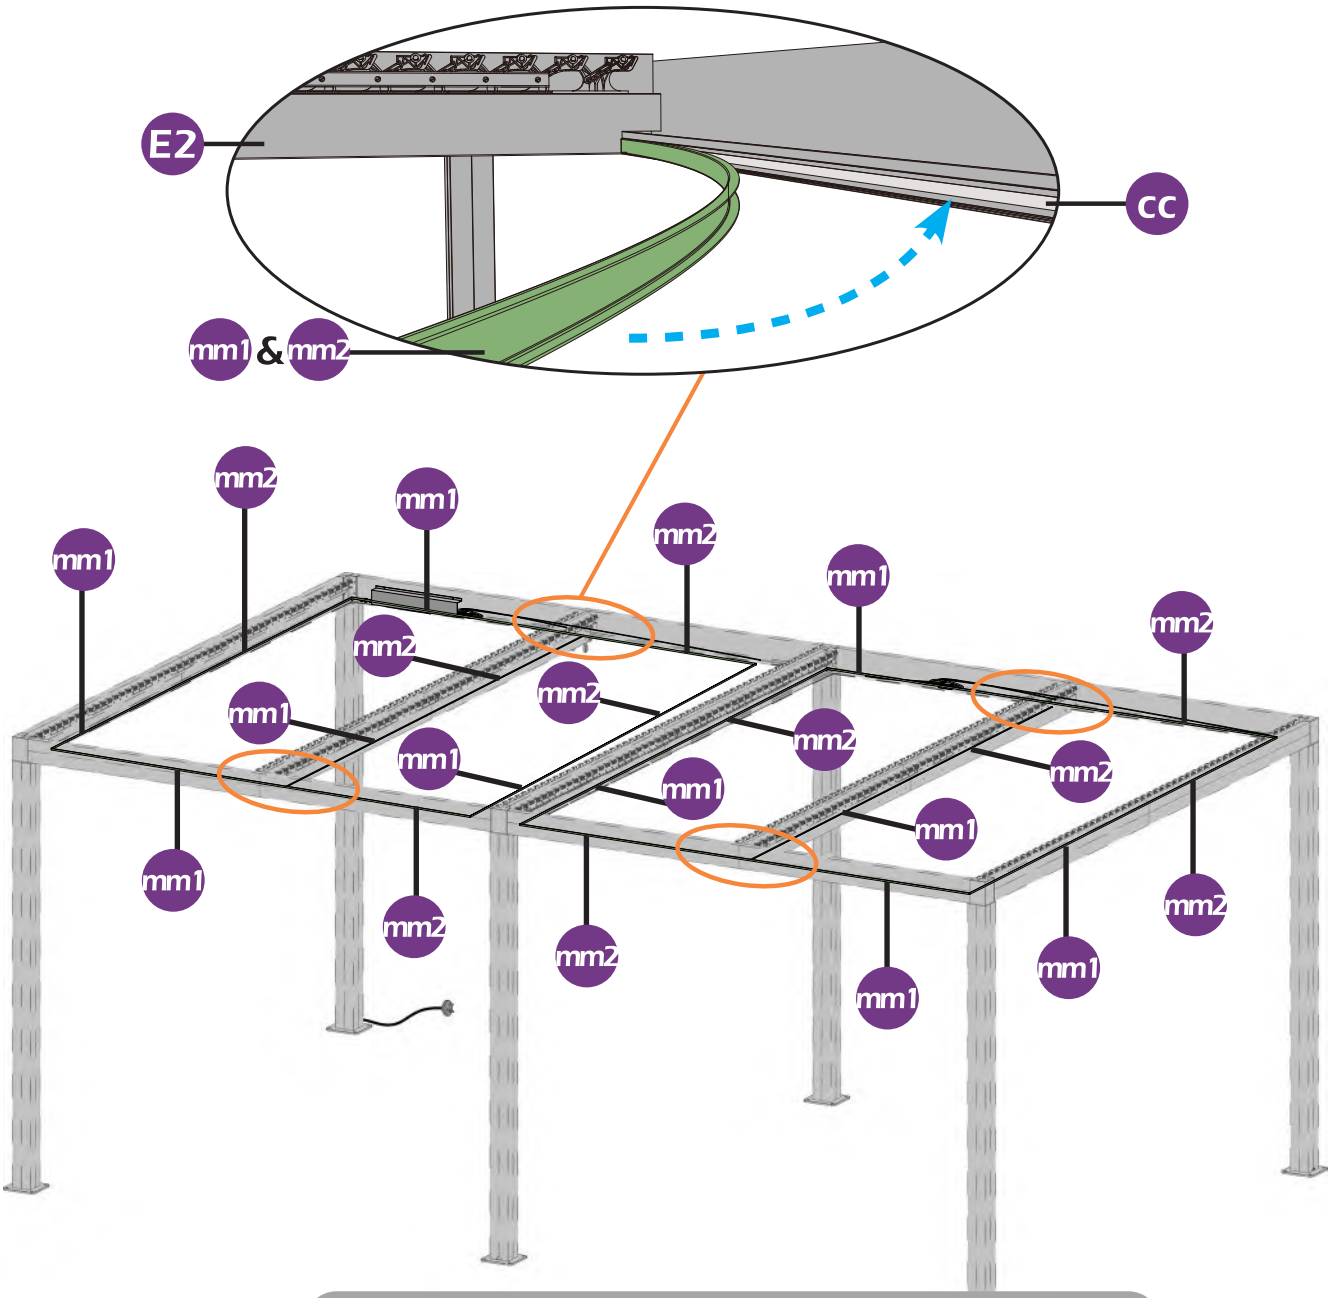


If part mm1 or mm2 is too long or is stuck in the circled position, please cut the part to fit the louvered pergola.

STEP 6


Remote Control Instructions

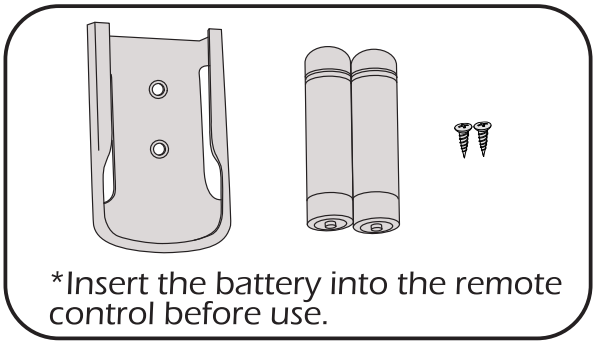


*Insert the battery into the remote control before use.

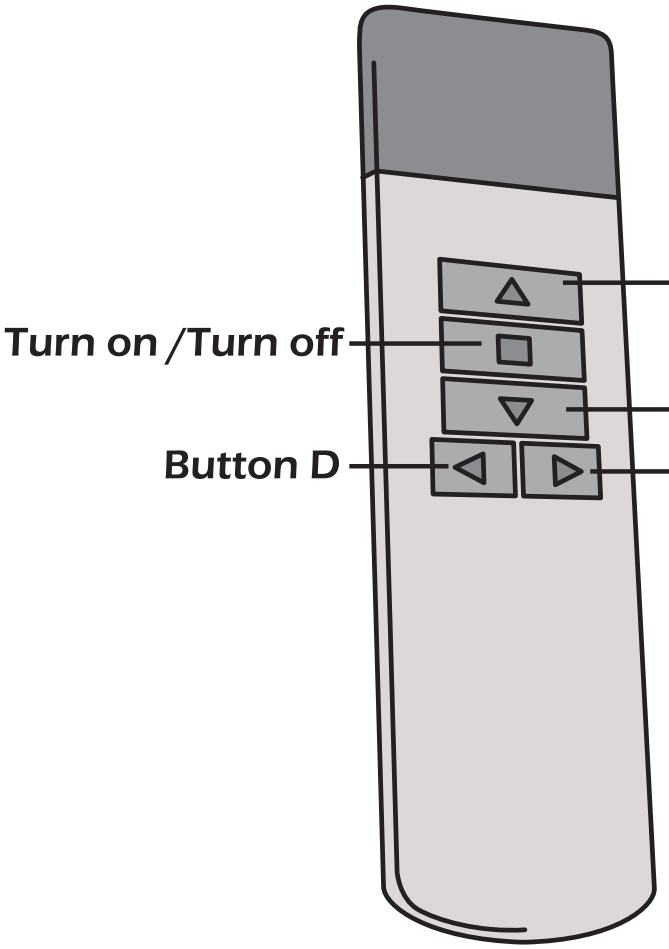

*** Single-color light strip, with 5 brightness levels.**

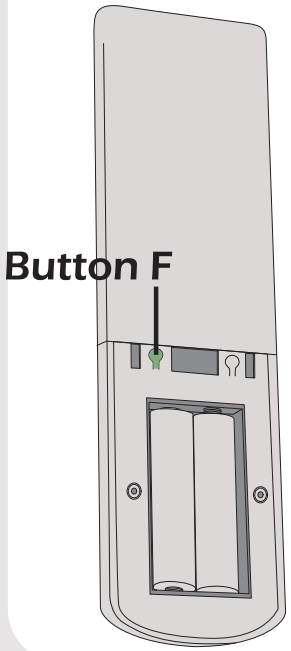



Red light illuminates during remote-control pairing


Remote Control Pairing (For Replacement Remote Only):


1. Install batteries in the new remote.
2. Press and hold the **D**/**E** button until the red light illuminates.
3. Within 15 seconds, press the **F** button. The red light will turn off to confirm successful pairing.

Tip: If the red light goes out before you can press **F**, press the power button once to reactivate the red light, then press **F** to pair.

Remote control installation

* The remote control can be attached to the post with screws as shown in the figures below.

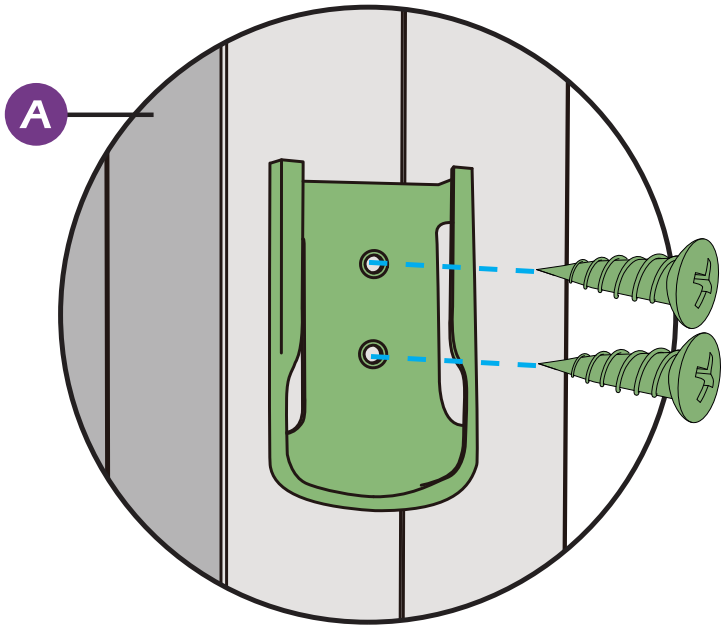

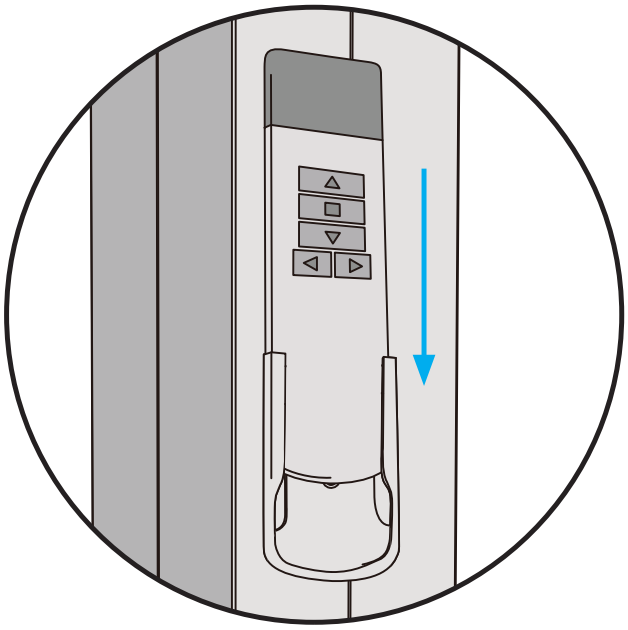



Warranty

Bolts & Nuts

Bolts and nuts are warranted to be free from defects in material and workmanship for 1 year from item purchased. Damage from exposure to chemicals (including not only oils, spills, fluids) won't be covered by this warranty.

Warranty Limitation

This warranty is for the original purchase order only. (Order number required). This warranty is non-transferable. Purple Leaf is responsible for the free replacement part including shipping charges for the 1 year warranty.

Warranty Exclusion

This warranty does not cover products subject to negligence, abuse usage, inappropriate installation. Purple Leaf reserves the right to explain warranty exclusions. When the replacement item is applied, the 1 year warranty automatically expires. Please feel free to contact us to apply for a warranty.

FCC Warnning:

This equipment has been tested and found to comply with the limits for a Class B digital device,pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

• Reorient or relocate the receiving antenna.
• Increase the separation between the equipment and receiver.
• Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
• Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1)This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 0cm between the radiator and your body.



Purple Leaf Inc.
15950 Boyle Avenue, Fontana
CA, 92337, US
pergola@purpleleafgarden.com
©Copyright 2013-2027 Purple Leaf Inc.
All Rights Reserved.V.2