DoorBird
Technology meets Design.









Sample image



Engravable stainless steel panel included in delivery.

D2101IKH

IP VIDEO DOOR STATION

For single-family houses and commercial buildings with 1 unit
Info Module • Keypad Module • 1 Call Button

Designed, developed and made in Germany



ANSWER YOUR DOOR ANYWHERE.

ADVANTAGES

HOW DOES IT WORK?

Imagine, you are not at home and your children have locked themselves out or the courier wants to deliver a parcel. With DoorBird this is no longer a problem. Every time someone rings the doorbell you will get a push notification on your smartphone or tablet. Via the DoorBird App you can talk to visitors and also see them live in HD quality. You will never miss a visitor again. With DoorBird you are on the move and yet at home, even if a burglar rings at the door to check if someone is at home.

SMART HOME STARTS AT THE FRONT DOOR

DoorBird is the smart solution for your house entrance. Simply connect your DoorBird IP Video Door Station to your smartphone and talk to your visitor – anywhere you are. The IP Video Door Station can be used as a stand-alone unit or can be integrated into an existing Smart Home platform. Even existing classic installations such as an electric door opener can still be used and controlled via the DoorBird App.

QUALITY MADE IN GERMANY

All DoorBird products are designed, developed and produced by Bird Home Automation Group in Berlin, Germany. We manufacture all products with the greatest care and precision, and deliver them to our customers all over the world.

Open API

- Local interface for integration with third-party systems and SIP

Video and audio call

- On smartphones, tablets (iOS, Android), IP and landline phones (SIP)

Smart Transmission Mode (STM)


- Real-time audio / video communication, optimized for mobile devices via WiFi, 3G, 4G, 5G

Smart Home & NVR compatible

- Control4, Loxone, Crestron, Synology, AVM FRITZ!Fon, URC, QNAP, RTI, ELAN, Fibaro, Bang & Olufsen and others

Light sensor

- For night vision mode

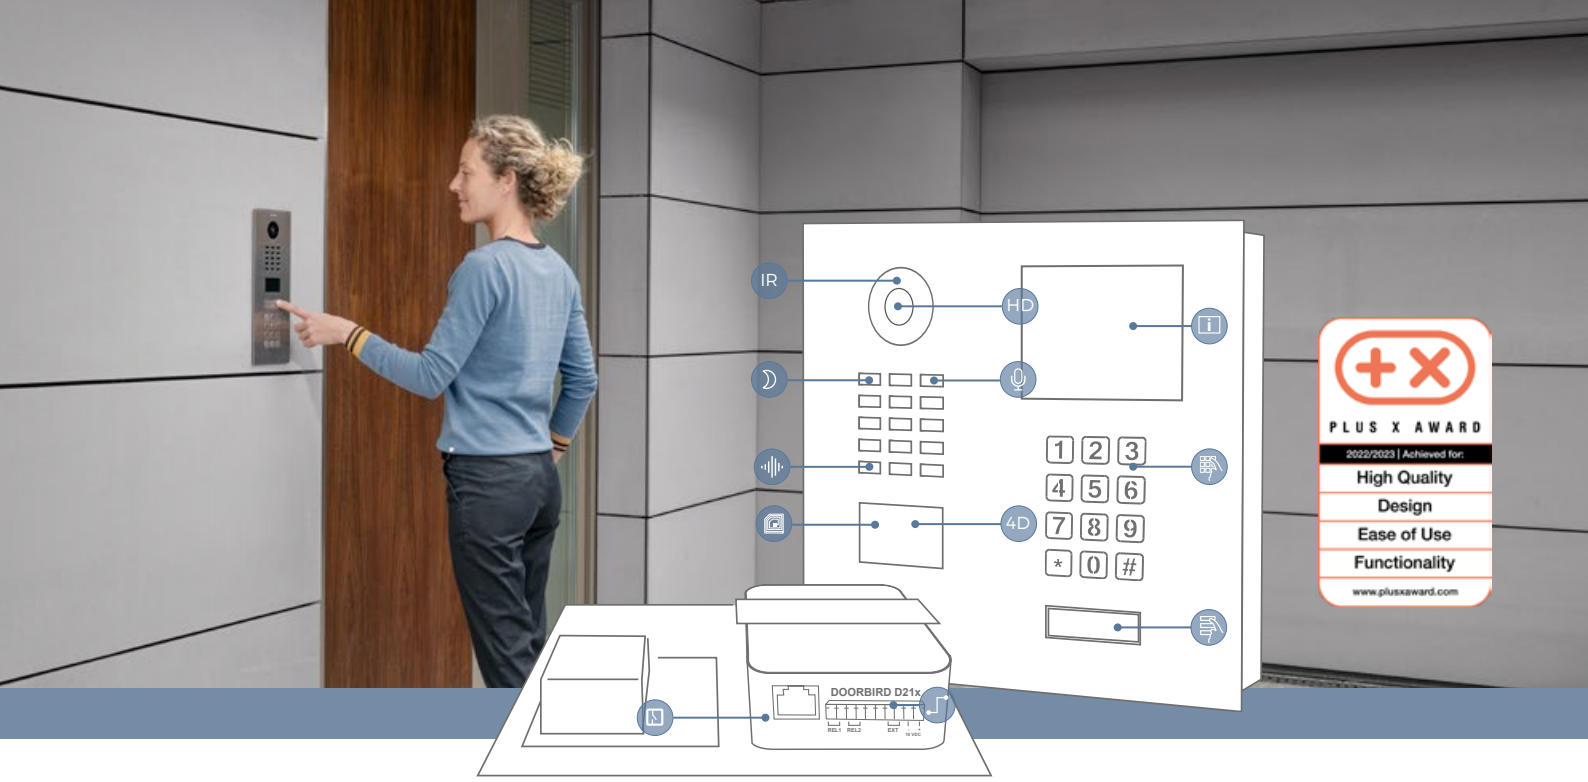

Automatic door buzzer
- For use in medical offices and office environments

HDTV Video
- Ultra wide-angle, hemispheric lens, 180°

Info Module
- 3.5", illuminated
- Optionally with stainless steel cover

Free visitor history
- Store still images for free, optional video recording available

Motion sensor with 4D technology
- Distance up to 10 m adjustable via App (interval: 1 m)

Noise reduction and echo cancellation (AEC, ANR)

Individual action schedules, e.g.:
- RFID card "abc" has only access on Wednesday from 9 am until 11 am
- 4D motion sensor switches on external lamp between 9 pm and 6 am

Two freely configurable bi-stable switching relays
- Two doors or gates can be controlled via App
- Status configurable via App: temporary or permanent circuit

Keypad Module
- Configurable via App
- Up to 500 individual PIN codes
- Individual events (e.g. trigger a relay, HTTP(s) request)

Geofencing
- Automatic door and gate opening when returning home

RFID reader
- Configurable remotely via App (e.g. time frame)

Easy connection to the network
- Connection via a network cable or bell wire via 2-Wire Ethernet PoE Converter "DooBird A1071" (PoE, network data)

Night vision
- With 12 Infrared LEDs

Call button
- With backlit nameplate

Microphone
- Clear voice transmission

TECHNICAL SPECIFICATIONS

DoorBird
Technology meets Design.

GENERAL

Front panel	3 mm (0.12 in) Available in brushed stainless steel V2A / V4A and V2A with bronze and titanium finish, DB 703, RAL 7016, Graphite Black (Raven Polar)
Mounting type	Flush- or surface-mounted, mounting housing sold separately
Power supply	15 V DC (max. 15 W) or Power over Ethernet (PoE 802.3af Mode-A)
Call button	Illuminated
Nameplate	Stainless Steel, Bell symbol, engraved through material for illumination, self-adhesive. Engravable metal nameplate sold separately, see www.doorbird.com/buy
Info Module	3.5", illuminated
Keypad Module	12 keys, illuminated, configurable via App, e.g. • Individual PIN codes • Individual events (e.g. switch a relay, HTTP(s) request) • Individual schedules • Up to 500 PIN codes manageable • 30 most recent entries viewable in history
Weight	2510 g
Connectors	• RJ45, for LAN/PoE • Bistable latching relay #1, max. 24 V DC/AC, 1 Ampere, e.g. for electric door opener • Bistable latching relay #2, max. 24 V DC/AC, 1 Ampere, e.g. for electric door opener • External input for external door opener button • 15 V DC input (+, -), max. 15 W • Relays can be expanded / detached with DoorBird I/O Door Controller
Weather-proof	Yes, IP65
Approvals	IP65, CE, FCC, IC, RoHS, IK08, REACH, IEC/EN 62368, IEC/EN 62471
Dimensions	256 x 275,25 x 48,75 mm (H x W x D) 10,08 x 10,13 x 1,92 in (H x W x D)
Operating conditions	-25 to +55˚C / -13 to 131˚F Humidity 10 to 85 % RH (non-condensing)
Scope of delivery	1x Main Electrical Unit 1x Front panel 1x Illuminated Info Module 1x Engravable panel, stainless steel 1x Nameplate for 1 call button, stainless steel, bell symbol 1x Nameplate for 1 call button, plastic, transparent 1x RFID key fob 1x Screwdriver 1x Quickstart guide with Digital Passport 1x Installation manual 1x Small parts
Warranty	see www.doorbird.com/warranty

CURRENT SYSTEM REQUIREMENTS

System requirements	Mobile device: Newest iOS on iPhone/iPad, newest Android on Smartphone/Tablet Internet: High-Speed Landline Broadband Internet connection, DSL, cable or fiber optic, no socks or proxy server Network: Ethernet Network, with DHCP
Recommended installation height	Camera lens should be at a min. height of 145 cm (57 in). Before the installation please determine your optimal installation height.

VIDEO

Camera	HDTV 720p, dynamic (VGA – HDTV)
Lens	High-end ultra wide-angle hemispheric lens 180˚ (D), 140˚ (H), 100˚ (V), straightened, IR-capable
Night-vision	Yes, light sensor, automatic IR-cut filter, 12 Infrared LEDs (850 nm)

AUDIO

Audio components	Speaker and microphone, noise reduction and echo cancellation (ANR, AEC)
Audio streaming	Two-way, full duplex

NETWORK

Ethernet	RJ45 jack, PoE 802.3af Mode-A, 10/100 Base-T
Supported protocols	HTTP, HTTPS, SSL/TLS, Bonjour, DNS, RTSP, RTP, TCP, UDP, RTCP, ICMP, DHCP, ARP, SIP, DTMF (RTP [RFC-2833], SIP INFO [RFC-2976]), STM

MOTION SENSOR

Type	Active
Detection angle	54˚ (H), 70˚ (V)
Range	1 - 10 m (3.3 - 32.9 ft), depends on environment, configurable in 1 m (3.3 ft) steps.
Technology	4D. Based on multiple integrated sensors and algorithms, e.g. Radio Frequency Energy (RFE)
Configuration	Via App, e.g. • Range (1 - 10 m / 3.3 - 32.9 ft) • Movement direction (coming, leaving, both) • Individual events (e.g. switch a relay, push notification, SIP call [audio/video], HTTP(s) notification) • Individual schedules

RFID

Type	Active Reader Passive Tag (ARPT) system
Standard	ISO/IEC 18000-2:2009 Part 2, EM4100, EM4102
Frequency	125 KHz
Range	0 - 3 cm, depends on environment
Antenna	Internal
Compatible Transponder	RFID key fobs, sold separately, see www.doorbird.com/buy Up to 500 tags manageable
Configuration	Via App, e.g. • Tag (add, delete) • Individual events (e.g. switch a relay, SIP call [audio/video], HTTP(s) notification) • Individual schedules • RFID history available for 60 minutes in the app

INTEGRATED WIRELESS MODULES

RFID	125 KHz
Sensor	24 GHz, can be disabled

THIRD-PARTY INTEGRATION (DOORBIRD CONNECT)

Partnerintegrations	see www.doorbird.com/connect
API	see www.doorbird.com/api
Simultaneous video streams	One, for event-based and continuous recording


OPTIONAL ACCESSORIES

Sold separately	• Power supply unit (mains adaptor) with 4 country-specific outlet adaptors (110 - 240 V AC to 15 V DC) – EAN 4260423867314 • Surface-mounting housing, flush-mounting housing, Protective-Hood • See www.doorbird.com/buy

Special remarks:
Assembly requires professional skills or a technician.

Errors and omissions excepted. | Last update 11/2022 - Copyright © Bird Home Automation GmbH – www.doorbird.com

Front panel material thickness: 3.0 mm (0.12 in)

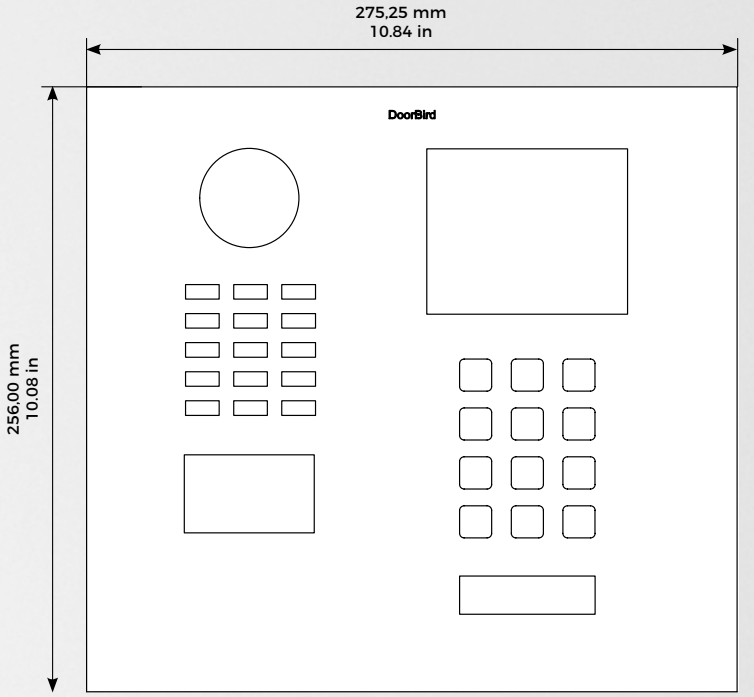

Frontpanel

Errors and omissions excepted. | Last update 11/2022 - Copyright © Bird Home Automation GmbH – www.doorbird.com


PLUS X AWARD
2022/2023 | Achieved for:
High Quality
Design
Ease of Use
Functionality
www.plusxaward.com
Dorfeld