

# TOMAHAWK

## ELECTRIC PLATE COMPACTOR


MODEL NUMBER: eJXPC20

Operations Manual

SCAN FOR ASSEMBLY GUIDE



HOW TO VIDEOS, MANUALS,  
COMPACTION GUIDES, & MORE

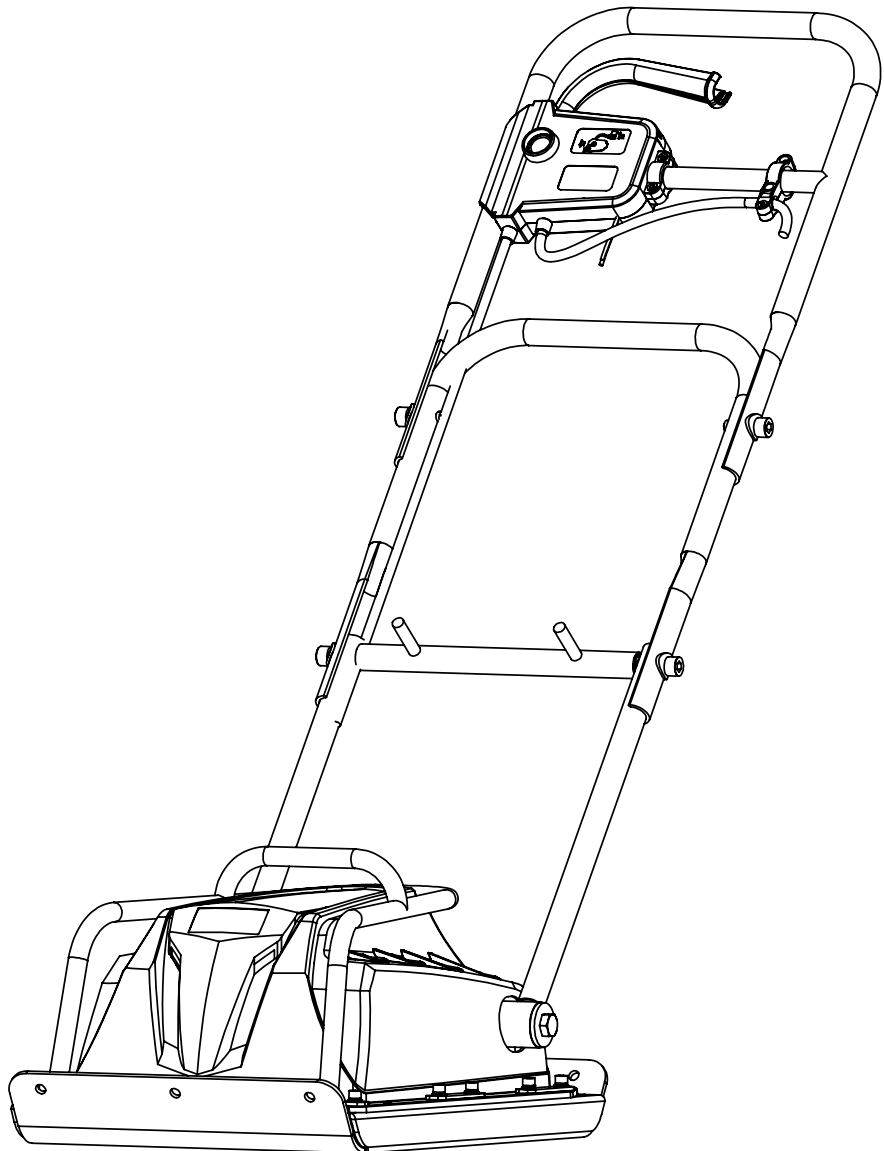

To reduce the risk of injury, the user must read and understand the Operator's Manual before using this product. Save these instructions for future reference.

# Table of Contents

<b>1. SAFETY INFORMATION</b>	<b>4</b>
1.1 Fire Safety	5
1.2 Operating Safety	5
1.3 Service Safety	6
1.4 Electric Motors	7
1.5 Plugs	7
1.6 Extension Cables	7
1.7 NVR - No Volt Release	8
1.8 Health and Safety	8
<b>2. TECHNICAL DATA</b>	<b>8</b>
2.1 Product Features	8
2.2 Product Dimensions	8
2.3 Compactor Specifications	9
2.4 Product Parts	9
<b>3. COMPACTION</b>	<b>10</b>
3.1 Reasons for Compaction	10
3.2 Compaction Specification	10
3.3 Applications	10
<b>4. OPERATION</b>	<b>10</b>
4.1 Pre Start Checks	11
4.2 Operating Instructions	11
4.3 Starting the Motor	12
4.4 Stopping the Motor	12
<b>5. SERVICE &amp; MAINTENANCE</b>	<b>12</b>
5.1 Maintenance	12
5.2 Cleaning	12
5.3 Maintenance Record	13
5.4 Replacement Parts	13
5.5 Storage	13
<b>6. TROUBLESHOOTING</b>	<b>14</b>
<b>7. WARRANTY</b>	<b>15</b>
7.2 Warranty Claims	15
<b>8. SERVICE CENTERS</b>	<b>15</b>
<b>9. MORE COMPACTION TIPS</b>	<b>16</b>
<b>10. PARTS MANUAL</b>	<b>22</b>

# Register Your Equipment

Thank you for purchasing TOMAHAWK equipment! Your product is covered by the TOMAHAWK Warranty policy, but in order to activate your warranty, we need you to register your product. In addition to activating your equipment warranty, product registration will grant you access to important product updates, streamlined customer service and more.

## INCLUDED WITH YOUR REGISTRATION

- ✓ Equipment Warranty Activation
- ✓ Product Updates
- ✓ Streamlined Customer Service
- ✓ Exclusive Discounts and Sales

## STEPS TO REGISTER YOUR EQUIPMENT

1. Visit [www.tomahawk-power.com](http://www.tomahawk-power.com)
2. Choose “Product Registration” at the bottom of the page
3. Enter your equipment’s serial number to get started
4. Provide all required information
5. Submit Registration

---

# Equipment Resources

Tomahawk Customer Service doesn’t stop at checkout. We understand to keep a job-site running smoothly - the proper equipment, spare parts, instruction manuals, and more are needed at the drop of a hat. Visit [www.tomahawk-power.com](http://www.tomahawk-power.com) to gain access to the incredible resources below.

## How To Video Library

More of a visual person? Visit our Video Library for equipment assembly instructions, troubleshooting tips, and more!

**Found on each product listing or the Service Videos Page**

## Manual and Assembly Guide Library

Visit our Manual Library if you are looking for a lost operations manual or a particular spare part?

**Found on each product listing or the Tomahawk Manuals Page**

## Service Requests

In need of a quick fix or a service center referral? Submit a Service Request and a Tomahawk Technician will respond shortly to get you the help you need.

**Choose “Service Request” at the bottom of [www.tomahawk-power.com](http://www.tomahawk-power.com)**



This manual provides information and procedures to safely operate and maintain this model. For your own safety and protection from injury, carefully read, understand and observe the safety instructions described in this manual.

Keep this manual or a copy of it with the machine. If you lose this manual or need an additional copy, please contact Tomahawk Power LLC or visit [www.tomahawk-power.com](http://www.tomahawk-power.com). This machine is built with user safety in mind; however, it can present hazards if improperly operated and serviced. Follow operating instructions carefully. If you have questions about operating or servicing this equipment, please contact Tomahawk Power.

The information contained in this manual is based on machines in production at the time of publication. Tomahawk Power reserves the right to change any portion of this information without notice.

No part of this publication may be reproduced in any form or by any means, electronic or mechanical, including photocopying, without express written permission from Tomahawk Power.

Any type of reproduction or distribution not authorized by Tomahawk Power represents an infringement of valid copyrights and will be prosecuted. We expressly reserve the right to make technical modifications, even without due notice, which aim at improving our machines or their safety standards.

## 1. Safety Information

This manual contains DANGER, WARNING, CAUTION, and NOTE callouts which must be followed to reduce the possibility of personal injury, damage to the equipment, or improper service.



This is the safety alert symbol. It is used to alert you to potential personal injury hazards. Obey all safety messages that follow this symbol to avoid possible injury or death.



**DANGER** indicates an imminently hazardous situation which, if not avoided, will result in death or serious injury.



**WARNING** indicates a potentially hazardous situation which, if not avoided, could result in death or serious injury.



**CAUTION** indicates a potentially hazardous situation which, if not avoided, may result in minor or moderate injury.

## 1.1 Fire Safety

If your machine catches fire, turn off the electric supply. Using a dry powder or CO2 fire extinguisher, put out the fire. If the fire cannot be put out, keep away and call the fire department. If you are in any doubt about the safety condition of your machine, please consult Tomahawk Power.

## 1.2 Operating Safety



Familiarity and proper training are required for the safe operation of equipment!

Equipment operated improperly or by untrained personnel can be dangerous! Read the operating instructions contained in both this manual and the engine manual and familiarize yourself with the location and proper use of all controls. Inexperienced operators should receive instruction from someone familiar with the equipment before being allowed to operate the machine.

**1.2.1 NEVER** allow anyone to operate this equipment without proper training. People operating this equipment must be familiar with the risks and hazards associated with it.

**1.2.2 NEVER** use accessories or attachments for this equipment, which are not recommended by TOMAHAWK POWER. Damage to the rammer and/or injury to user may occur.

**1.2.3 NEVER** leave machine running unattended.

**1.2.4 ALWAYS** be sure operator is familiar with proper safety precautions and operation techniques before using machine.

**1.2.5 ALWAYS** wear hearing protection when operating equipment.

**1.2.6 ALWAYS** wear protective clothing appropriate to the job site when operating equipment.

**1.2.7 ALWAYS** wear hearing protection when operating equipment.

**1.2.8 ALWAYS** store equipment properly when it is not being used. Equipment should be stored in a clean, dry location out of the reach of children.

**1.2.9 ALWAYS** operate machine with all safety devices and guards in place and in working order. **DO NOT** modify or remove safety devices. **DO NOT** operate machine if any safety devices or guards are missing or inoperative.

**1.2.10 ALWAYS** read, understand, and follow procedures in Operator's Manual before attempting to operate equipment.

## 1.3 Service Safety



WARNING

For your own personal protection and for the safety of those around you, please read and ensure you fully understand the following safety information. It is the responsibility of the operator to ensure that he/she fully understands how to operate this equipment safely. If you are unsure about the safe and correct use of the eJXPC20 Plate Compactor, consult your supervisor.

**1.3.1 DO NOT** attempt to clean or service machine while it is running. Rotating parts can cause severe injury.

**1.3.2 ALWAYS** replace worn or damaged components with spare parts designed and recommended by Tomahawk Power.

**1.3.3 ALWAYS** keep machine clean and labels legible. Replace all missing and hard-to-read labels. Labels provide important operating instructions and warn of dangers and hazards.

**1.3.4** This equipment is heavy and must not be lifted single-handedly. Must be listed with two people or use suitable lifting equipment.

**1.3.5** Cordon off the work area and keep members of the public and unauthorized personnel at a safe distance.

**1.3.6** Personal Protective Equipment (PPE) must be worn by the operator whenever this equipment is being used.

**1.3.7** Make sure you know how to safely switch this machine OFF before you switch it ON in case you get into difficulty.

**1.3.8** Always switch OFF and unplug the motor before transporting, moving it around the site, or servicing it.

**1.3.9** During use, the motor becomes very hot, allow the motor to cool before touching it. Never leave the motor running and/or unattended.

**1.3.10 NEVER** remove or tamper with any guards fitted, they are there for your protection. Always check that guards are in proper condition, if any are damaged or missing, **DO NOT USE THE MACHINE** until the guard has been replaced or repaired.

**1.3.11 NEVER** pull or guide the machine using the cable and never pull on the cable to disconnect the plug.

**1.3.12 DO NOT** operate the machine when you are ill, feeling tired, or when under the influence of alcohol or drugs.

**1.3.13** Ensure that any trailing cable is protected against damage and not liable to be tripped over or trapped underneath the machine.

**1.3.14 DO NOT** use the Motor Guard as a Lifting Point.

**1.3.15 DO NOT** Jet Wash the machine as this could result in serious injury or even death!

**1.3.16 DO NOT** use this machine in wet conditions.



DANGER

**DANGER** The electrical components of the machine **NEVER** be exposed to water or liquid of any kind as this could result in serious injury or even death!

## 1.4 Electric Motors

All portable electric appliances are dangerous if abused. This machine will only operate on one voltage. Check the power supply to ensure it corresponds to the voltage as stamped on the motor. Make sure that the motor is switched OFF before you plug it into the power supply.

When using a portable transformer it must have a minimum output of 3.3kw and be continuously rated. The symbols on the ON/OFF switch are 0=OFF and I=ON in accordance with international standards.



**DO NOT** use an extension cable between the transformer and the power supply. Always ensure that the cable between the 120v machine and transformer is a minimum length of 10ft. Ensure cable is fitted with cable clip to the operating handle at all times.

## 1.5 Plugs

The eJXPC20 Plate Compactor is intended for DIY or site usage, the following plug types are supplied/fitted to the product: 15 amp rated 120 volt plug type.



### **THIS PRODUCT MUST BE GROUNDED**

**IMPORTANT:** The wires in the mains lead are colored in accordance with the following code:

**GREEN / YELLOW = GROUND, BLUE = NEUTRAL, BROWN = LIVE**

The wire which is colored Green and Yellow must be connected to the terminal in the plug marked E or colored Green and Yellow. The wire which is colored Brown must be connected to the terminal in the plug marked L or colored Red. The wire which is colored Blue must be connected to the terminal in the plug marked N or colored Black. Always ensure before connecting to the supply that the supply voltage is the same as the rated voltage marked on the motor

## 1.6 Extension Cables

If you need to use an extension cable it must be no longer than 25 metres (82 feet) in length. The wire section must be 2.5mm<sup>2</sup> on 240v and 2.5mm<sup>2</sup> on 120v. Ensure that the extension cable is carefully laid out avoiding liquids, sharp edges and places where vehicles might run over it. Avoid allowing the extension cable to be trapped underneath the plate compactor. Unroll it fully or it will overheat and could catch fire. Make sure that any extension cable connections are dry and safe.

## 1.7 NVR - No Volt Release

The motors which are fitted to the machine are fitted with a NVR (No Volt Release) Switch. This means that if the power fails, the motor will not automatically restart when the power is restored. The machine will need to be manually restarted.

## 1.8 Health and Safety

### 1.8.1 Vibration

Some vibration from the compacting operation is transmitted through the handle to the operator's hands. Refer to specifications & technical data for vibration levels and usage times (recommended maximum daily exposure time). **DO NOT** exceed the maximum usage times.

### 1.8.2 PPE (Personal Protective Equipment)

Suitable PPE must be worn when using this equipment i.e. Safety Goggles, Gloves, Ear Protection, Dust Mask, and Steel Toe capped footwear (with anti-slip soles for added protection). Wear clothing suitable for the work you are doing. Always protect skin from contact with concrete.

### 1.8.3 Dust


The compaction process can produce dust, which may be hazardous to your health. Always wear a mask that is suited to the type of dust being produced.

## 2. TECHNICAL DATA

### 2.1 Product Features

The future of compaction is here: introducing the Tomahawk Electric Plate Compactor. Extreme power, zero emissions. The new eJXPC20 Electric Plate Compactor combines the old with the new: the same unstoppable force as our gas-powered compactors, without engine emissions for use outdoors and indoors.

### 2.2 Product Dimensions

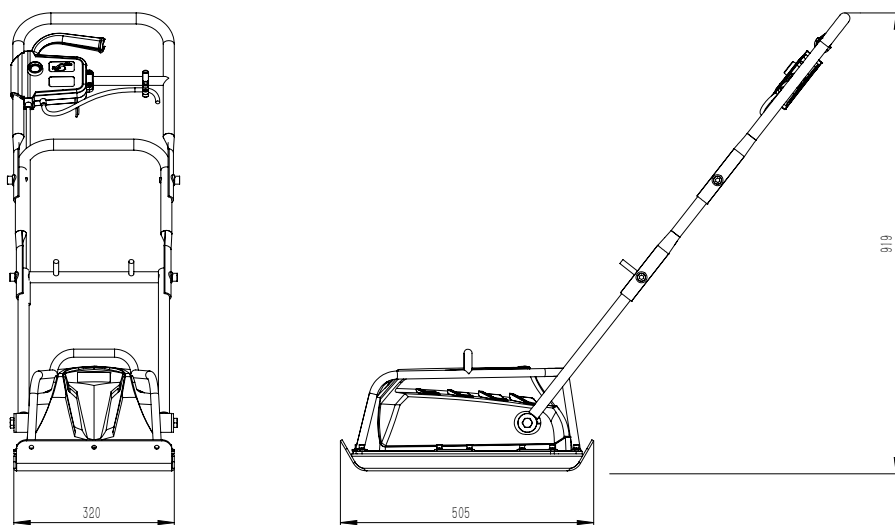


## 2.3 Compactor Specifications

Model	eJXPC20
Motor	120V~60Hz
Power	130W
Motor Speed (rpm)	3450
Input Power Current	14.2
Compaction Force	5kN
Base Plate Dimensions(LxW)	16x13 in.( 40x32 cm)
Cable Length	32 ft (10 m)
Noise	94 dB(A)
Product Weight	62 lbs (28kg)

## 2.4 Product Parts

1. Vibrating Plate
2. Lifting Hook
3. Roll Over Cage
4. Safety Start On\Off Switch
5. Upper Section Handle
6. Middle Section Handle
7. Cable Store

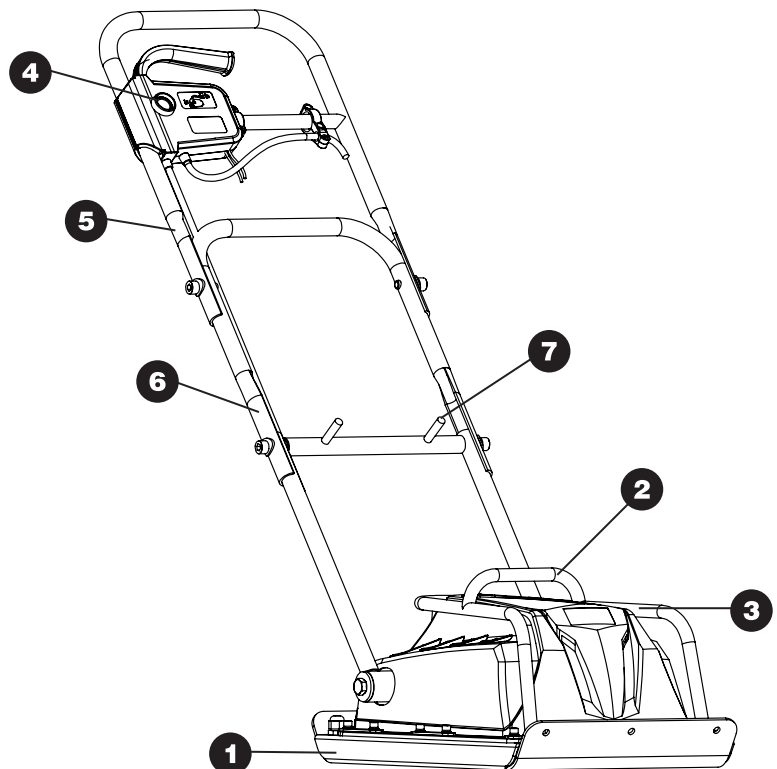

## **3. COMPACTION**

### **3.1 Reasons for Compaction**

Soil, which has been disturbed or new infill, subbase and blacktop, will have small voids or air pockets which, if not compacted, will lead to one or more problems occurring.

**3.1.1** As traffic crosses the surface of an uncompacted area, the material is compressed. This leads to subsidence of the top surface as the material fills the voids.

**3.1.2** A similar situation occurs with static loads on uncompacted ground. The load (e.g. a building) will sink.

**3.1.3** Materials with voids are more susceptible to water seepage, leading to erosion. Water ingress may also cause the soil to expand during freezing temperatures and contract during dry spells. Expansion and contraction is a major cause of damage to building foundations and normally leads to the structure requiring underpinning.

Compaction increases the density of the material and therefore increases its load bearing capacity. Reduces air voids and therefore reduces the risk of subsidence, expansion and contraction, due to ingress of water.

### **3.2 Compaction Specification**

Various methods have been employed in the past to specify the compaction required for various applications. The factors to consider are, material properties, layer thickness, pressure applied, vibration and number of passes. Greater understanding of how compaction works has led to new compaction specifications being introduced.

### **3.3 Applications**

Applications/materials fall into three categories:

**3.3.1** Cohesive materials (less than 20% granular) e.g clay, silt & heavy soils.

**3.3.2** Granular materials (more than 20% granular) e.g hard core, sand & light soils.

**3.3.3** Bituminous materials e.g asphalt (tarmac), cold lay (bitumin emulsion products).

## **4. OPERATION**

### **4.1 Pre Start Checks**

The following pre start-up inspection must be performed before the start of each work session or after every four hours of use, whichever is first. Please refer to the service section for detailed guidance. If any fault is discovered, the eJXPC20 plate compactor must not be used until the fault is rectified.

## 4.2 Operating Instructions

4.2.1 Take the compactor to where it is needed.



**NEVER** pass over the electric cable with the compactor during operation.

4.2.2 **NEVER** leave the motor running whilst transporting or moving the Electric Plate Compactor, even if it is only a short distance.

4.2.3 Having carried out the checks listed in the **Pre Start Checks** section, you may start the motor.

4.2.4 Switch the machine ON and use the control handle to steer or turn the Electric Plate Compactor. This will not only cause the baseplate to vibrate but will also cause it to travel forward. During normal operation you should not have to push the eJXPC20 but allow it to travel at its own pace.

The speed of travel will be determined by the condition of the surface being compacted. If the surface to be compacted is on a slope, great care must be taken when controlling the compactor's direction of travel. If necessary, use a suitable rope attached to the eJXPC20 at a low point on the chassis, to allow a helper to take part of the eJXPC20's weight. Work up and down a slope not across.

4.2.5 Work the eJXPC20 over the surface in an organized pattern until the required compaction has been achieved.

**Where there are a number of different layers to be compacted on top of each other, compact each layer individually.**



**DO NOT** use a Mechanical Hoist on the Hand Lifting Points Transporting the compactor is a 2 person operation. Use the provided Hand Lifting Points.


**NOTE:** eJXPC20 is fitted with a Safety Start 'On/Off' switch. The safety interlock prevents the switch lever from being operated until the safety lock button is depressed.

### 4.3 Starting the Motor

1. Press the safety lock button (A) and pull the switch lever (B) to start the machine.

### 4.4 Stopping the Motor

1. Release the switch lever to switch off the machine.

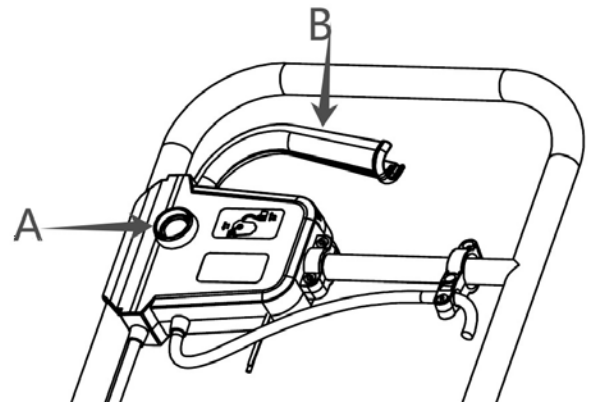

Make sure that the plate is unplugged from the power source prior to carrying out first steps or the visual inspection!

## 5. SERVICE & MAINTENANCE

### 5.1 Maintenance

The Electric Plate Compactor is designed to give many years of trouble free operation. It is recommended that an approved TOMAHAWK POWER dealer or service center carries out all major maintenance and repairs. Always use genuine TOMAHAWK POWER replacement parts, the use of spurious parts may void your warranty. Before any maintenance is carried out on the machine, switch off the motor and disconnect the power supply.

Always set the Electric Plate Compactor on level ground to ensure any fluid levels will be correctly read.

### 5.2 Cleaning

This is an electrical appliance. During cleaning, the electrical components of this machine **MUST NEVER** be exposed to water or liquid of any kind as this could result in serious injury or even death!

Routine Maintenance		Before Each Use	First 4 Hours	First Month /	3 Months / 50 Hours
Cables	Check				
	Replace when necessary				

## 5.4 Maintenance Record

Preventative maintenance and routine service are essential to the long life of your equipment. Reading through this manual thoroughly, you will find that you can do some of the regular maintenance yourself. However, when in need of parts or major service, be sure to see your dealer. For your convenience we have provided this space to record relevant data about your plate compactor.

Invoice Number:		Type of Machine:	
Date Purchased:		Dealer Name:	
Serial Number:		Dealer Phone:	

REPLACEMENT PARTSUSED					MAINTENANCE LOG	
PART NO.	DESCRIPTION	QTY	COST	DATE	DATE	OPERATION

## 5.5 Replacement Parts

For replacement parts and technical questions visit [www.tomahawk-power.com](http://www.tomahawk-power.com) or scan the QR code on the front of this manual.

- Not all equipment components are available for replacement. The illustrations within this manual are a convenient reference to the location and position of parts in the assembly sequence.
- When ordering parts, the following will be required: model number, serial number/lot date code, and description.
- The manufacturer reserves the right to make design changes and/or improvements to product lines and manuals without notice.

## 5.6 Storage

The compactor should be stored on level ground, after the motor and machine have cooled down. Be sure to secure the compactor as necessary to avoid it from falling down.

## 6. TROUBLESHOOTING

Problem	Cause	Solution
<b>Motor fails to start</b>	Fuse or Circuit Breaker tripped	Replace Fuse or reset the breaker
	Stator is shorted or went to ground Motor will make a humming noise and the circuit breaker or fuse will trip	Contact Tomahawk Power
	Motor overloaded or load jammed	Inspect to see that the load is free. If free, Contact Tomahawk Power.
	Capacitor (on single phase motor) may have failed	Contact Tomahawk Power
	Starting switch has failed	Contact Tomahawk Power
<b>Motor runs but dies down</b>	Voltage drop	If voltage is less than 10% of the motor's rating contact power company or check if some other equipment is taking power away from the motor or Contact Tomahawk Power.
	Load increased	Verify the load has not changed. Verify equipment hasn't got tighter. If fan application verify the air low hasn't changed or Contact Tomahawk Power
<b>Motor takes too long to accelerate</b>	Defective capacitor	Contact Tomahawk Power
	Faulty stationary switch	Contact Tomahawk Power
	Bad bearings	Contact Tomahawk Power
	Voltage too low	Make sure that the voltage is within 10% of the motor's nameplate rating. If not, contact power company or check if some other equipment is taking power away from the motor or Contact Tomahawk Power
<b>Motor overload protector continually trips</b>	Load too high	Verify that the load is not jammed. If motor is a replacement, verify that the rating is the same as the old motor. If previous motor was a special design, a stock motor may not be able to duplicate the performance. Remove the load from the motor and check motor doesn't trip.
	Ambient temperature too high	Verify that the motor is getting enough air for proper cooling. Most motors are designed to run in an ambient temperature of less than 40°C. (Note: A properly operating motor may be hot to the touch.)
	Protector may be defective	Contact Tomahawk Power
	Winding shorted or grounded	Contact Tomahawk Power
<b>The motor makes a loud rubbing or grinding noise</b>	Damage to internal workings	Contact Tomahawk Power
<b>Unit will not vibrate</b>	Drive failure	Contact Tomahawk Power
	Vibrator failure	Contact Tomahawk Power
<b>Asphalt adhering to plate Bituminous surface laking (laminating)</b>	Lack of lubrication	Use water
	Over compaction	Remove and relay
<b>Low travel speed (plate sinking)</b>	Layer thickness too deep	Remove some of the material
	Moisture content too high or too low	Remove material and adjust

## 7. EQUIPMENT WARRANTY

Your new TOMAHAWK® equipment is warranted to the original purchaser for a period of one-year (12 months) from the original date of purchase. The TOMAHAWK® warranty is against defects in design, materials and workmanship.

The following are not covered under the warranty:

**7.1.1** Damage caused by abuse, misuse, dropping or other similar damage caused by or as a result of failure to follow assembly, operation or user maintenance instructions.

**7.1.2** Alterations, additions or repairs carried out by persons other than TOMAHAWK® or their recognized agents.

**7.1.3** Transportation or shipment costs to and from TOMAHAWK® or their recognized agents, for repair or assessment against a warranty claim, on any machine.

**7.1.4** Materials and/or labor costs to renew, repair or replace components due to fair wear and tear.

**7.1.5** TOMAHAWK® and/or their recognized agents, directors, employees or insurers will not be held liable for consequential or other damages, losses or expenses in connection with or by reason of or the inability to use the machine for any purpose.

### 7.2 Warranty Claims

Before submitting any warranty claim, you will need to register your new TOMAHAWK® equipment through [www.tomahawk-power.com](http://www.tomahawk-power.com) or email [support@tomahawk-power.com](mailto:support@tomahawk-power.com).

Follow the steps on page 3 or scan this QR codes to complete the equipment registration. After registration is complete, all warranty claims should firstly be directed to TOMAHAWK® through the online Service Request form found at [www.tomahawk-power.com/pages/service-request](http://www.tomahawk-power.com/pages/service-request).



## 8. SERVICES CENTERS

Our service centers are equipped to handle your equipment maintenance and repair needs efficiently. With a network of authorized local service locations, you can find expert support and genuine parts needed to keep your equipment running smoothly. All locations are listed on the webpage <https://tomahawk-power.com/pages/find-a-service-center>.

**For Service Call (866) 577- 4476**

## 9. MORE COMPACTION TIPS

**9.1 Soil Drop Test:** Soil preparedness refers to the “wetness” of the dirt or soil. Soil needs to be 50% dry and 50% wet, before starting compaction. A simple “hand test” can determine this. Pick up a handful of soil with your hand and squeeze the dirt. Observe whether the soil is powdery or if it breaks apart when dropped. If the soil does break apart, it means that it is too dry. If the soil keeps together in one piece when dropped, it is ready for compaction.

**9.2 Soil Testing:** Testing: The function of this step is to measure the density of an aggregate material to ensure the increase of density when driving out air. At a low moisture content level, there are more soil particles assembling together. In order to determine if the soil is compacted properly, there are several methods.

**9.2.1 Soil Testing:** Test strips are useful to determine the method of compaction and understand how many passes of your plate compactor are needed to achieve the optimum compaction. Every layer of compacted soil meets a specific percentage on the proctor curve. Through soil testing, it is possible to identify optimum moisture. Soil testing measures the soil density compared to the degree of compaction specifications, as well as the effect of the moisture.

A common laboratory method called the Proctor Compaction Test can be used to determine the optimal moisture content for a given soil type. The goal of this method is to understand the soil’s maximum dry density. A second method of soil testing is known as the California Test 216 and is used to find the relative compaction of untreated and treated soils.

Four factors account for optimum compaction including lift thickness, pressure, and soil moisture content. During the compaction process, the soil's moisture adds density and lubricates soil particles, until there is a maximum dry unit weight without voids in the soil. The table below explains the different outcomes and properties of fill materials.

Properties of Different Fill Materials			
	Foundation Support	Permeability	Compaction Difficulty
Gravel	Excellent	Very High	Very Easy
Sand	Good	Medium	Easy
Silt	Poor	Medium Low	Somewhat Difficult
Clay	Moderate	None	Very Difficult

## 9.3 Compaction Terms

**9.3.1 Cohesive soils:** Clays and mixes have a particular particle size of less than .003” or .002” and are typically classified as cohesive soils. This type of soil is primarily used for retaining pond beds and mound fills. These soils are dense due to the strongly bound molecular attraction. Cohesive soils and water will not mix easily, but only once the soils are moist it will feel sticky.



**9.3.2 Granular soils:** These soils have particle sizes of .003” or greater, like sand. Water drains easily through the soils particles of granular soils. The larger the particles, the larger the equipment needed to achieve lower frequencies and higher compaction force. Plate compactors are typically the best option for compacting granular soils - however, depending on the vibration frequency and particle size, reversible plate compactors and double drum rollers may be more appropriate for this type of work.



**9.3.3 Mixed soils:** Sometimes soils can be a mixture of both types, cohesive and granular. Thus choosing the appropriate compaction equipment is more difficult. We recommend testing your equipment to match the best machine to the desired job.



**9.4.4 Static Force:** Found in the deadweight of machines, static force applies pressure downward on soil surfaces. As a result, soil particles compress in the topsoil layer.

**9.4.5 Vibratory Force:** This force is engine-driven, creating a downward force, in addition to the machine's static weight. Vibrations compress the soil material closer together to increase density.

**9.4.6 Types of Compaction:** There are four types of compaction that can be applied to soils or asphalt. Each one takes place using one of the two types of the forces explained above (static or vibratory).

**A. Vibration:** Periodic motion of particles with rotating weight in opposite directions from a position of equilibrium.

**B. Impact:** An action of one object coming into contact with another.

**C. Kneading:** Force is applied by alternating movement in adjacent positions.

**D. Pressure:** The process of continuous physical force against solid materials.



# POWER YOUR WORLD

Powered by a superior 7Ah lithium battery with up to **11 hours of life**, spray 6000 ft<sup>2</sup> in 10 minutes or less! Offering **adjustable pressure** from 20 to 70 PSI, Tomahawk Battery Sprayers are perfect for spraying residential and commercial areas!

Item #: eTPS18

## 4.75 GALLON BATTERY BACKPACK SPRAYER

[www.tomahawk-power.com](http://www.tomahawk-power.com)





# POWER YOUR WORLD

Perfect for concrete finishing of warehouses, decks, parking lots, and more, adjust from 0-28 degrees with 4 Combo hardened, tempered steel blades to **achieve a matte, light gloss, or gleaming finish!**



Item #: JXPT46K

**24" - 36" - 46"**  
**POWER TROWELS**

[www.tomahawk-power.com](http://www.tomahawk-power.com) 





# NEVER PUMP NEVER LOSE PRESSURE

Lose the manual pump and gain the power to spray **15,000 ft<sup>2</sup> in 10 minutes** or less while maintaining constant, adjustable pressure from 50-435 PSI with your ideal concrete sealant, cure, top cast, form release, and more!



Item #: TCS6.5

**6.5 GAL MOTORIZED  
CONCRETE SPRAYER**

[www.tomahawk-power.com](http://www.tomahawk-power.com)




# TOMAHAWK

## ELECTRIC PLATE COMPACTOR





MODEL NUMBER: eJXPC20

Parts Manual

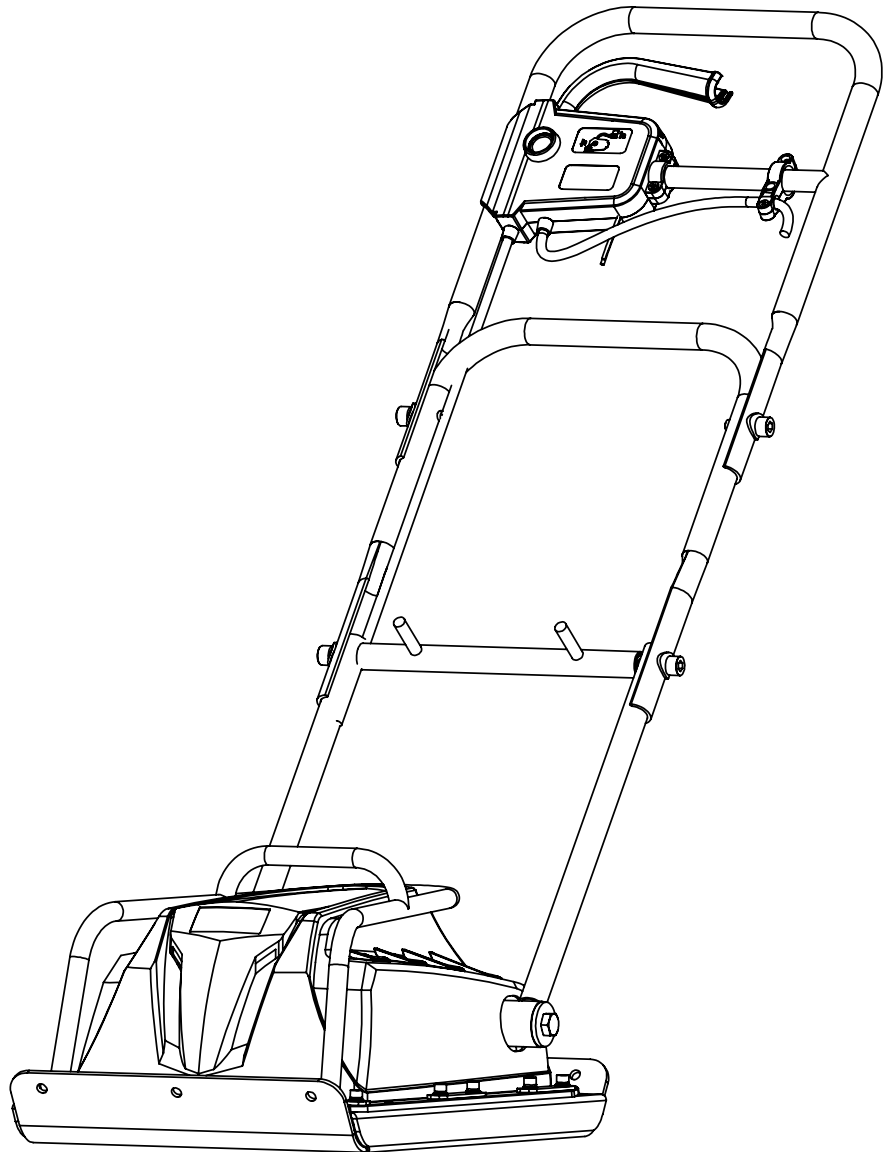

To reduce the risk of injury, the user must read and understand the Operator's Manual before using this product. Save these instructions for future reference.



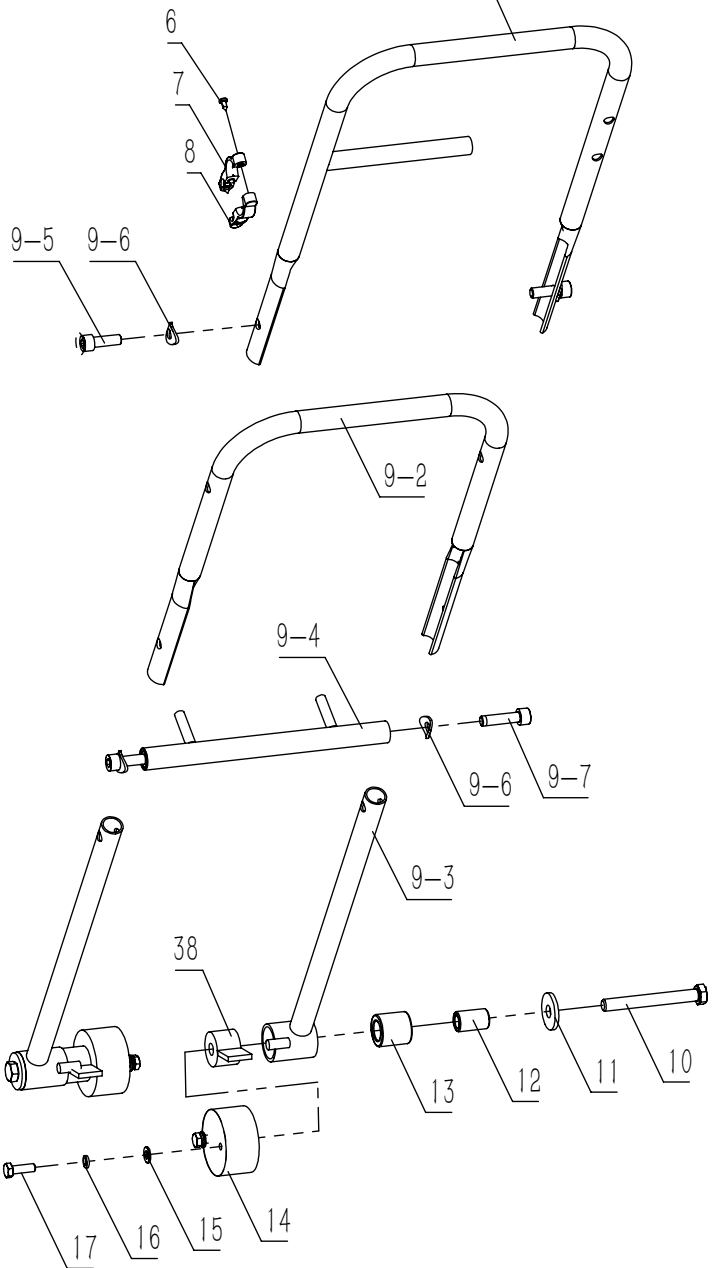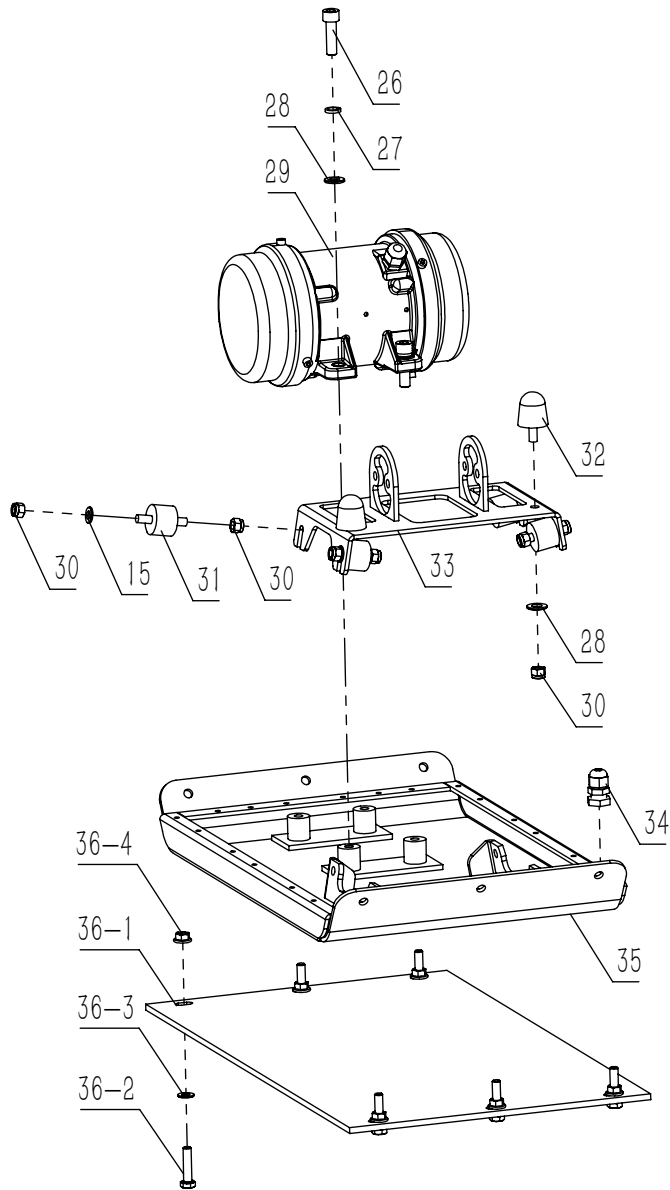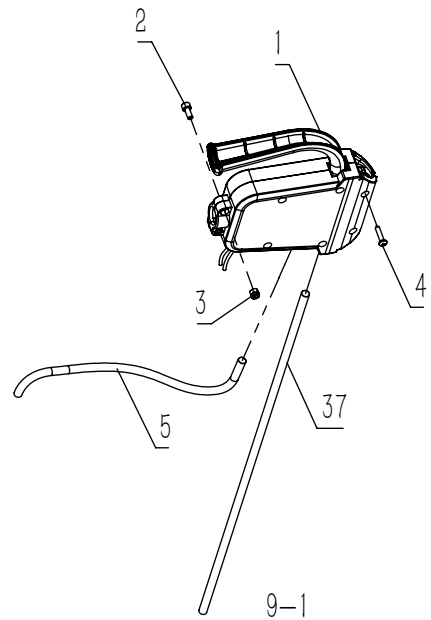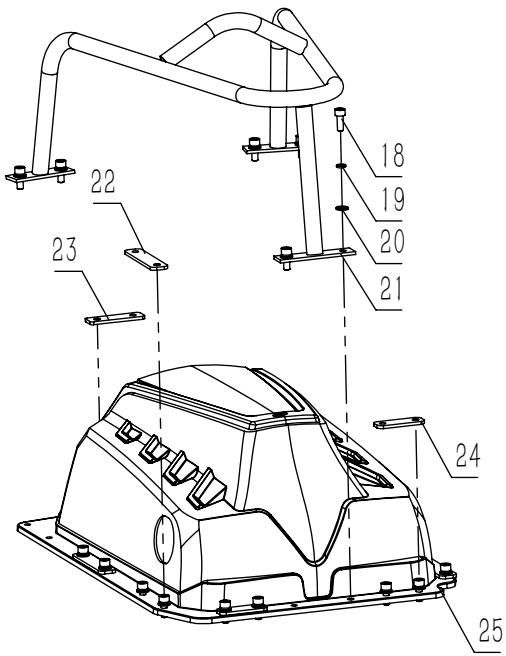

### eJXPC20 Parts List

Item NO.	Description	Part No.	Qty	Item NO.	Description	Part No.	Qty
1	On-off switch assembly	3141804003	1	22	Cover fixing bar Front	3021804003	4
2	Inner socket bolt	4010400005	2	23	Cover fixing bar Side	3021804005	2
3	Lock nut	4020200003	2	24	Cover fixing bar Rear	3021804004	2
4	Crosshead tapping screw	4012200021	6	25	Motor cover	3141804004	1
5	Switch inlet cable	3141804005	1	26	Inner socket bolt	4010400089	4
6	Crosshead tapping screw	4012200017	3	27	Spring washer	4030100006	4
7	Cable cleat,R	3141804006	1	28	Washer	4040100005	6
8	Cable cleat,L	3141804007	1	29	Vibrating motor	3141804002	1
9-1	Handle, upper	3051804009	1	30	Lock nut	4020200005	10
9-2	Handle, middle	3051804004	1	31	Shock absorber, motor	3141004003	4
9-3	Handle, lower	3051804005	2	32	Stopper	3140200017	2
9-4	Handle middle axl	3051804006	1	33	Motor mounting plate	3021804001	1
9-5	Inner socket bolt	4010400084	2	34	Cable connector	3141402050	1
9-6	Washer	4040900001	4	35	Base plate	3021804002	1
9-7	Inner socket bolt	4010400090	2	36	Paver stone mat	3141804999	1
10	Inner socket bolt, half thread	4010200094	2		26Kg	3141804021	1
11	Washer	4041000001	2	36-1	Paver stone mat	3141804022	1
12	Bush	3140000002	2	36-2	Bolt	4010100038	6
13	Rubber collar	3140000003	2	36-3	Washer	4040100004	6
14	Shock absorber, Handle	3140000100	2	36-4	Nut	4020300003	6
15	Washer	4040100004	8	37	Power cable	3141801023	1
16	Spring washer	4030100005	4	38	Handle adapter	3011804001	2
17	Hex head bolt	4010100032	4				
18	Inner socket bolt	4010400016	22				
19	Spring washer	4030100004	22				
20	Washer	4040100003	22				
21	Frame cage	3051804007	1				

# TOMAHAWK

## Equipment Guide

### COMPACTION



Wheel Kit Available

#### Rammers

Part#:	*Battery Powered Option Available
<b>TR68H</b>	3,550 lbs/sq ft, Honda GX120
<b>JX60H</b>	3,350 lbs/sq ft, Honda GX100
<b>eJX60H</b>	3,350 lbs/sq ft, Honda GXE2.0S



Wheel Kit Available

#### Forward Plate Compactors

Part#:	*Battery Powered Option Available
<b>TPC80H</b>	3,000 lbs/sq ft, Honda, 21"x17" Plate
<b>TPC85H</b>	3,200 lbs/sq ft, Honda, 23"x17" Plate
<b>TPC90H</b>	3,400 lbs/sq ft, Honda, 22"x20" Plate



#### Reverse Plate Compactors

Part#:	
<b>TPC100H</b>	3,500 lbs/sq ft, Honda, 19"x14" Plate
<b>TPC170H</b>	7,000 lbs/sq ft, Honda, 28"x20" Plate
<b>TPC400H</b>	11,690 lbs/sq ft, Honda, 32"x22" Plate

### CONCRETE



#### Power Screeds

Part#:	*Battery Powered Option Available
<b>TVSA-H</b>	6-16 ft Magnesium Blades Honda GX35, Adjustable Handles
<b>eTVSA</b>	6-16 ft Magnesium Blades 36V/5 Ah Battery, Adjustable Handles



#### Concrete Sprayers

Part#:	<b>TCS6.5</b> Adjustable from 0-450 PSI
	Handles 30% + Solids, 1.8 HP 2 Stroke Motor, 24" Brass Wand 0.5 GPM, Fan Nozzle Included, Spray 15,000 ft <sup>2</sup> in 10 Minutes



#### Early Entry Saws

Part#:	
<b>TFS6H</b>	6" Blade Diameter, Blade Compatibility, Honda GX120
<b>TFS10H</b>	10" Blade Diameter, Self Propelled, Blade Compatibility, Honda GX270/GX390

### TROWELS



#### Porta-Trowels

Part#:	<b>JXPT30T</b> Lightweight at 40 lbs
	Adjustable 18 ft Extension Bull Float Poles 30" Diameter, 4-Blade Assembly Adjustable Blade Pitch from 0-28°



#### Walk Behind Trowels

Part#:	Items Listed Includes Combo Blades
<b>TPT24H</b>	2 ft Edger, Honda GX160, 0-28° Blade Pitch
<b>TPT36H</b>	3 ft, Honda GX160/GX270, 0-28° Blade Pitch
<b>TPT46H</b>	4 ft, Honda GX270/GX390, 0-28° Blade Pitch



#### Ride on Trowels

Part#:	
<b>TRT46V</b>	8 ft Hydraulic Steer, 35 HP Vanguard, CVT Clutch, 180 RPM
<b>TRT60V</b>	10 ft Full Hydrostatic, 74 HP Hatz Diesel

HAVE QUESTIONS?

Contact us. *We're here to help!*

(866) 577-4476

Email us at [sales@tomahawk-power.com](mailto:sales@tomahawk-power.com)



# TOMAHAWK

## Equipment Guide

### GENERATORS

QUIET INVERTER SERIES



58 db

### 2,000 - 3,300 Watt Series

<b>TG2000i</b>	2,200w Max / 2,000w Rated
<b>TG3000i</b>	3,300w Max / 3,000w Rated, 120/220V, 30 AMP Twist Lock Run Time 8 Hrs @ 50% Load CARB Compliant, GFCI 120v

QUIET INVERTER SERIES



EFI  
OPTION AVAILABLE

62 db

### 4,500 - 5,500 Watt Series

<b>TG4500i</b>	4,500w Max / 3,800w Rated
<b>TG5500i</b>	5,500w Max / 5,000w Rated, 120/220V Run Time 8 Hrs @ 50% Load CARB Compliant, GFCI

QUIET INVERTER SERIES



62 db

### 10,500 Watt Series

<b>TG9000i</b>	10,500w Max / 8,500w Rated Voltage Selector, 120/220V Run Time 14.5hrs @ 25% Load CARB Compliant, GFCI, CO Detector
----------------	--

### FLOORING

Assorted Blade Choices



### Grinders and Scrapers

<b>Part#:</b>	
<b>TGDR10</b>	10" Disc, 120V, 1/32" Per Pass, 11 AMP, 1.5 HP, 1,725 RPM
<b>TSCP8</b>	8" Blade, 120V, 11 AMP, 3/4 HP, 1,725 RPM, Carpet & Tile Remover

Assorted Blade Choices



HONDA  
ENGINES

### Concrete Scarifier

<b>Part#:</b>	<b>TSCAR-8H</b>	*Battery Powered Option Available
Honda GX160 Engine, Scarifies 350 - 500ft <sup>2</sup> /hr OSHA Compliant Vacuum Port 8" Carbide Tungsten Drum Kit, 1/8" Per Pass		

Assorted Brush Choices



### Floor Sweepers

<b>Part#:</b>	*Battery Powered Option Available
<b>TOS38</b>	38" Working Width, Triple Broom System, 14.5 Gallon
<b>eTOS30</b>	30" Working Width, Battery Powered Triple Broom System, 13.5 Gallon

### OUTDOOR POWER

HONDA  
ENGINES



### Trash Water Pumps

<b>Part#:</b>	
<b>TW3H</b>	3" Pump, Honda GX270, 375 GPM, Elevation: 89ft, Suction: 25ft
<b>TW4H</b>	4" Pump, Honda GX390, 581 GPM, Elevation: 92ft, Suction: 26ft



### Power Buggy

<b>Part#:</b>	<b>TBUGGY300e</b>	48V-20Ah Battery
Handles up to 8 cu ft or 660 lbs. Bucket Capacity Hydraulic Bucket with 92° Tilt, 8 Hour Run Time Snow Plow Attachment & Bucket Extender Available		

HONDA  
ENGINES



### Welder Generators

<b>Part#:</b>	6010-7024 Rods Compatible	
<b>TWG120A</b>	120 Amp Welder, 60% Duty Cycle, 2000w, Includes Wheel Kit	
<b>TWG210A</b>	210 Amp Welder, 60% Duty Cycle, 2000w, Includes Wheel Kit	

72 db

ASSEMBLED IN THE  
**USA**  
PARTS SOURCED GLOBALLY

(866) 577-4476

www.tomahawk-power.com



## Power Your World

Tomahawk understands to keep a job-site running smoothly the proper equipment and spare parts are needed at the drop of a hat. With same day shipping and faster delivery times, count on Tomahawk to keep you powered throughout the day! With long lasting parts and engines, Tomahawk equipment will be the star of your fleet for years to come. Visit [www.tomahawk-power.com](http://www.tomahawk-power.com) to get started today!

# TOMAHAWK

Tomahawk Power, LLC  
San Diego, CA

### Sales Support

(866) 577-4476

[sales@tomahawk-power.com](mailto:sales@tomahawk-power.com)

### Equipment Support

(866) 577-4476

[support@tomahawk-power.com](mailto:support@tomahawk-power.com)

[www.tomahawk-power.com](http://www.tomahawk-power.com)



### FACEBOOK

[facebook.com/TomahawkPowerUSA](https://facebook.com/TomahawkPowerUSA)

### YOUTUBE

[youtube.com/TomahawkPower](https://youtube.com/TomahawkPower)

### INSTAGRAM

[@tomahawkpower](https://instagram.com/tomahawkpower)