


Gazebo embedded control panel

ZC101

Instructions for use



PRODUCT ILLUSTRATION

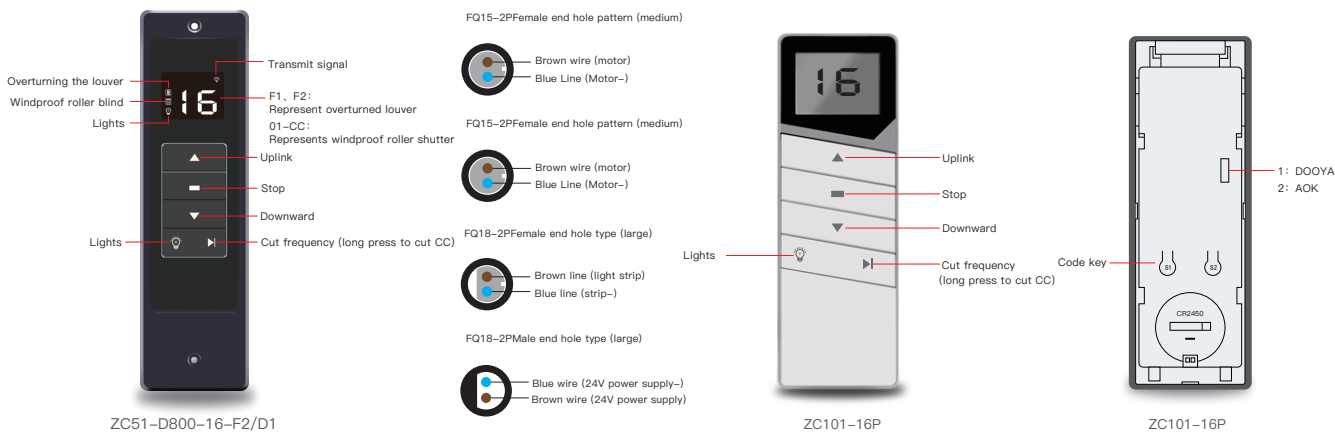


PRODUCT PARAMETERS

Model	Number of channels	Input voltage	Motor output*2	LED lamp output	Working temperature	Product size
ZC51-D800-16-F2/D1	16	DC24V±10%	DC24V/36W	DC24V/352W	-20°C~75°C	20*5.5*5.5CM
Model	Number of channels		Battery Type	Transmit power	Working temperature	Product size
ZC101	16		CR2450 (3V)	≤10MW	-20°C~55°C	135*40*8MM


Note: The above parameter information is for reference only. The actual site shall prevail. If you have any technical questions, please consult Zhihu Qiju Co., Ltd.

APPLICATION MODE

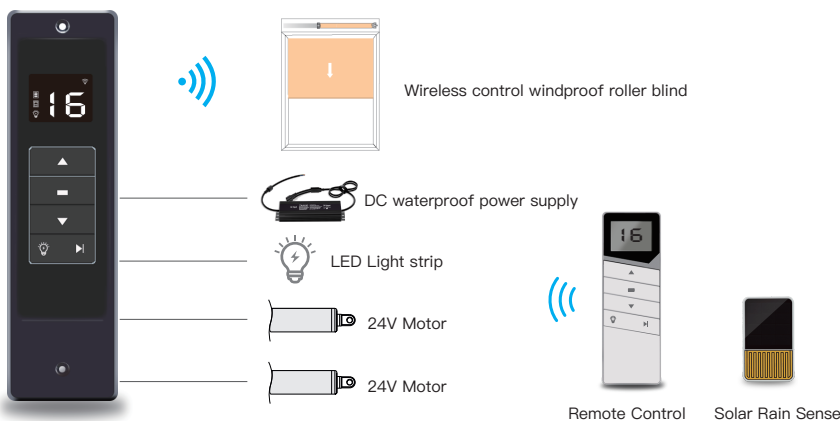


Remote control code


(The remote controller needs to dial the code to select the manufacturer, and then switch the frequency to the CC code before the receiver can forward and control the roller shutter.)

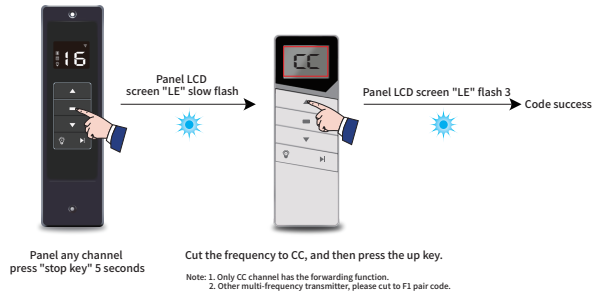


Windproof roller shutter pair code

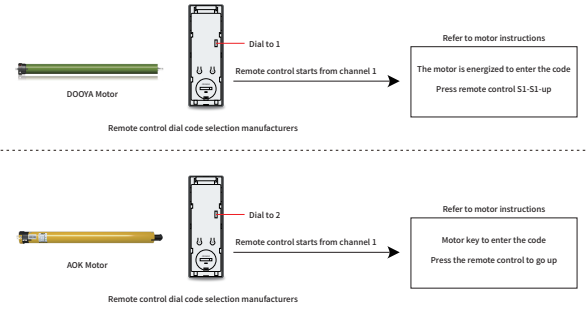


Rain sense and controller pair code (Rain sense only controls overturning louver)

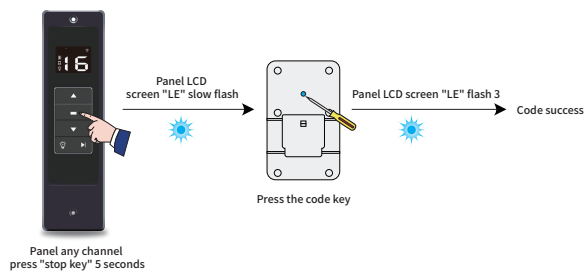


Shutter motor commutation

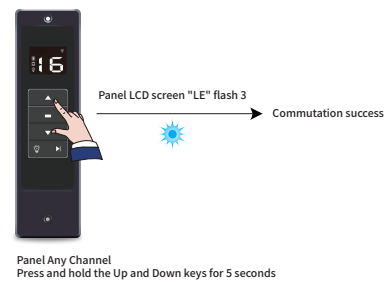


Delete code

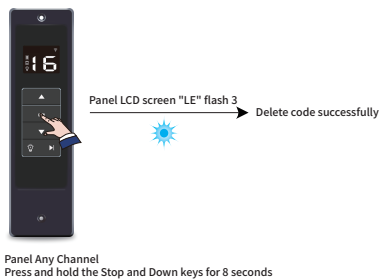

Lock Channel

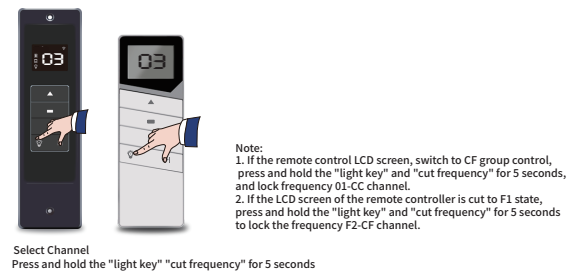

Solution Channel

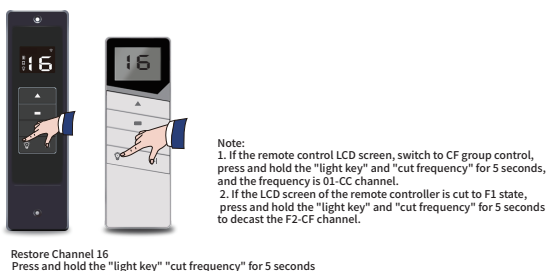

FCC Statement

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.