



Safer Driving, Better Life

Warranty Certificate

To protect your rights, please scan the QR code to activate the electronic warranty card for your product!

Activate 2-year Warranty and get a FREE GIFT



WWW.LED-AUTOLIGHT.COM



SCAN THE QR CODE



>>> TO KNOW MORE

CO LIGHT official website is a community for you to connect with us. Here you can share your shopping experiences, get advice and inspiration, and discover new exciting products!

*Want to get exclusive deals and discounts?
Come and follow us for more deals and discounts!*

Caution

1. Compatible with all automobile boats and devices equipped with a 12V DC power source.
2. Make sure all wiring is away from moving parts.
3. Do not all wiring near anything flammable after being used.
4. After installing lights, make sure to position lamps and avoid dazzling.
5. Lighting laws and regulations vary by state. Check your local laws before using.

Our Service

All products are under quality warranty for normal usage within 2 YEARS since the purchasing date.

During use, if you have any questions, please find your Amazon order and contact us in time. We provide 24 hours service.

You can contact us at this email address:
colight_service@163.com




UTV Side Mirror with Lights Installation Manual



*THANK YOU
for choosing CO LIGHT*

Parts List

a:Side Mirror Light
f:Hexagonal Spanners
b~e:Psrts of brackets
g:Wiring Harness

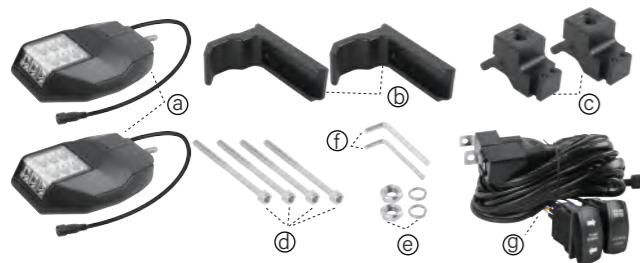

Mounting The Brackets



1.75 ~ 2inch tube



- Put the non-slip rubber on the roll bar.
- Loosen the bracket, adjust the appropriate width to clip it onto the cage.
- Tighten the two long screws.

Mounting The Mirror




- Put the nut and spacer into the screw of the ball joint
- Turn the screw of the ball joint into the screw hole of the bracket, and then tighten the nut

Adjusting The Mirror



- Loosen the screw on the side of the ball joint.
- Tighten the screw after adjusting to the desired angle.

Wiring Harness Arrangement

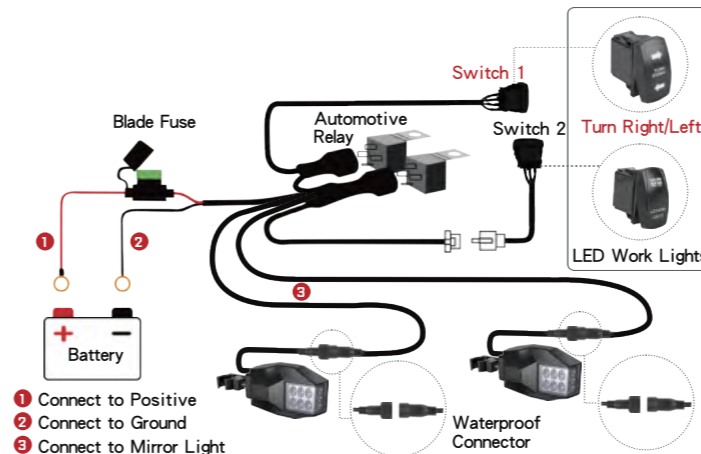

- Pass the wiring harness through the firewall and leave part of the switch segment in the vehicle.
- Pull it through the rubber cable ring and install it somewhere near the battery so that the power and ground cables can be connected.
- Install the fusing relay, plug the fuse, and install the red positive cable directly into the battery or 12-volt circuit.
- Install the negative cable and attach it to the body ground or battery.

Need help?

Scan it get more support



24 Months Warranty



Exchange /Return Free

Find your order, contact with us.
We believe that No problem can't be solved by communication.

1. One of the light can't work:

- Please try to swap the position of the 2 light, if it work, pls check the wires connection.
- If it also can't work, take the picture and let us replace you a new mirror light.

2. Can't mount the brackets?

- If your UTV is a profit roll cage, please search for CO LIGHT mirror light with profit bracket on Amazon.
- If the diameter of your roll bar is less than 1.75inch, you can add a rubber pad to fit it.
- If the diameter of your roll bar is larger than 2inch, you can replace the non-slip rubber with a thinner one.