


HOW TO INSTALL

Please see below installation photo.

1. Take out product and accessories from package, double check all the accessories inside the package.
2. Open the battery compartment on the back of timer and follow the marks to place 2 AA alkaline batteries.
3. Place the black O-ring inside the orange hose tap connector.

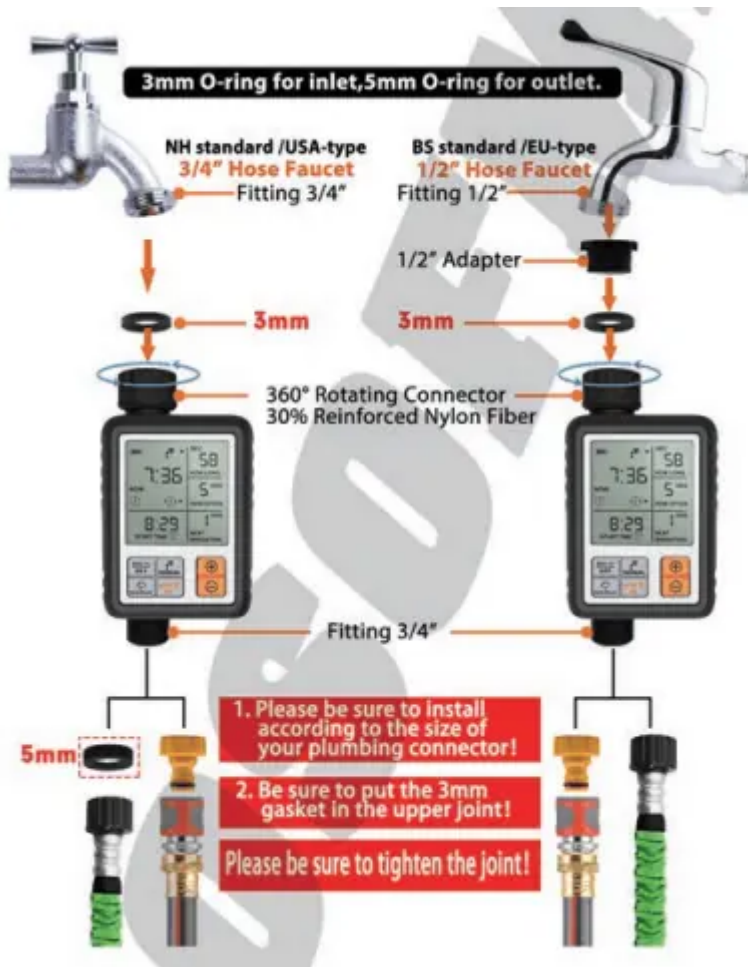

How to Setup

|

Warm Tips

- Please make sure a rubber ring is well set before connecting the quick connector to top tap connector to prevent water leakage.

- When the power is low, please replace the batteries in time to avoid the interruption of the normal operation; when replacing the batteries, please make sure that the battery compartment is dry.
- The Product itself does not generate pressure, but the pressure of tap water is used; tap water or a pressurized water source ensures a normal effluent from the irrigation timer.
(Withstands maximum water pressure : 10KG)
- Mesh filter prevents dirt particles, prolonging life of the product
- Please make sure the rubber ring is well set in the black connector to avoid water leakage. If you find this timer leak water, pls contact customer service.

How to contact

Email: service@crosfmihome.com

Warning

This content is compiled from multiple sources and is provided for reference purposes only. It may not be complete or fully applicable to all situations. If you are unable to resolve your issue, please contact the product manufacturer or an authorized service provider for official support.

Document generated by [ManualsFile](#)