

## User manual Docking Station

### PACKAGE CONTENTS

- Dual Hard Drive Docking Station
- Power adapter (12V/3A)
- USB 3.0 cable (USB 3.0 Type B to USB 3.0 Type A)
- Quick Setup Guide

**Note:** The USB 3.0 OUT port cannot be used to connect a computer.

### SYSTEM REQUIREMENTS

- Windows OS: Windows® 10, Windows® 8.1, Windows® 8, Windows®7
- Linux Kernel: Linux 2.4.1 and later versions
- Mac OS: Mac OS X 10.6 and later versions


### FEATURES

- Fashionable design provides remarkable performance
- Supports all 2.5" & 3.5" SATA I/II/III hard drives
- Maximum capacity of each bay is up to 8 TB
- Plug and play, no drivers needed
- Supports SATA and USB 3.0 transfer speed up to 5 Gbps
- LED indicator lets you check working status
- Supports MTT (Multiple Transaction Translator)
- Reads two discs (SSD and HDD) simultaneously.

#### Front view



Back panel view

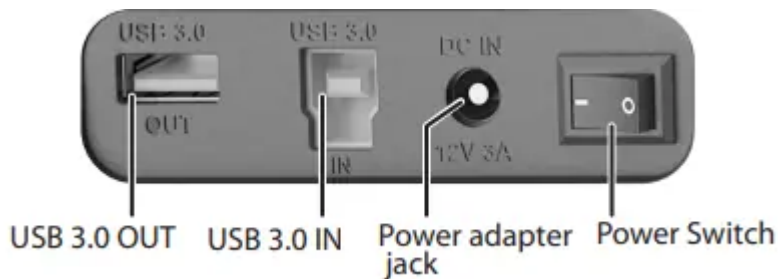

## HARD DRIVE DOCKING STATION

### Hard Disk:

1. Insert an SSD or HDD into a slot on your docking station. You can use both slots at the same time. CAUTION: To avoid damaging the equipment, make sure that the SSD/HDD is inserted in the correct direction.
2. Connect the USB cable to the USB 3.0 IN jack on the docking station and to an available USB port on your computer.
3. Connect the power adapter to the DC IN jack on the back of your docking station, then turn on your docking station and the computer. The docking station LED blinks until the computer identifies your station, then the LED lights steady.
4. If this is the first time you are using an SSD or HDD, follow your computer's operating system instructions to format the disk.
5. Follow your computer's operating system instructions to transfer data to or from your computer. The docking station LED blinks while data is transferring.
6. When the transfer is complete, turn off power to the docking station by pressing the power switch. Press the eject button on the side of your docking station, then remove the SSD or HDD.

## USB Devices:

You can use the USB 3.0 OUT port to connect USB devices. This jack provides two-way transmission between the USB device and an HDD, an SSD, or a computer.

## SPECIFICATION:

Transmission Port:	USB 3.0 Type B for computer. USB 3.0 Type A for other USB devices
Transmission Rate:	5 Gbps (MAX)
Work Temperature:	32°F ~ 122°F (0°C ~ 50°C)
Work Humidity:	20% RH~ 85% RH
Dimension:	6.0 × 5.3 × 2.7 in. (152 × 134 × 68 mm)

### Warning

This content is compiled from multiple sources and is provided for reference purposes only. It may not be complete or fully applicable to all situations. If you are unable to resolve your issue, please contact the product manufacturer or an authorized service provider for official support.