



SILVERSTONE®
Designing Inspiration

MLOI

Milo Series


MANUAL




MLOI

Specification: Material: Aluminum front panel, 0.8mm SECC body
Color: Black & Silver
Model: ML01B(Black) , ML01S(Silver)
ML01B-R(Black, card reader) , ML01S-R(Silver, card reader)
Motherboard: Micro ATX
Drive Bay: External - 5.25" x 1
External - 3.5" x 1
Internal - 3.5" x 1
Cooling System: Front - 80 x 15mm intake, 1800rpm, 19CFM, 20.65dBA
Left side - Dedicated CPU vent
Top side - Oversized mesh grille over CPU area
Expansion Slot: 4 x low profile
Front I/O Port: USB2.0 x 1, IEEE1394 x 1, audio x 1, MIC x 1
Card reader format (ML01R only): MMC, SD, MD, CF, MS, SM, XD, MS PRO,
MS PRO DUO, MS DUO, MINI SD, RS MMC
Power Supply: TFX 300W PFC
Net Weight: 5 kg
Dimension: 330mm (W) x 98mm (H) x 423mm (D)


Disassemble Chart

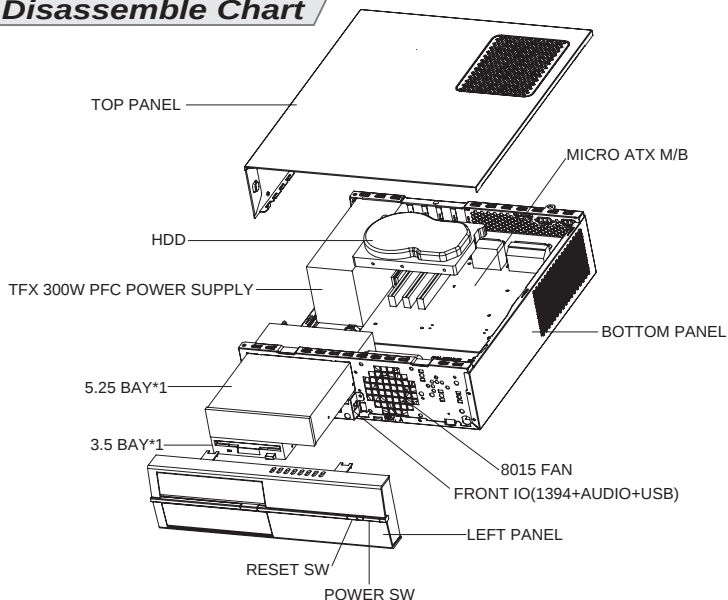


This is a unique product, please read the following detailed installation guide we have prepared meticulously for you.

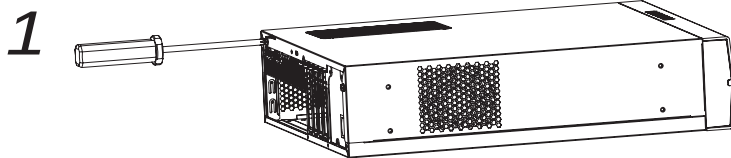


Use a screw driver to loosen two #6-32*6 screws on back side of the top panel.

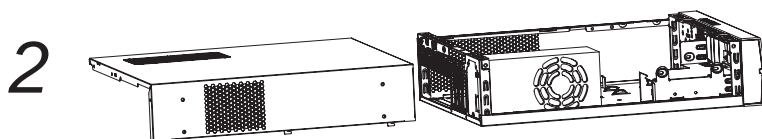

Remove the top panel.

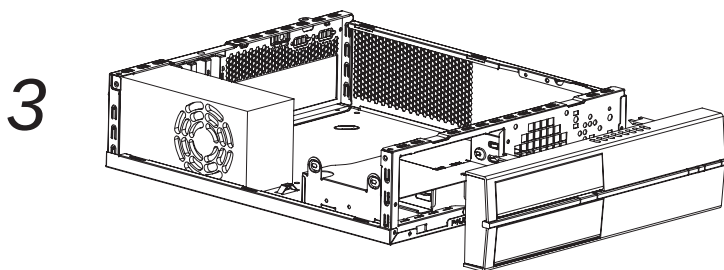


Lift the two latch hooks to remove the front panel.

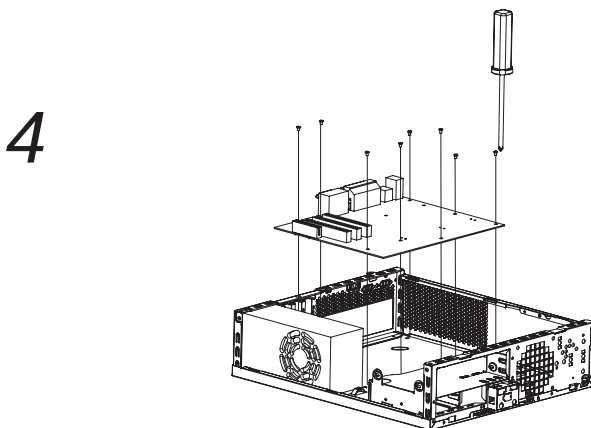


Use the eight pieces of #6-32*4 screws in the accessory packet, screw the mother board on to the case as pictured.

5

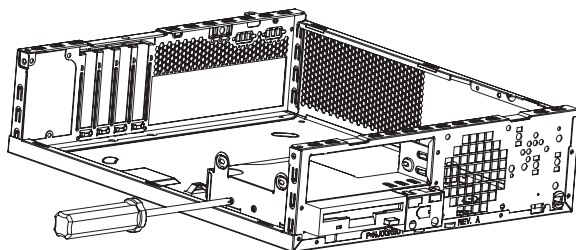


Take out two pieces of M3*4 screws, and secure the external 3.5" device as pictured.

6

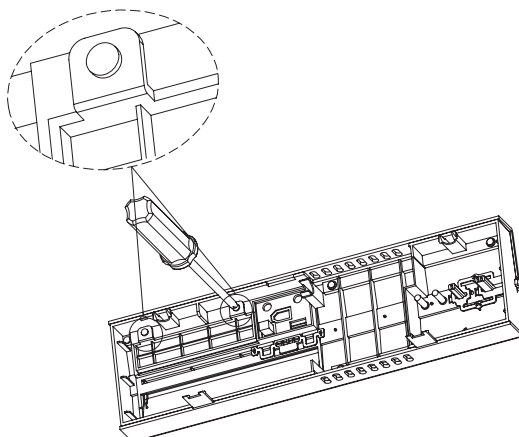


Take out the external 3.5" drive bay cover from the front panel.

7

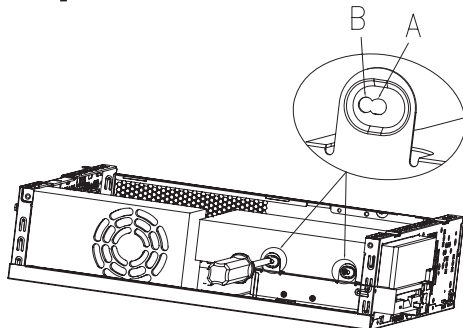


From the accessory packet, take out two pieces of M3*4 screws and screw the optical drive into place as pictured. If optical drive cover on the front panel touches the optical drive and prevents the front panel from installing properly, use pre-drilled hole B to secure the optical drive instead, then use of a rubber filler is then required as pictured.

8

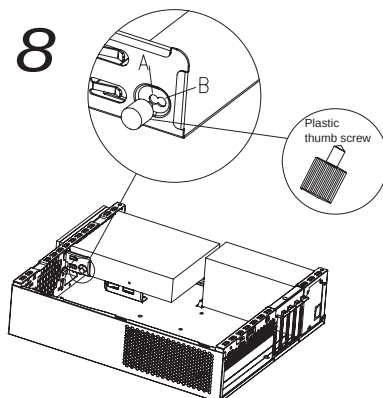


Take out a thumb screw from the accessory packet and secure the optical drive into place as pictured.

9

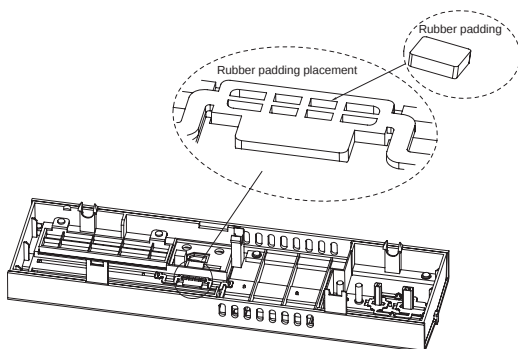


Take out the rubber padding and stick it right behind the optical drive buttons on the front panel.

10

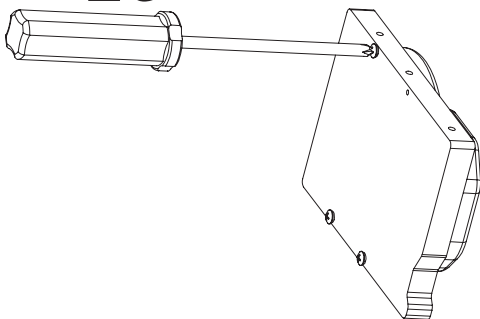


Take out the three special hard-drive screws provided in accessory packet (refer to photo), tighten those screws into Hard Disk Drive as pictured.

11

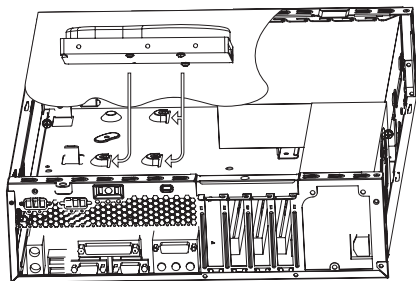


Place the Hard Disk Drive into the case according to the picture.

12

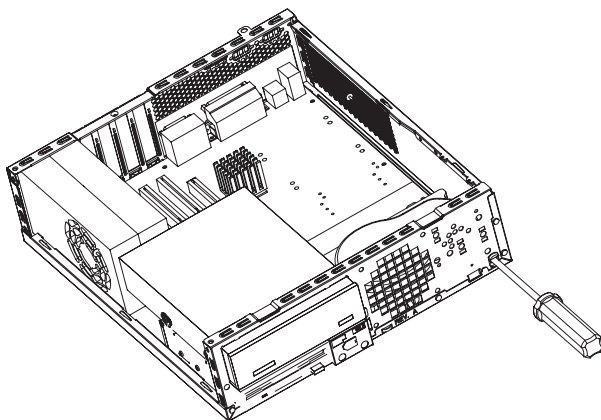


Take out one piece of M3*6 screw, use a screw driver to secure Hard Disk Drive into place as pictured.

13

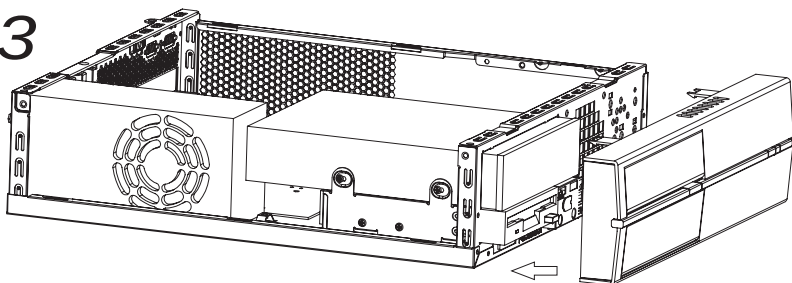


Place front panel back on the case and make sure it snaps into the latch hooks.

14

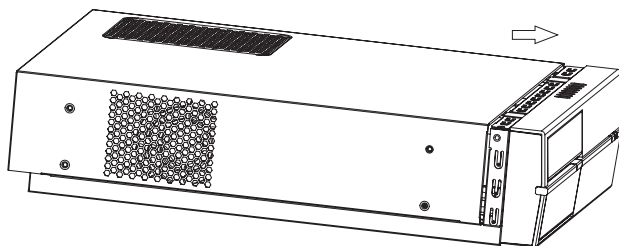


Put the top panel back on the case as pictured.

15

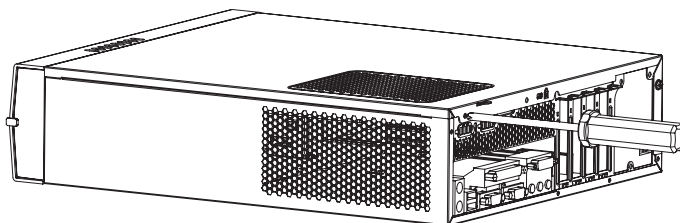

Make sure the top panel is securely fastened.

16

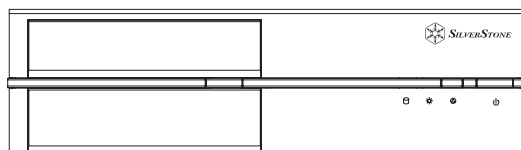


Installation complete!

Warranty Information

During the warranty period, assistance for replacement or exchange of defective components is available at the place of purchase. Please bring your receipt and warranty certificate for the proof of purchase. The warranty does not cover repair or exchange of the product resulting from misuse, accident, modification, unsuitable physical or operating environment, improper maintenance by you, or failure caused by a product for which SilverStone is not responsible for. The warranty is voided by removal or alteration of product or parts identification labels.

Warranty Period - 1 year from the date of purchase.

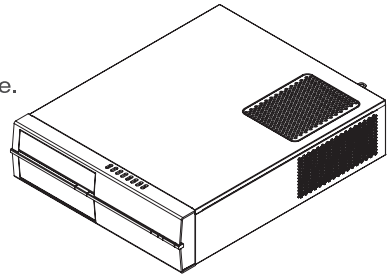

This instruction will help you to make the most out of your PC enclosure. Please read through it before installation. Also, please keep your PC enclosure receipt and this instruction in safe place for the future reference.

We, SilverStone Technology, hope you will enjoy our product. If you have any comment or suggestion, please email to support@silverstonetek.com Thank you for choosing and supporting our product.

To be valid, this sheet must be filled out by
your salesperson at the time of purchase.

Store :

Purchaser :

Purchase date :

Model No. :

Serial No. :

SilverStone Technology Co., Ltd.

www.silverstonetek.com

support@silverstonetek.com

Issue date: June , 2006

NO:G11400284