

JWM-Cloud Software

Quick Start Guide

WM-5000ES

A guard tour system





Welcome to JWM-Cloud Patrol!
This short guide will help you configure all basic settings needed to setup your JWM-Patrol account for first time and learn about all the necessary steps in order to quickly manage patrols.



1 Login

Launching

<http://www.jwmyun.com>

Inputting the Company Name , Username and the Password of the user. Then login in the software.

The Best Way to Control Your Patrol
100% satisfaction 100% trust

Guard Patrol System

1296

Remember Password




If you want to make a Demo use of JWM- Cloud Patrol system, you can contact JWM and get a demo user for testing freely.



2 Download Driver

Before patrolling, the first step is download the driver for the device .

The driver is very important that makes the reader connect smoothly.

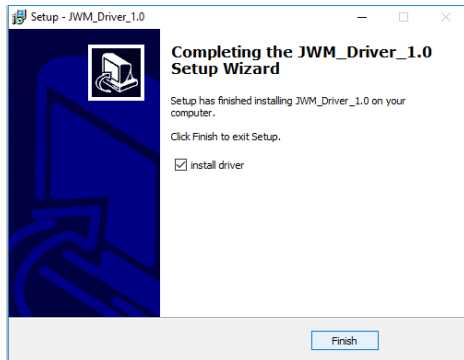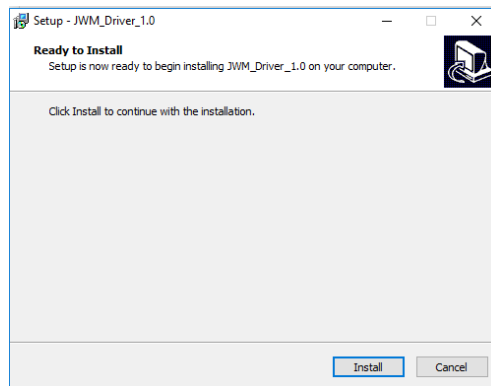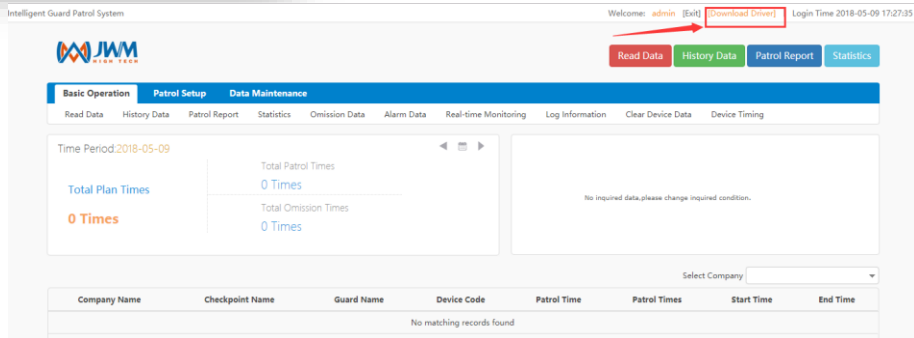


Install the driver on your computer.

Note: If you have encountered anti-virus software interception, please install the software at ease.

3 Register Device

You need to register the device on the cloud software first.

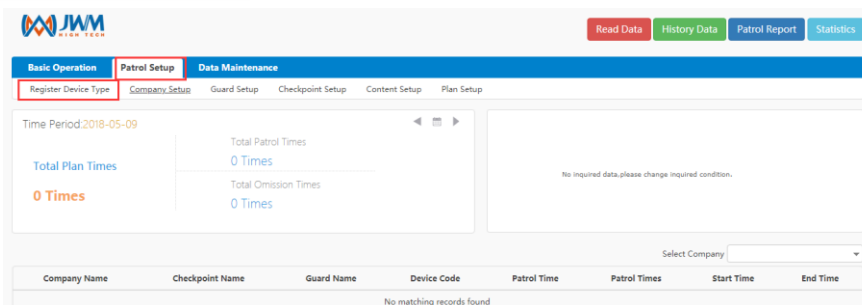

Click "Register Device" to register device on cloud software.



Registered Device List

| <input type="checkbox"/> | Device Type |
|--------------------------|-------------|
| <input type="checkbox"/> | 5000V5 |
| <input type="checkbox"/> | 5000V4S |
| <input type="checkbox"/> | 5000ES |

Close Delete Device Register Device

Note: Please click "Register Device" first and then connect the device to PC

4 Activate Device

Read Data History Data Patrol Report Statistics

Basic Operation Patrol Setup Data Maintenance

System Initialization Device List System Parameter Setup Device Parameter Setup Communication Parameter Setup Alarm Clock Setup Permission Setup Operator Setup

Modify Password

+ Add Device \$ Activate Device - Delete Device Replace Device Return Home

| Device Code | Registration Time | Start Time | End Time |
|---------------|---------------------|------------|------------|
| 0004-12345678 | 2018-05-08 17:39:53 | 2018-05-08 | 2018-05-08 |

Selected the device ,and then click "Activate Device"

Read Data History Data Patrol Report Statistics


Basic Operation Patrol Setup Data Maintenance

System Initialization Device List System Parameter Setup Device Parameter Setup Communication Parameter Setup Alarm Clock Setup Permission Setup Operator Setup

Modify Password

+ Add Device \$ Activate Device - Delete Device Replace Device Return Home

| Device Code | Registration Time | Start Time | End Time |
|---|---------------------|------------|------------|
| <input checked="" type="checkbox"/> 0004-12345678 | 2018-05-08 17:39:53 | 2018-05-08 | 2018-05-08 |

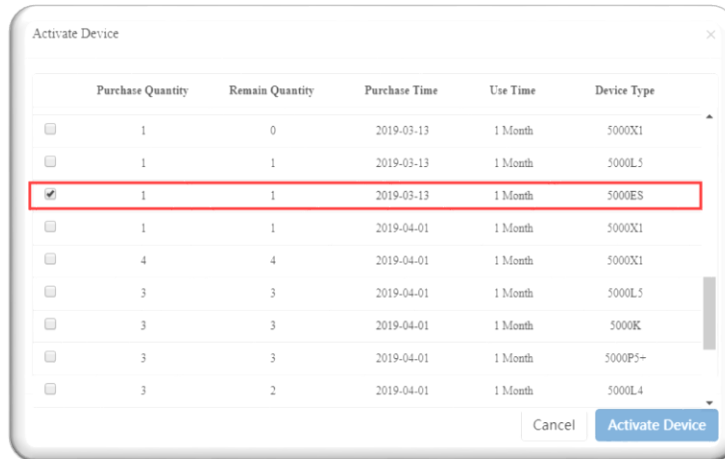

| | Purchase Quantity | Remain Quantity | Purchase Time | Use Time | Device Type |
|-------------------------------------|-------------------|-----------------|---------------|----------|-------------|
| <input type="checkbox"/> | 1 | 0 | 2019-03-13 | 1 Month | 5000X1 |
| <input type="checkbox"/> | 1 | 1 | 2019-03-13 | 1 Month | 5000L5 |
| <input checked="" type="checkbox"/> | 1 | 1 | 2019-03-13 | 1 Month | 5000ES |
| <input type="checkbox"/> | 1 | 1 | 2019-04-01 | 1 Month | 5000X1 |
| <input type="checkbox"/> | 4 | 4 | 2019-04-01 | 1 Month | 5000X1 |
| <input type="checkbox"/> | 3 | 3 | 2019-04-01 | 1 Month | 5000L5 |
| <input type="checkbox"/> | 3 | 3 | 2019-04-01 | 1 Month | 5000K |
| <input type="checkbox"/> | 3 | 3 | 2019-04-01 | 1 Month | 5000P5- |
| <input type="checkbox"/> | 3 | 2 | 2019-04-01 | 1 Month | 5000L4 |

Buttons: Cancel, Activate Device


It will show the detailed purchasing information of device. And then click “Activate Device”

Noted: Please don't delete the device which have been activated. Once you delete it, the activate license could not be used again.


5 Company Setup

You need to add a new company for bind of the checkpoints with the security guards.

Click “Add Company” to create a new company.

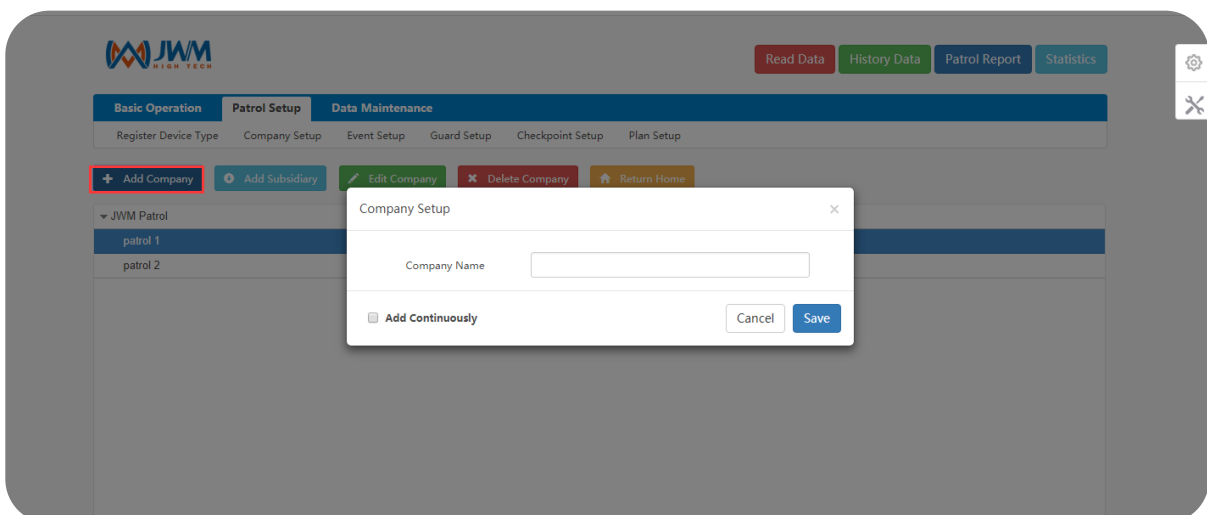


The screenshot shows the JWM Patrol software interface. The main menu includes 'Basic Operation', 'Patrol Setup', and 'Data Maintenance'. Under 'Patrol Setup', there are options for 'Register Device Type', 'Company Setup', 'Event Setup', 'Guard Setup', 'Checkpoint Setup', and 'Plan Setup'. The 'Add Company' button is highlighted in red. A 'Company Setup' dialog box is open, featuring a 'Company Name' input field, an 'Add Continuously' checkbox, and 'Cancel' and 'Save' buttons.




And you also can add subsidiary or department below the company.

6 Checkpoint Setup

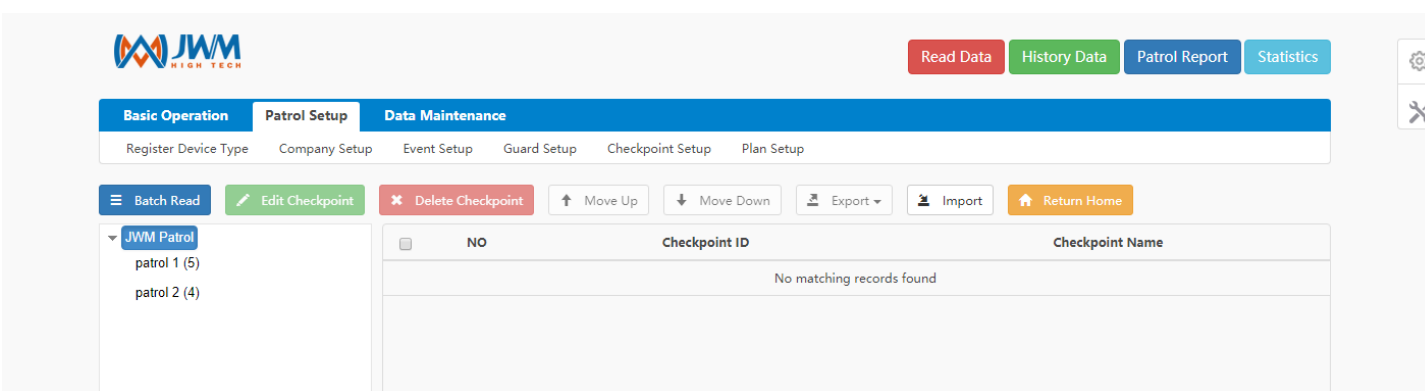

After reader read the checkpoint tags, and then click “Batch Read” to add checkpoints.

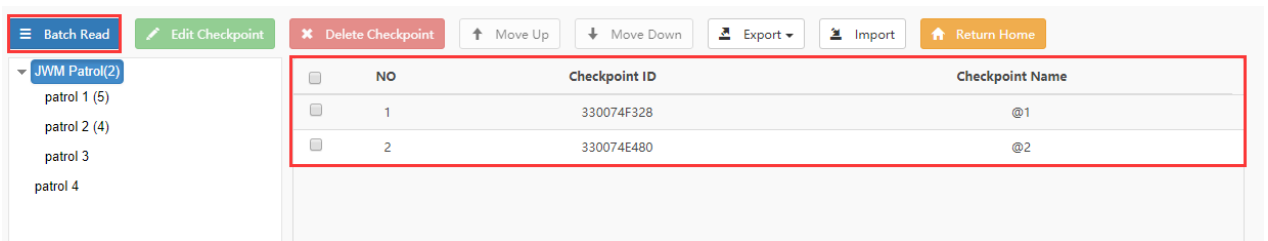

7 Event Setup (Optional)

After device read the event tags, and then click “Batch Read” to add events.

Basic Operation | **Patrol Setup** | Data Maintenance

Register Device Type | Company Setup | **Event Setup** | Guard Setup | Checkpoint Setup | Plan Setup

+ Add Event | Edit Event | Delete Event | Move Up | Move Down | **Batch Read** | Export | Import | Return Home

JWM Patrol

- patrol 1
- patrol 2
- patrol 3
- patrol 4

| NO | Event Code | Event Name |
|---------------------------|------------|------------|
| No matching records found | | |

In there, you can modify the event and delete event.

8 Guard Setup (Optional)

JWM HIGH TECH

Read Data | History Data | Patrol Report | Statistics

Basic Operation | **Patrol Setup** | Data Maintenance

Register Device Type | Company Setup | Event Setup | **Guard Setup** | Checkpoint Setup | Plan Setup

+ Add Guard | Edit Guard | Delete Guard | Move Up | Move Down | **Batch Read** | Export | Import | Return Home

JWM Patrol

- patrol 1 (1)
- patrol 2 (1)

| NO | Guard ID | Guard Name |
|---------------------------|----------|------------|
| No matching records found | | |



Basic Operation | **Patrol Setup** | Data Maintenance

Register Device Type | Company Setup | Event Setup | **Guard Setup** | Checkpoint Setup | Plan Setup


+ Add Guard | Edit Guard | Delete Guard | Move Up | Move Down | **Batch Read** | Export | Import | Return Home

JWM Patrol(2)

- patrol 1 (1)
- patrol 2 (1)
- patrol 3
- patrol 4




| NO | Guard ID | Guard Name |
|----|------------|------------|
| 1 | 330074F328 | @1 |
| 2 | 330074E480 | @2 |
| 5 | 330074E480 | @5 |
| 7 | 330074E358 | @7 |

After reader read the guard tags, and then click “Batch Read” to add guards.



In there, you can modify the guard and delete guard.

9 Plan Setup

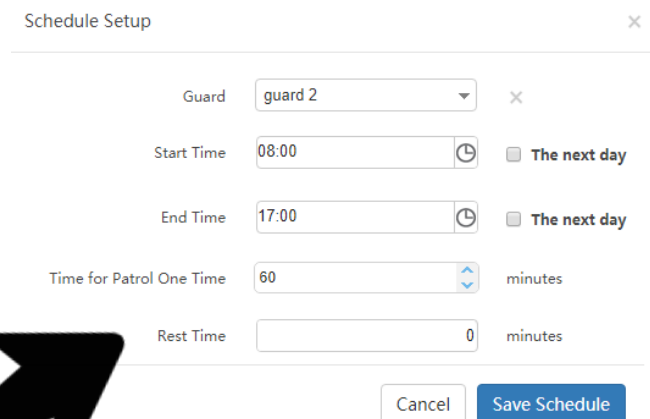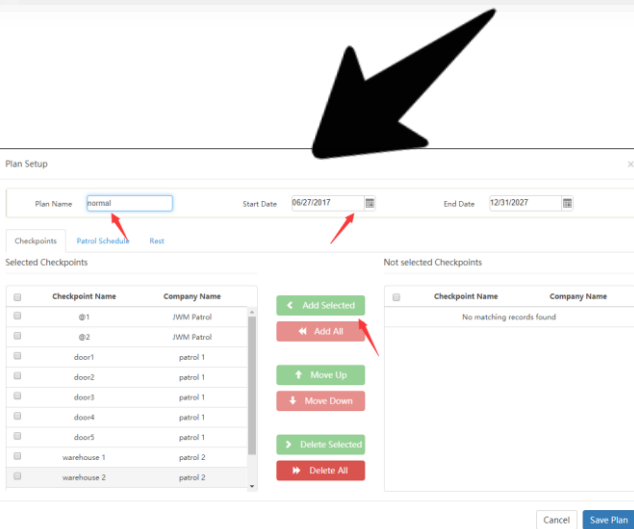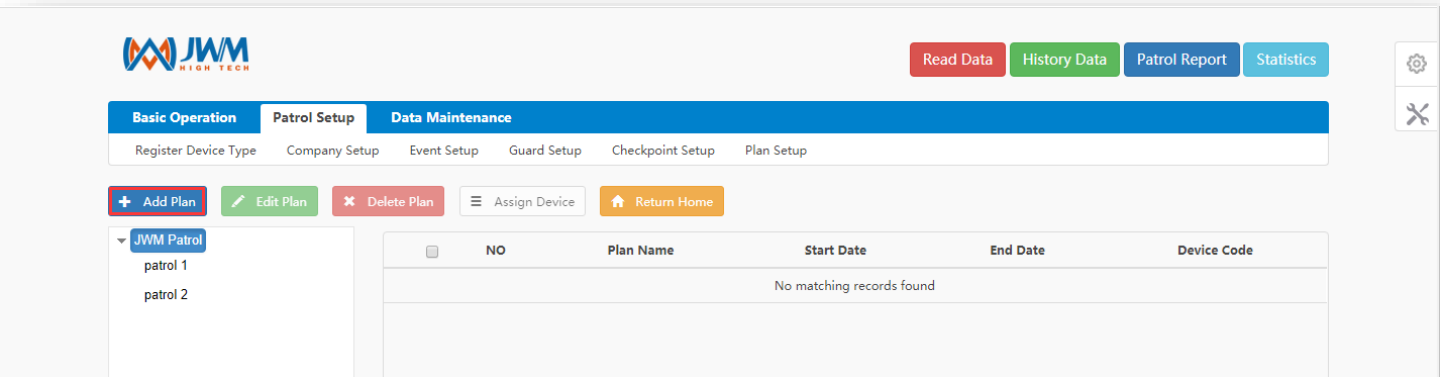

Week Rest

- Monday
- Tuesday
- Wednesday
- Thursday
- Friday
- Saturday
- Sunday

Special Rest

NO

| Rest |
|---------------------------|
| No matching records found |

六月 2017

| 日 | 一 | 二 | 三 | 四 | 五 | 六 |
|----|----|----|----|----|----|----|
| 28 | 29 | 30 | 31 | 1 | 2 | 3 |
| 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| 11 | 12 | 13 | 14 | 15 | 16 | 17 |
| 18 | 19 | 20 | 21 | 22 | 23 | 24 |
| 25 | 26 | 27 | 28 | 29 | 30 | 1 |
| 2 | 3 | 4 | 5 | 6 | 7 | 8 |

Add Rest Delete Rest

Cancel Save Plan



In there, you can select your security guard rest day for them.

And special rest is special rest for your security guard ,such as Christmas day.

+ Add Plan Edit Plan Delete Plan Assign Device Return Home

JWM Patrol

- patrol 1
- patrol 2
- patrol 3
- patrol 4

| NO | Plan Name | Start Date | End Date | Device Code |
|----|-----------|------------|------------|-------------|
| 1 | patrol 1 | 2017-06-13 | 2027-06-13 | -- |

Assign Reader: After you have assigned reader, this device only can patrolling this plan.




10 Report and Statistic

Noted: Please “Clear Device Data” and “Device Timing” before read tags.
 Click “Report Data Inquiry” to inquiry your report data. History data will show all your data


| Company Name | Plan Guard | Start Time | End Time | Plan Name | Plan Times | Arrived Times | Omission Times | Patrol Time |
|--------------|------------|---------------------|---------------------|-----------|------------|---------------|----------------|-------------|
| patrol 1 | Guard1 | 06/26/2017 09:00:00 | 06/26/2017 10:00:00 | patrol 1 | 5 | 0 | 5 | 0:00:00 |
| patrol 2 | guard 2 | 06/26/2017 09:00:00 | 06/26/2017 10:00:00 | patrol 2 | 4 | 0 | 4 | 0:00:00 |
| patrol 1 | Guard1 | 06/26/2017 10:10:00 | 06/26/2017 11:10:00 | patrol 1 | 5 | 0 | 5 | 0:00:00 |
| patrol 2 | guard 2 | 06/26/2017 10:10:00 | 06/26/2017 11:10:00 | patrol 2 | 4 | 0 | 4 | 0:00:00 |
| patrol 1 | Guard1 | 06/26/2017 11:20:00 | 06/26/2017 12:20:00 | patrol 1 | 5 | 0 | 5 | 0:00:00 |
| patrol 2 | guard 2 | 06/26/2017 11:20:00 | 06/26/2017 12:20:00 | patrol 2 | 4 | 0 | 4 | 0:00:00 |
| patrol 1 | Guard1 | 06/26/2017 12:30:00 | 06/26/2017 13:30:00 | patrol 1 | 5 | 0 | 5 | 0:00:00 |
| patrol 2 | guard 2 | 06/26/2017 12:30:00 | 06/26/2017 13:30:00 | patrol 2 | 4 | 0 | 4 | 0:00:00 |

Click on “Statistic” , you can see all your data being ordered as your need. And the report and statistic can be export to pdf and excel.

You see the patrol calendar on this page.

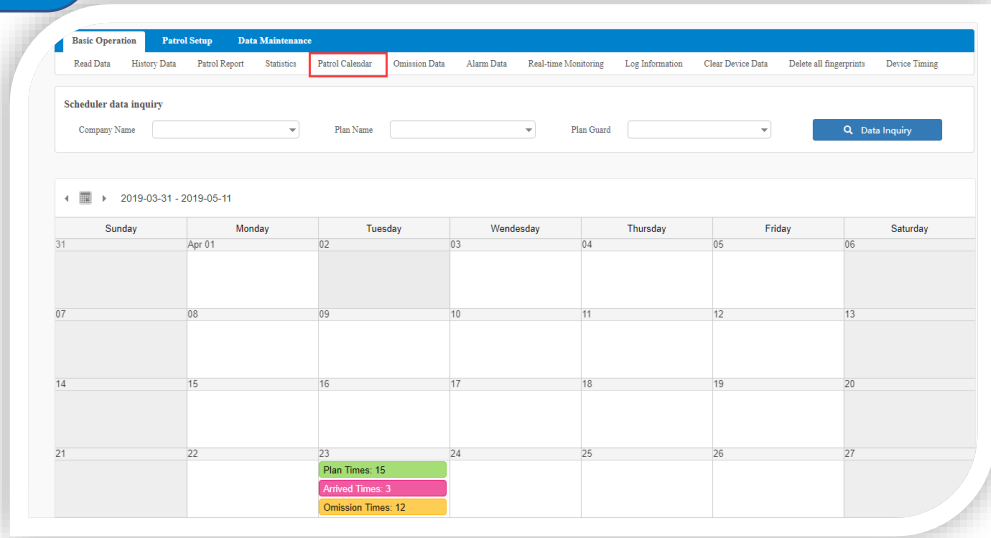

11 System Initialization

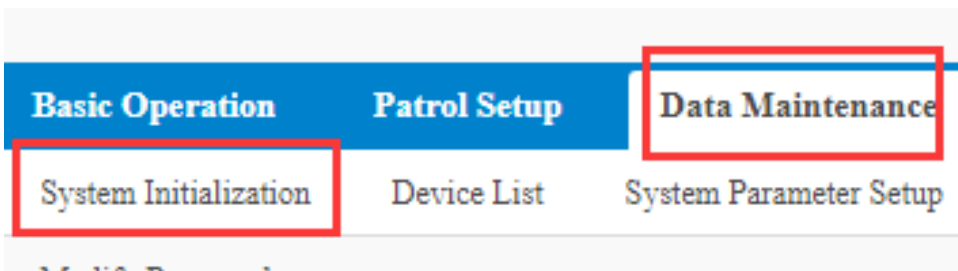

Noticed: If you click “system Initialization”, you will delete all the information under this account except device list and activate license. Please do not initialize system easily.

1. What devices are supported to log in to view data?

PC、 Mobile phone、 Pad (mobile phone and pad need install an APP. For Android system, please contact your sales manager. For IOS you can download at App Store, search “Cloud Patrol”).

2. Can two PCs log in the same account at the same time?

No. One account could not be logged in by two PCs at the same time, but you can create some new operators and set their permissions.

3. How to create new operators and set their permissions?

Click “Data Maintenance” and “Permission Setup”. Click “Add Role”. Input “Role Name” and click “Save”. Select the Role Name and select the permission items, then click “Save Role”.

Click “Operator Setup” and “Add operator”. Input the Operator name and Email (optional). Click “Save”. Select the Operator and click “Assign Permission”, then select the role at role list.

4. How to replace an activated device?

Click “Data Maintenance” and “Device List”, select the device and click “Replace Device”.

5. Can the report be exported?

Yes. The report could be exported to Excel and PDF.

6. How many operators can a company code create?

No limit.

7. How to get my sim card APN?

Call the sim card company or search in Google.

JWM-Patrol guard tour system



| sales@jwm-rfid.com