



# Wireless Keyboard

## IC-KP11

# User Manual

### Package Contents

- 1 x Number Pad
- 1 x USB-C Charging Cable
- 1 x User Manual


### Specifications

Connection Type	Bluetooth Low Energy
Connected Devices	Up to 3
Dimensions	148.3x125.4x10.9mm
Weight	160g ± 5g
Charge Time	2 hours
Working Time	186 hours
Lithium Battery Capacity	210 mAh
Material	ABS + Aluminum Frame
Frequency Band	2402MHz - 2480MHz
Maximum Transmission Power	0 dBm

### Charge the Keyboard

Output: DC 5V/200mA; **USB charger is not included.**  
 If you charge the keypad by charger, the voltage is higher than 7V, and the keypad will stop charging.

### Product Overview

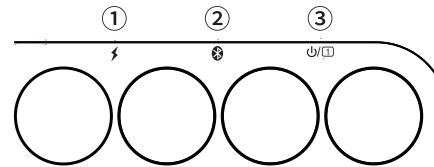

- ① Charging Indicator:** stay in red when charging and turn green after fully charging.
- ② Bluetooth Indicator:** Hold and press the "BT1/BT2/BT3" key for 5s to Bluetooth pairing, and the indicator will flash blue/green/red to Bluetooth pairing mode.
- ③ Power & Number Lock Indicator:** Power on the keyboard, and the indicator will be on for 3s. Press "numlk" to turn on/off the number lock function, and the indicator is on, the keypad works as numbers.  
**Note:** the indicator will be off if 6s is inactivity to power saving and you can press any key to wake it up.

### Compatibility

- ▶ iPadOS 13.0 or later iPad
  - ▶ macOS 10.12 or later Mac/iMac
  - ▶ Windows 8 or later PC/laptop with Bluetooth HID Profile
  - ▶ Android 9.0 or later smartphone
- Note: Not compatible with Windows 7 PC/laptop, Bluetooth adapter, Mac mini, Xbox, Samsung Smart TV, and Nokia phones.

### Special Keys

Keys	Description
	For Windows users, this key work as calculator. For Mac/iPad users, this key work as search.
	Click this key to Bluetooth channel 1. Hold and press this key for 5s to Bluetooth pairing.
	Click this key to Bluetooth channel 2. Hold and press this key for 5s to Bluetooth pairing.
	Click this key to Bluetooth channel 3. Hold and press this key for 5s to Bluetooth pairing.
	Works as insert and works for Windows only.
	For Windows users, press this key to turn on/off the number lock. When the indicator is on, keypad works as numbers. For Mac users, works as clear.

### Pairing Instruction

#### A. How to pair with Bluetooth devices?

##### Pair with the 1st device

- Step 1. Charge the keyboard for 2 hours for the first time use.
- Step 2. Slide the power switch to "ON" to power on the keyboard.
- Step 3. Press the "BT1" key to choose Bluetooth channel 1, then hold and press the "BT1" key for 5 seconds to pairing mode. The Bluetooth indicator will flash **Blue** and start to search for the available Bluetooth device.
- Step 4. Find the Bluetooth name "iClever KP11" and click to connect it. The Bluetooth indicator will be off.

##### How to find the name of "iClever KP11" ?

- ▶ For Windows 10: Click Windows logo > Setting > Devices > Bluetooth & other devices > Add Bluetooth or other device > Bluetooth > Click "iClever KP11" to connect it
- ▶ For MacBook/iMac: Click System Preferences > Bluetooth > Click "iClever KP11" to connect it
- ▶ For iPad/iPhone: Click Setting > Bluetooth > Click "iClever KP11" to connect it

#### Notes:

- ▶ the Bluetooth pairing name may be shown as Keyboard icon.
- ▶ keyboard will connect with the last-used device automatically.
- ▶ do not connect it via a Bluetooth adapter.
- ▶ if fail to connect, please read the FAQ.

#### Pair with the 2nd device

- Step 1. Press "BT2" key to choose Bluetooth channel 2, then hold and press "BT2" key for 5 seconds to pairing mode. The Bluetooth indicator will flash **GREEN** and start to search for the available Bluetooth device.
- Step 2. Find the Bluetooth name "iClever KP11" and click to connect it. The Bluetooth indicator will be off.

#### Pair with the 3rd device

- Step 1. Press "BT3" key to choose Bluetooth channel 3, then hold and press "BT3" key for 5 seconds to pairing mode. The Bluetooth indicator will flash **RED** and start to search for the available Bluetooth device.
- Step 2. Find the Bluetooth name "iClever KP11" and click to connect it. The Bluetooth indicator will be off.

#### B. How to switch between the connected device?

Press "BT1/BT2/BT3" key to switch back to the connected device.

#### C. How to re-pair the Bluetooth channel?

- Press "BT1/BT2/BT3" key to choose the Bluetooth channel 1/2/3 that you want to re-pair
- Hold and press "BT1/BT2/BT3" key for 5s to re-pair again.

### Contact

For more questions, please contact us by email: support@iclever.com

### FAQ

#### Q. Number keys are not working or work incorrectly.

- 1. Press "numlk" key once, and try it again.
- 2. Disable Turn on Mouse Keys:
  - 1)Open the Ease of Access Center — click the Start key, then click Control Panel > Ease of Access and then Ease of Access Center.
  - 2)Click Make the mouse easier to use.
  - 3)Under Control the mouse with the keyboard, unchecked Turn on Mouse Keys.
- 3. Disable Sticky Keys, Toggle Keys & Filter Keys:
  - 1)Open the Ease of Access Center — click the Start key, then click Control Panel > Ease of Access and then Ease of Access Center.
  - 2)Click Make the keyboard easier to use.
  - 3)Under Make it easier to type, make sure all checkboxes are unchecked.

#### Q. My keyboard fails to connect.

- 1. Charge the keyboard for 2 hours.
- 2. Make sure that your iClever device and computer are within close proximity of each other.
- 3. Try moving away at least 8 inches (20 cm) from metal and other sources of wireless signal.
- 4. Delete all the Bluetooth connection records. (For example, for iPad, click "Settings" > "Bluetooth" > under "MY DEVICE" to delete all the Bluetooth connection records)
- 5. On your device, turn off the Bluetooth and turn it on again to Refresh. (For example, for iPad, click "Settings" > "Bluetooth" > if the on-screen switch beside Bluetooth currently shows as ON, tap it twice to refresh it)

### FCC Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

