



Product Specification

Product Type: Commercial LCD Display

Product Model: M43MAQ

Version: V1.0

Technical Specifications

1. Product Features



- Equal-width bezels on all four sides
- 2 downward-facing USB ports
- Display mode: Landscape and Portrait (clockwise), forward tilt $\leq 15^\circ$ mounting supported
- Built-in speakers
- IPS panel
- PWM dimming
- 2K FHD display
- IR remote control
- Standard cloud playback and local playback
- Wi-Fi and RJ45 networking



2. Display Parameters

Size	42.5 inches
Screen Type	IPS
Response Time	8ms
Aspect Ratio	16:9
Max. Display Size	940.896(H)×529.254(V)mm
Resolution	1920(H)×1080(V)
Pixel Pitch	0.490mm×0.490mm
Refresh Rate	60Hz
Color Depth	16.7M(8bit)
Color Gamut (Typ)	72% NTSC
Contrast (Typ)	1200:1
Viewing Angle	178°/178°(H/V)
Backlight Type	DLED
Brightness (Typ)	1000/900 cd/m ² (panel brightness / after white balance adjustment)
Lifespan	≥30,000 hours

3. Operating System

OS Version	Android 9.0
RAM	1G
ROM	16G
CPU	Quad-Core A53
GPU	Mali-450MP2

4.Speakers

Channels	2.0
Power	2×2W

5.Electrical Parameters

Power Input	100-240V~50/60Hz 1.5A
Max. Power Consumption	125W
Standby Power Consumption	≤0.5W

6.I/O Interfaces

HDMI IN	1	Supports 1920×1080@60Hz
USB 2.0	2	System upgrade / data transfer
AUDIO OUT	1	3.5mm headphone jack
RJ45 IN	1	10/100Mbps

7.Size / Weight

Overall Dimensions (L×W×T)	960.7×550×57.8mm
Package Dimensions (L×W×H)	1059×137×652.5mm
VESA Hole Pattern (L×W)	400×200mm
Wall-Mount Screw Spec	M6
Net Weight	9.4kg
Gross Weight	11.9kg


8.Accessories

Power Cord	×1
Remote Control	×1
AAA Battery	×2

9. Environmental Factors

Working Temperature	0℃~40℃
Working Humidity	10%~80%RH
Storage Temperature	-10℃~55℃
Storage Humidity	10%~80%RH

10.Dimensions

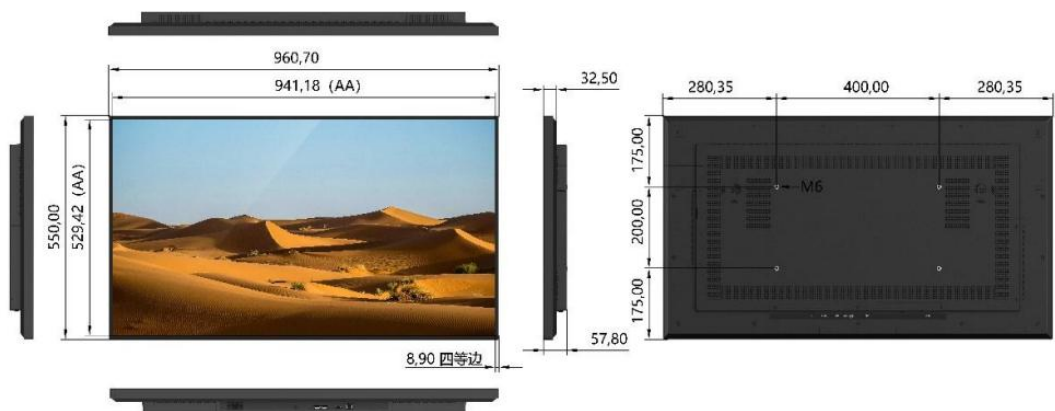

11.Disclaimer

The actual dimensions and weight of the device may vary due to product configuration and manufacturing process; please refer to the actual product.

The product images in this Specification are for illustration purposes only. The appearance of the actual product (including but not limited to look, color, and size) may differ slightly; please refer to the actual product.

In order to provide as accurate specification parameters as possible, the text descriptions and image effects in this Specification may be adjusted and revised in real time to match the actual product performance and specifications.

If it becomes necessary to make the above modifications and adjustments, no special notice will be given.

FCC Caution.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

*RF warning for Mobile device:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.



Shanghai Goodview Electronic Technology Co., Ltd. | Sales Hotline: 400-138-8858

Address: No. 458 Jinwan Road, Pudong New District, Shanghai | www.goodview.com